



BEETLE

Mini Cube

FEATURES

- Frame:** Metal
- Diffuser:** Polycarbonate
- Dimmable:** Yes
- Dimmer:** Not Included
- Bulb:** Included


BULB

LED 3000K 1 x 18W | 1600 lm

CERTIFICATION




SPECIFICATION SHEET



PHOTOMETRIC CURVE

DIAGRAMMA POLARE (cd/klm)

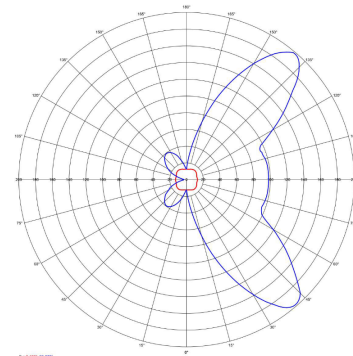

Modello: 18 40 70 50 100
Rendimento: CRI = 100,0; CRI = 50,0; LLOR = 50,0
Apertura fascio: C0-180 = 0,0°; C09-270 = 44,8°
Asimmetria: Max = 253,6 cd/klm; C = 150,0°; gamma = 113,0°
Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°

FRAME	DIFFUSER	LED COLOUR	CODE
<input type="radio"/> Matt White 9010	<input type="radio"/> White	Optionally	145009
<input type="radio"/> Matt White 9010	<input type="radio"/> White + Clear Ribbed	Optionally	145001



BEETLE

Medium Cube

FEATURES

- Frame:** Metal
- Diffuser:** Polycarbonate
- Dimmable:** Yes
- Dimmer:** Not Included
- Bulb:** Included


BULB

LED 3000K 1 x 18W | 1600 lm

CERTIFICATION





SPECIFICATION SHEET



PHOTOMETRIC CURVE

None

FRAME	DIFFUSER	LED COLOUR	CODE
 Matt White 9010	 White + Clear Ribbed	Optionally	145002

BEETLE AP-PL_AP1-PL1_AP4-PL4_AP5-PL5

Ita-Eng

2016.04.18

Wall & Ceiling | Mini Cube_Medium Cube

Small Pyramid_Medium Pyramid


220-240V 50/60 Hz

LED
3000K 17W | 1590 lm

Disinserire la tensione prima di operare sull'apparecchio

ISTRUZIONI DI MONTAGGIO


- 1) Rimuovere la struttura [C] dalla placca a muro [A] svitando le due viti laterali [E] (Fig.1)
- 2) Fissare la placca a muro [A] alla parete o al soffitto attraverso i fori asolati predisposti [G]
- 3) Collegare la linea principale ai morsetti [B] dello stabilizzatore e del cavo terra (vedi Fig.3)
Rispettare le polarità dei cavi: L - linea/marrone
N - neutro/azzurro G - terra/giallo-verde
- 4) Riposizionare la struttura [C] sulla placca a muro [A] e bloccarla avvitando le due viti laterali [E](Fig.1)
- 5) Inserire il diffusore [D] lievemente inclinato all'interno della fessura [X] dal lato della molla [M](Fig.2) Spingerlo contro la molla e ruotarlo fino ad inserirlo nella seconda fessura [Y]. Una volta parallelo al muro lasciarlo scorrere: la molla porterà il diffusore [D] nella corretta posizione centrale di blocco (Fig.4)
Nota: Per rimuovere il diffusore effettuare le operazioni del punto 5 in senso contrario

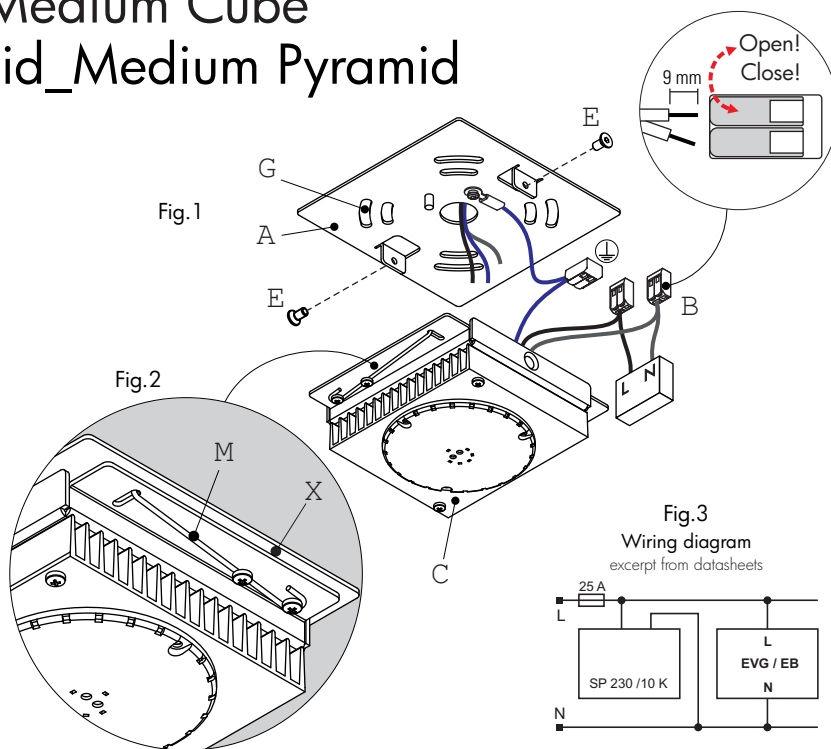

Before installing turn off the power to the electrical box

MOUNTING INSTRUCTIONS

- 1) Undo the screws [E] and separate the bracket [A] from the frame [C] (Fig.1)
- 2) Fix the bracket [A] to the wall or to the ceiling using appropriate fixings [G]
- 3) Connect the power cable with the terminals [B] of the protection module and with the terminal of the grounding cable (see Fig.3).
Pay attention to correct polarity: L - line/brown
N - neutral/blue G - ground/green-yellow
- 4) Place the frame [C] over the bracket [A] and secure it in position with the screws [E].
- 5) Insert the shade [D], slightly tilted, inside the slot [X] on the side where the spring [M] is located (Fig.2) Push the shade [D] against the spring [M] and then turn it until it reaches the slot [Y] (see detail on Fig.4) Let the shade [D] slide inside the slot [Y] to reach its final position.
Note: to remove the shade [D] follow the instructions at step 5 in reverse order

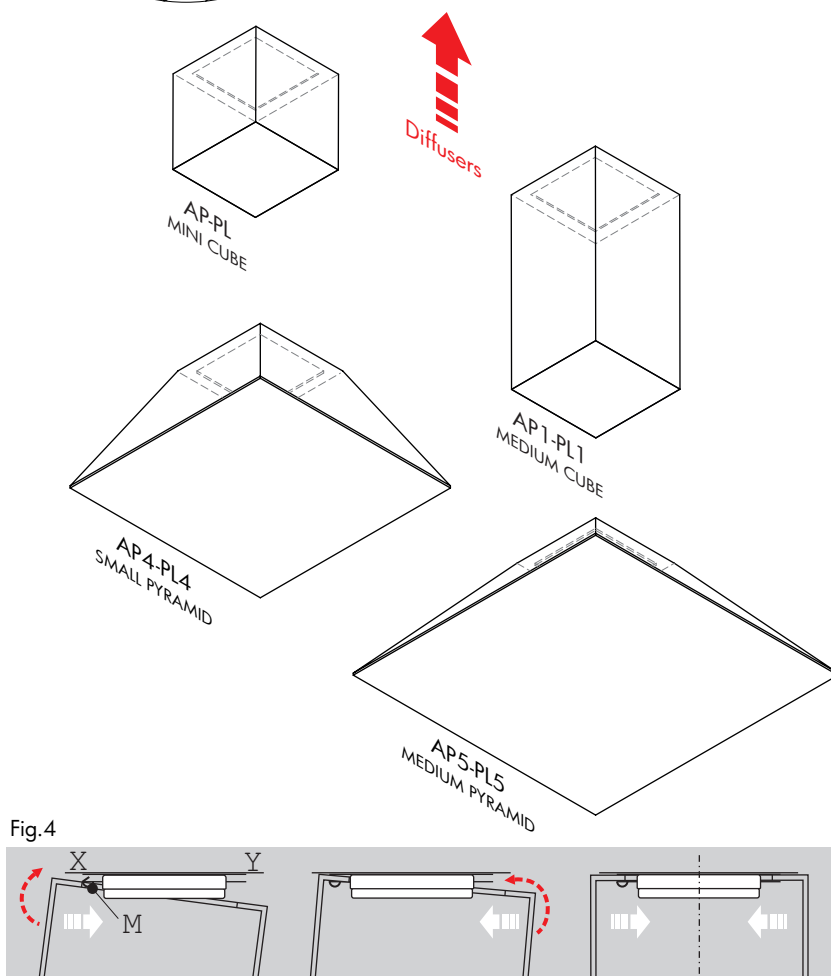

Studio Italia Design garantisce i suoi prodotti essere privi da difetti di materiale e di lavorazione per la durata di un anno dalla consegna. Durante tale periodo Studio Italia Design riparerà o sostituirà, a sua discrezione, i prodotti che hanno dato prova di difetto. Questa garanzia non è applicata a danni risultanti dall'incidente, alterazione, manomissione, abuso e negligenza. Ogni modifica ne può compromettere la sicurezza rendendo l'apparecchio pericoloso. Studio Italia Design declina ogni responsabilità per i prodotti modificati. L'apparecchio non deve essere installato in posizioni o in applicazioni diverse da quelle indicate nelle istruzioni di montaggio.

Studio Italia Design warrants its to be free from defects in materials and workmanship for a period of one year date of delivery. During this warranty period Studio Italia Design will repair or replace, at its option, product that are proven to be defective. This warranty does not apply to damages resulting from accidental, alteration, tampering, misuse, negligence or abuse. Any modification may compromise safety causing the product to become dangerous. Studio Italia Design declines all responsibility for products that are modified. Fixture must not be installed in any position or used in a different way than shown in his instructions.

Conservare le istruzioni per una manutenzione futura. Le operazioni indicate devono essere eseguite da personale qualificato
Keep these instructions for future reference. To be installed by a qualified licensed electrician only



STUDIO ITALIA DESIGN | Via Pialoi, 32, 30020, Marcon, Venezia, ITALY | www.studioitaliadesign.com | info@studioitaliadesign.com

STUDIO
ITALIA DESIGN