
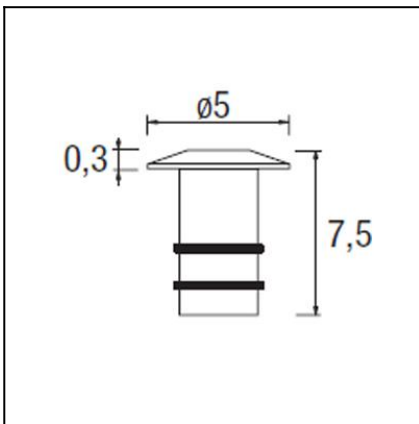


**OUT** 
**GEA**
**55-9254-54-37**



The photograph may not match the reference exactly. Please read the product description to identify the finish.

**TECHNICAL CHARACTERISTICS**

Type:	Downlight
IP Protection degrees:	IP68 (1m)
IK Protection degrees:	IK05
Recessed in-ground suitable for pedestrian crossing:	Si
Bulb:	1 x LED. Neutral white (5000 - 3700 K)
Power (W):	1W
Voltage / Frequency:	3V DC
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.255
EAN:	8435111049471


**MATERIALS / FINISHES**
**Structure material:** Anodized aluminium

**Diffuser material:** Glass


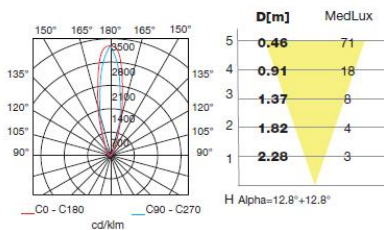
**Diffuser finish:** Transparent


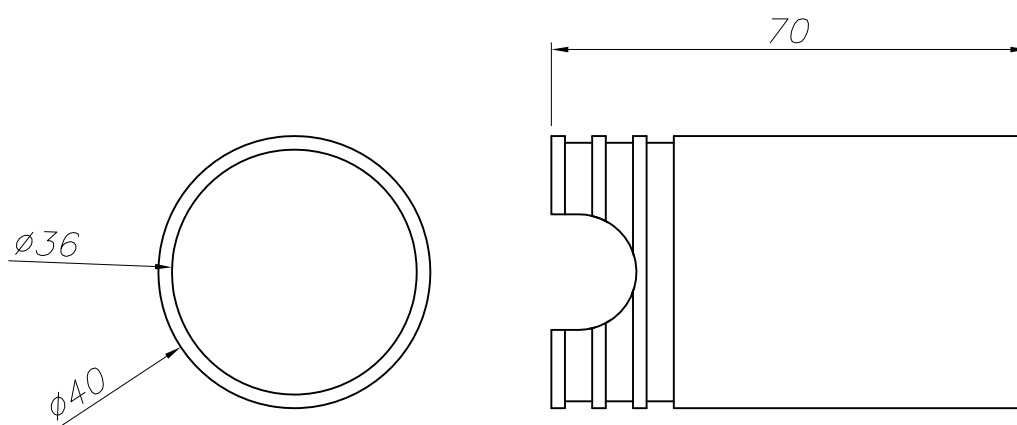
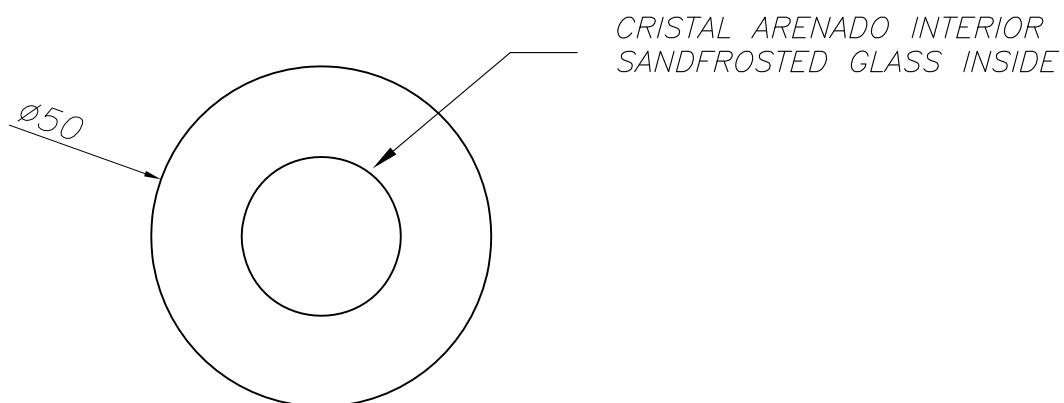
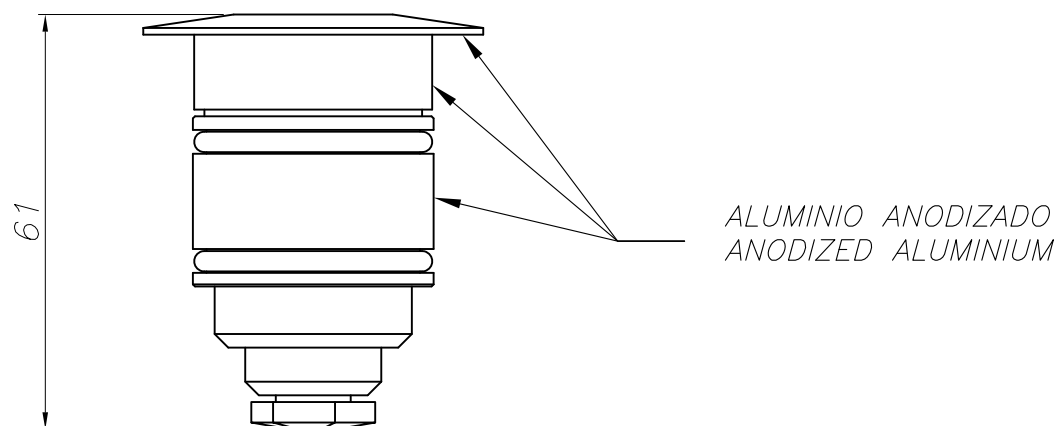
Download photometric file .ldt / .ies

<b>Luminaria</b>		<b>Ensayo</b>		<b>Lámpara</b>	
Código	55-9254-54-37	Código	55-9254-54-37	Código	55-9254-54-37
Nombre	Uplight 1W (led) 3V DC 300mA	Nombre	Uplight Led 1W IP68	Número	1
Familia	- LEDS-C4	Fecha	22-11-2008	Posición	UNIVERSAL
Eficiencia	99.97%	Sist. de Coordin.	C-G	Flujo Total	36.00 lm
Valor Máximo	3286.06 cd/klm	Posición	C=0.00 G=0.00	Bisimétrico	

Diam=40mm Incasso


Semiplanos C

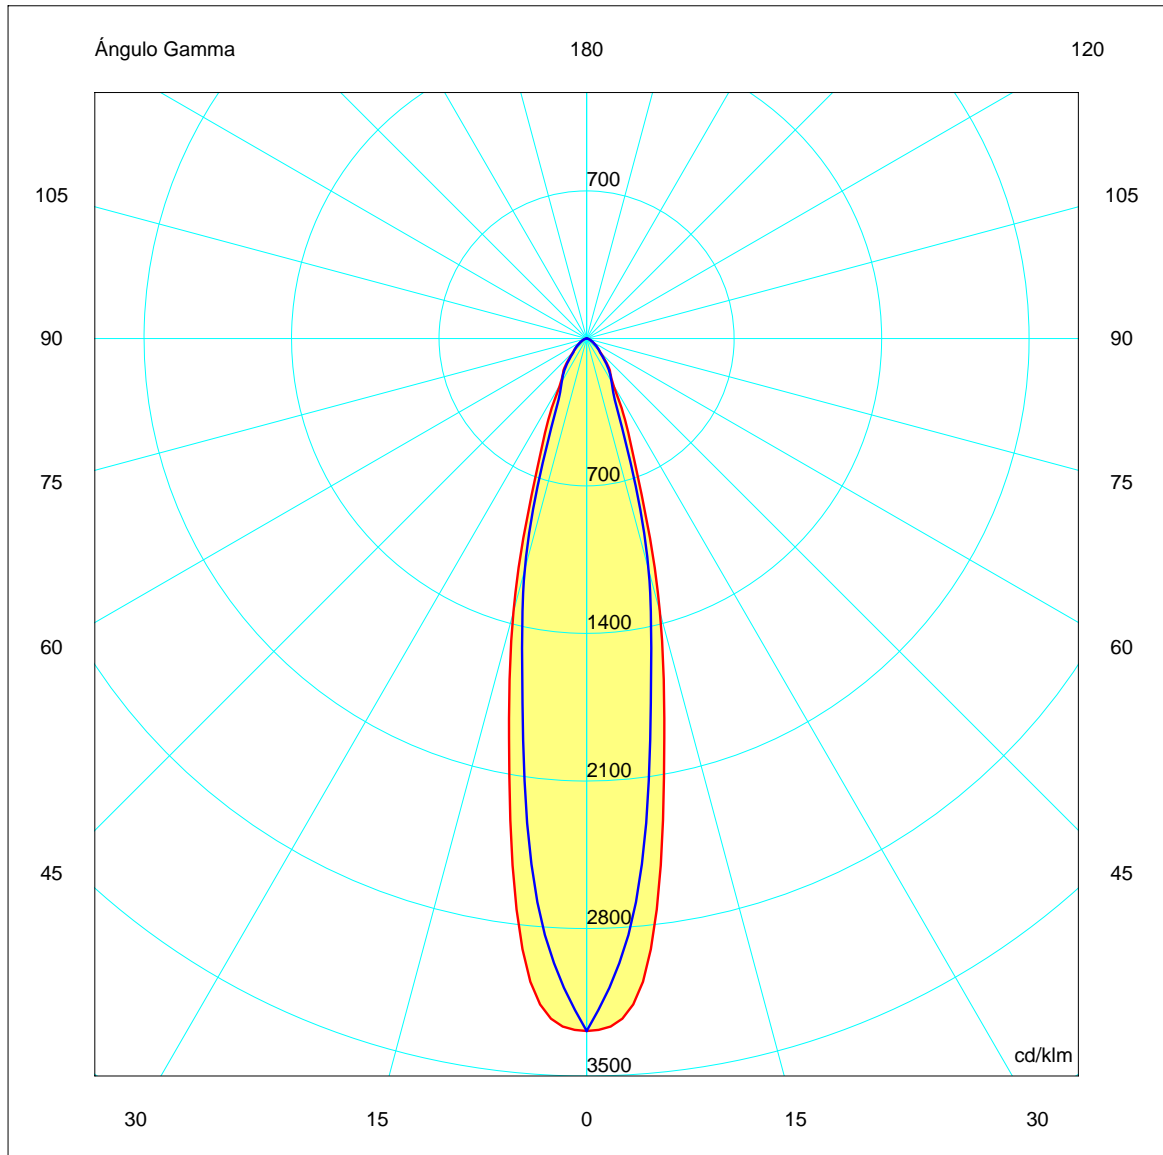




CAJA DE EMPOTRAR  
FLUSH FITTING BOX


①

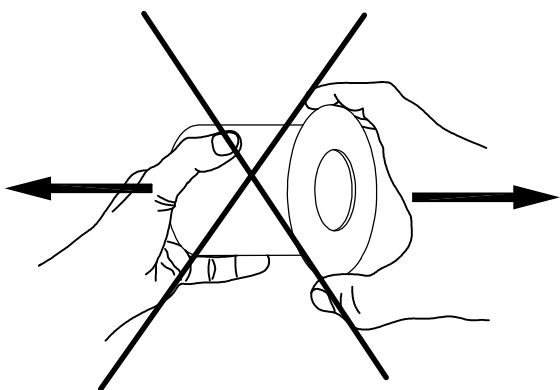


②

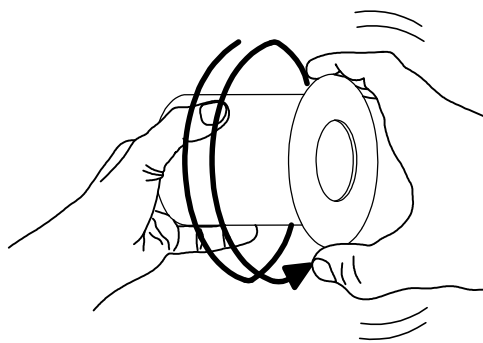


③

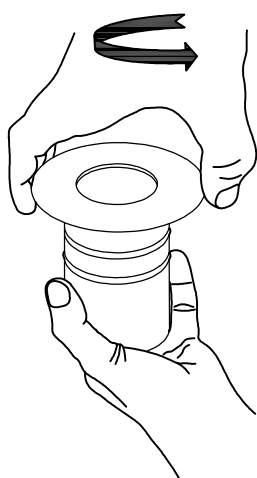

④

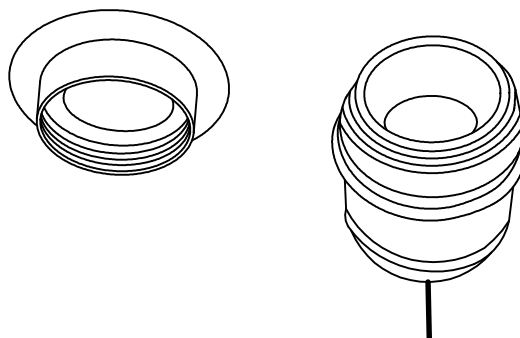

⑤

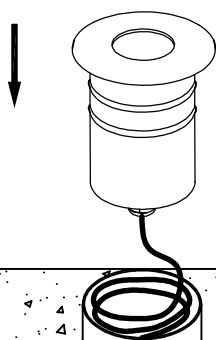

⑥

