




The photograph may not match the reference exactly. Please read the product description to identify the finish.

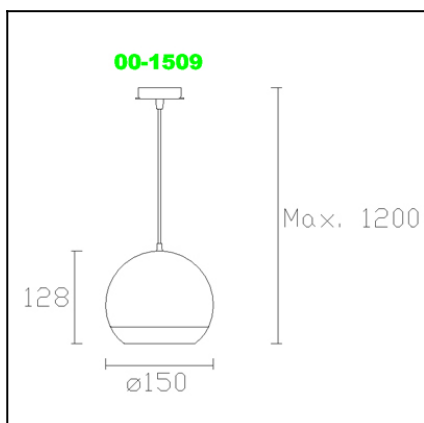

TECHNICAL CHARACTERISTICS

Type:	Pendant
IP Protection degrees:	IP20
Lampholder:	1 x GU10
Power (W):	GU10 75W
Total power consumption (W):	75
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	12
Net Weight (Kg):	0.68
EAN:	8435111097892,00



MATERIALS / FINISHES


Structure material:	Steel
Structure finish:	White Chrome

Download photometric file .ldt /.ies

Luminaire			Measurem.			Lamp	
Code	00-1509		Code	00-1509		Code	Halogen
Name	PENDANT LAMP		Name	PENDANT LAMP		Number	1
Line	IESNA-1995		Date	15-11-2013		Position	
Efficiency		60.24%	Coordinate system		CG	Total Flux	
Maximum value		1976.74 cd	Position		C=330.00 G=2.00	Asymmetrical	
Rectangular Luminaire		Length	100 mm	Width	100 mm	Height	1 mm
Rectangular Luminous Area		Length	100 mm	Width	100 mm	Height	0 mm
Horizontal Luminous Area		0.010000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002419 m2	
Symmetry Type		Asymmetrical		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		650.00 lm	
Operator		25.00 °C 60.00 %		Source voltage			
Temperature				Source current			
Humidity				Photocell			
Notes							


Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
IESNA-1995	Halogen	ES-111-75W - 72.50 W	650.00	72.50	1
C.I.E.	83 95 99 100 60	D DIN 5040			
F UTE	0.60 B	B NBN	A60	BZ 1	


100mm x 100mm




C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 60.24 %
 RN 0.00 %

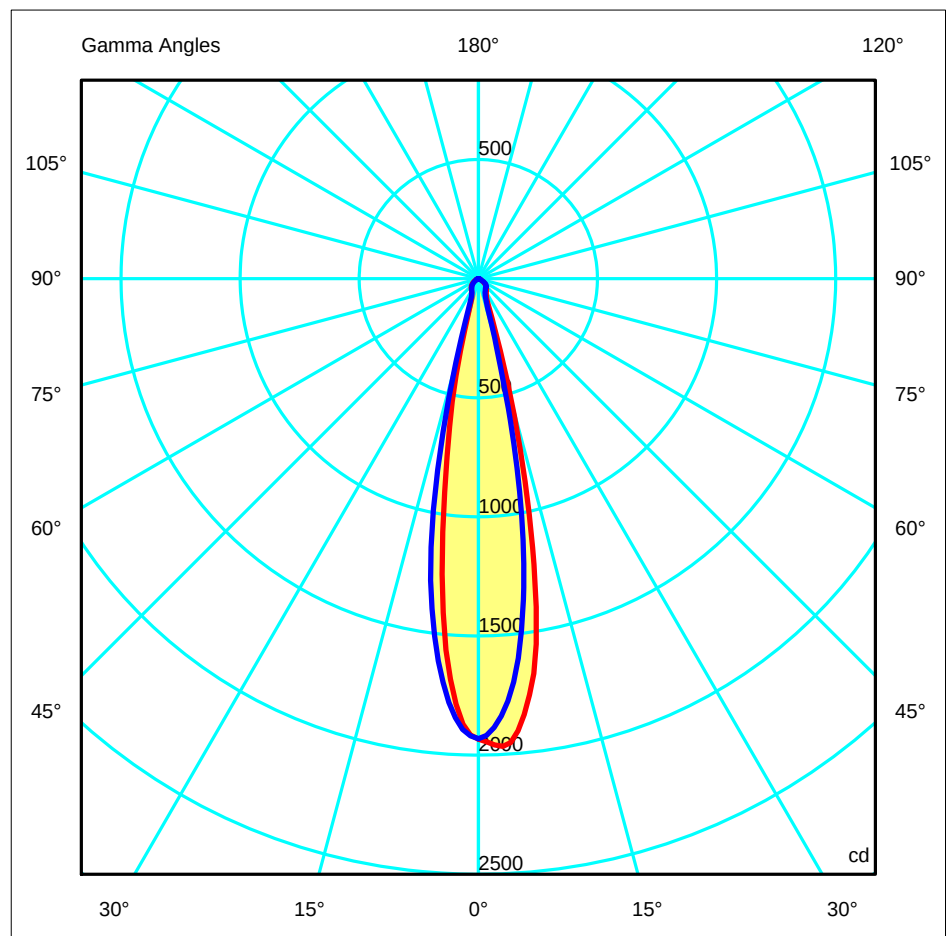





1

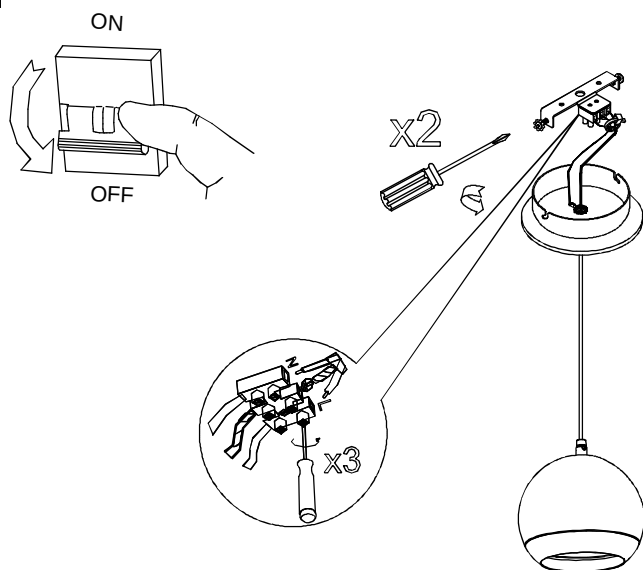


2

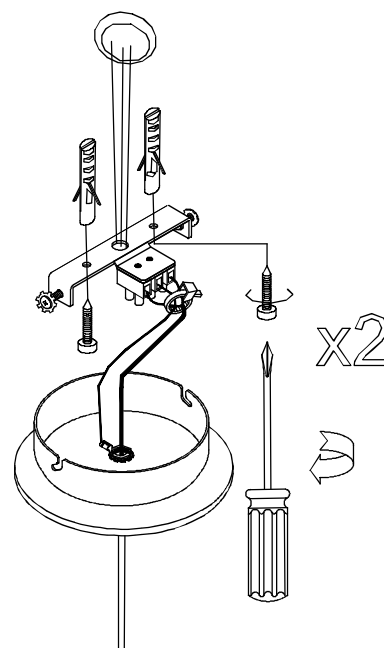


3

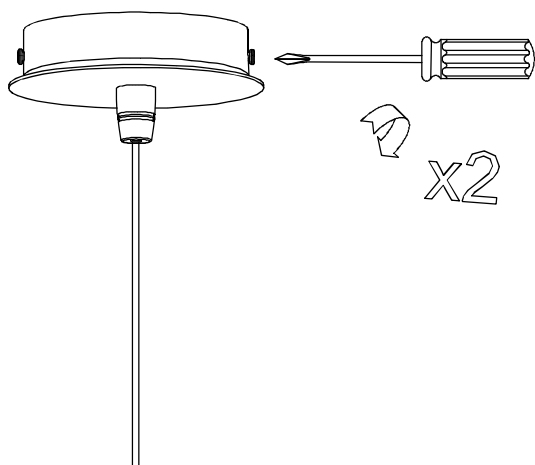

4

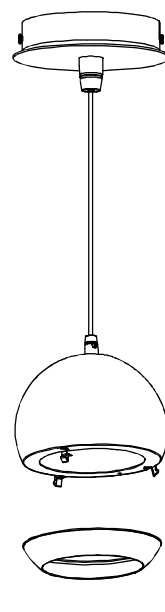

5

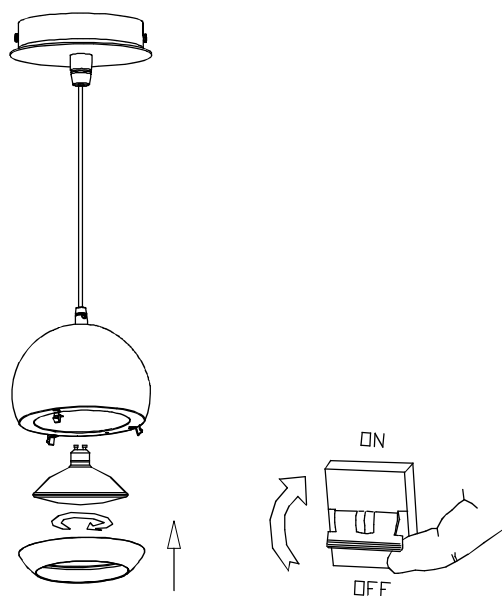

6

