


Design by Nahtrang Design



The photograph may not match the reference exactly. Please read the product description to identify the finish.

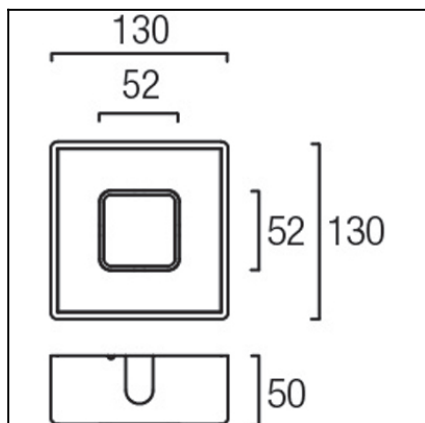

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Bulb:	2 x LED Samsung. Warm White - 3000K
Power (W):	2x4W
Total power consumption (W):	8
Luminous efficacy (Lm/W):	45
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	12
Net Weight (Kg):	0.59
EAN:	8435111091524,00



MATERIALS / FINISHES


Structure material:	Aluminium Steel	Diffuser material:	Methacrylate
Structure finish:	Matt white Chrome	Diffuser finish:	Transparent

Download photometric file .ldt /.ies

Luminaire			Measurem.			Lamp	
Code	05-0047-BW-BW		Code	05-0047-BW-BW		Code	05-0047-BW-BW
Name	Aplique LOW leds 2x4W		Name	Aplique leds LOW 2x4W		Number	1
Line	- LEDS C4 LEDS		Date	18-03-2013		Position	Universal
Efficiency		100.00%	Coordinate system		CG	Total Flux	400.23 lm
Maximum value		106.66 cd	Position		C=90.00 G=10.00	Asymmetrical	
Rectangular Luminaire		Length	50 mm	Width	130 mm	Height	130 mm
Rectangular Luminous Area		Length	25 mm	Width	30 mm	Height	130 mm
Horizontal Luminous Area		0.000750 m2	Emitting area on Plane 180°			0.003250 m2	
Emitting area on Plane 0°		0.003250 m2	Emitting area on Plane 270°			0.003900 m2	
Emitting area on Plane 90°		0.003900 m2	Glare area at 76°			0.003335 m2	
Symmetry Type		Asymmetrical	Maximum Gamma Angle			180	
Measurement Distance		6.44	Measurement Flux			400.23 lm	
Operator		Asselum T2	Source voltage			230.00 V	
Temperature		20.00 °C	Source current				
Humidity		48.00 %	Photocell			PRC	
Notes							

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
- LEDS C4 LEDS	05-0047-BW-BW	Lámpara led blanco cálido 8W	400.23	8.00	1
C.I.E.	62 83 95 50 100	D DIN 5040			
F UTE	0.50 C + 0.50 T	B NBN			
		C51			
		BZ 3 / 4 / BZ 4			


50mm x 130mm



C Halfplanes




180.0 — 0.0
270.0 — 90.0

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

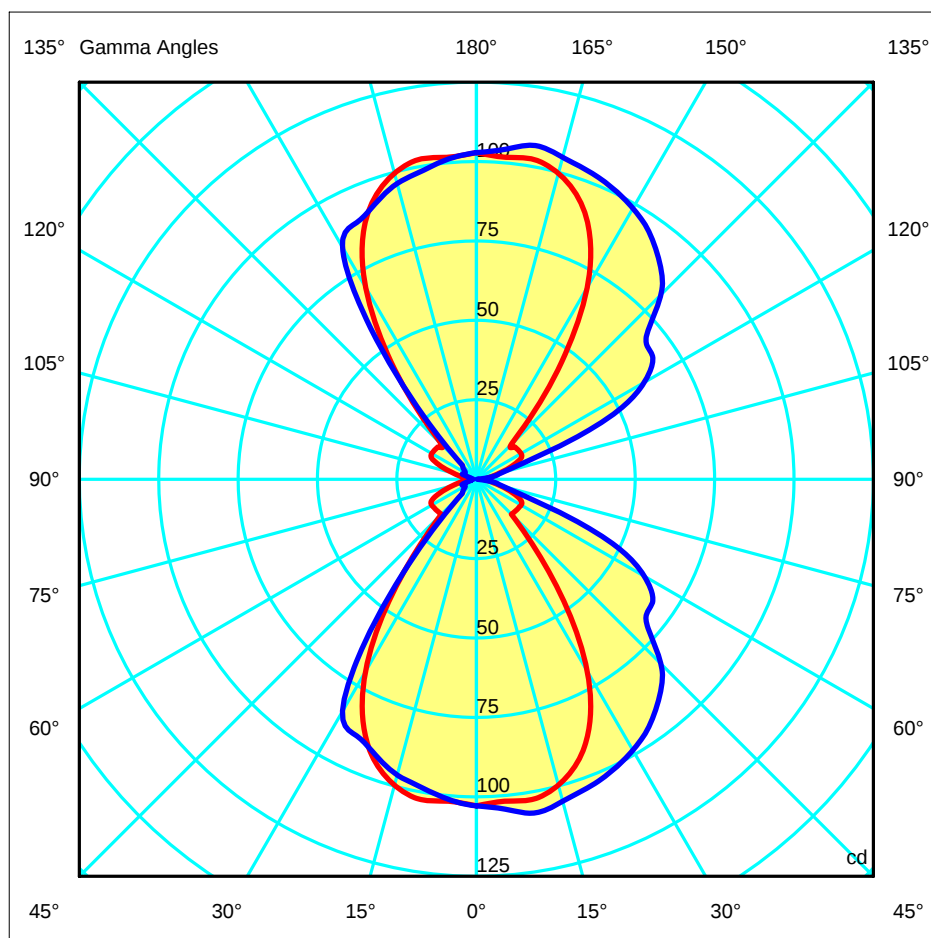


steel (matt white/chrome) /
acero (mate blanco/cromado)

aluminum(matt white) /
aluminio (mate blanco)

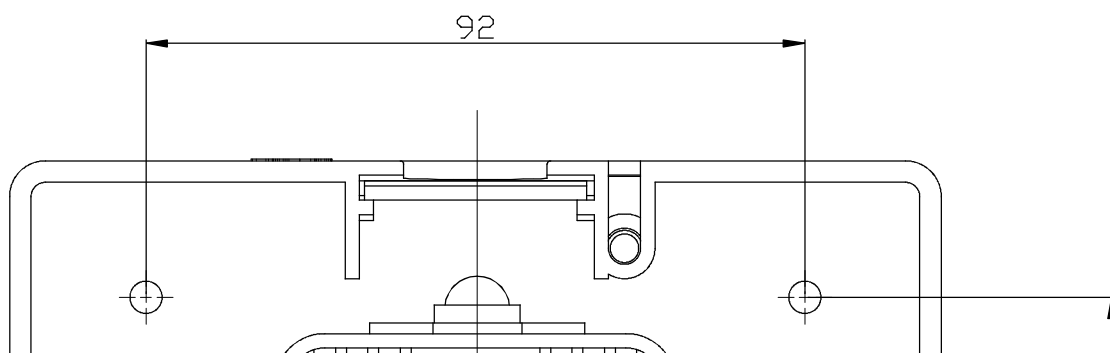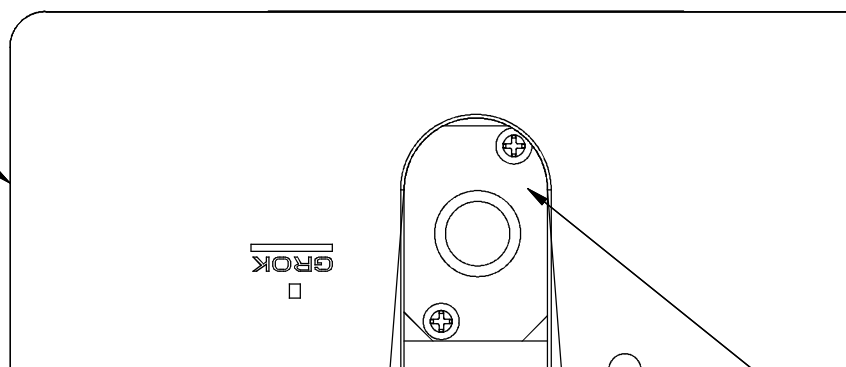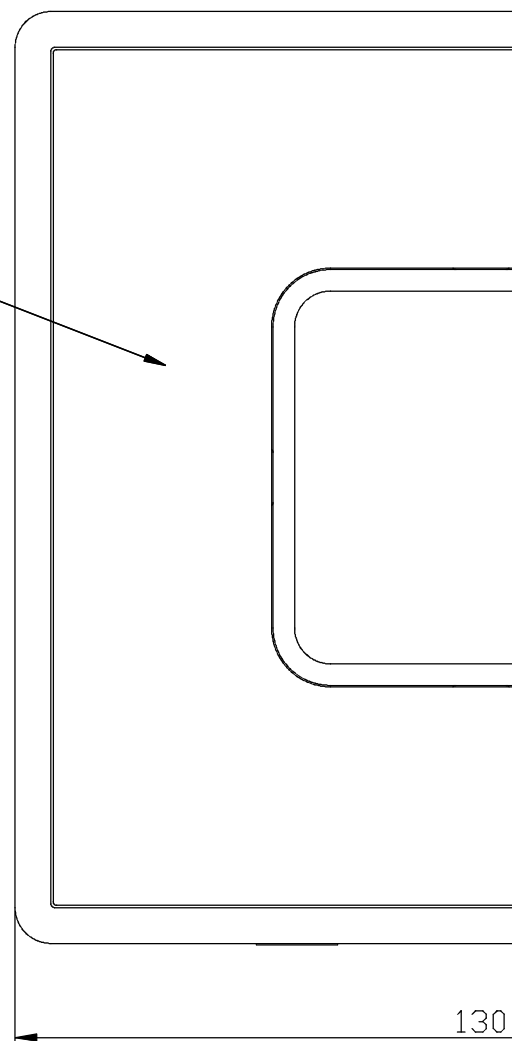


acr
acr


1

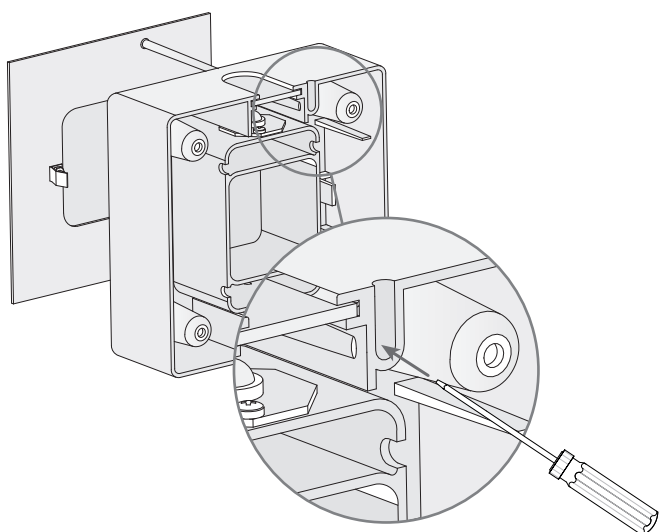


2

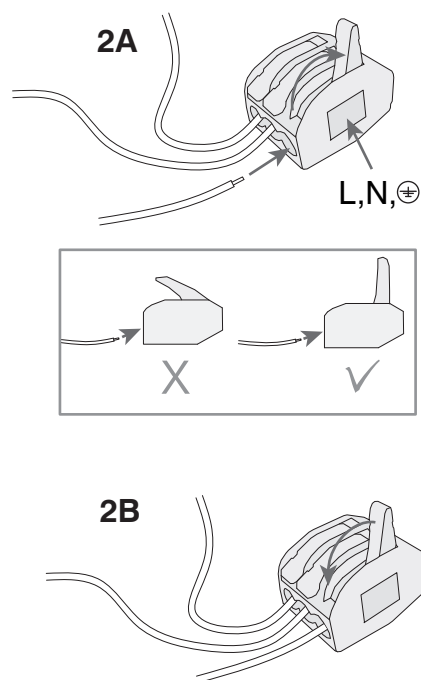


3

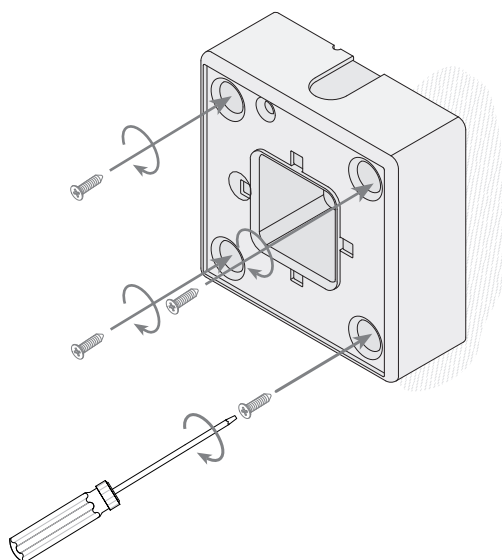

4

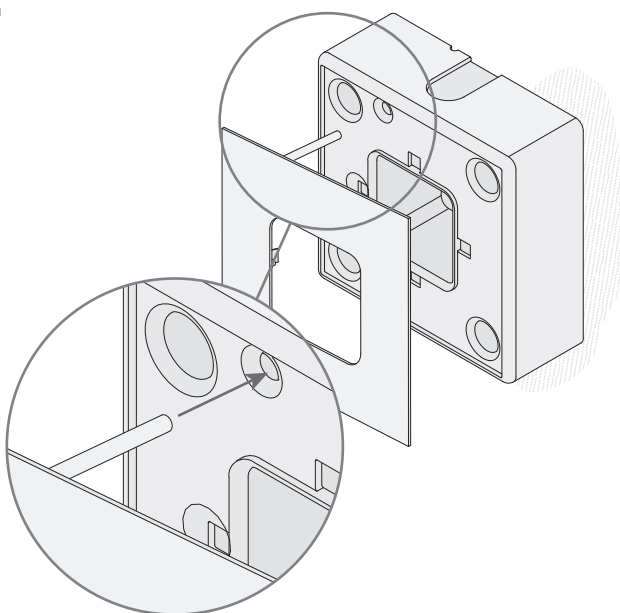

5

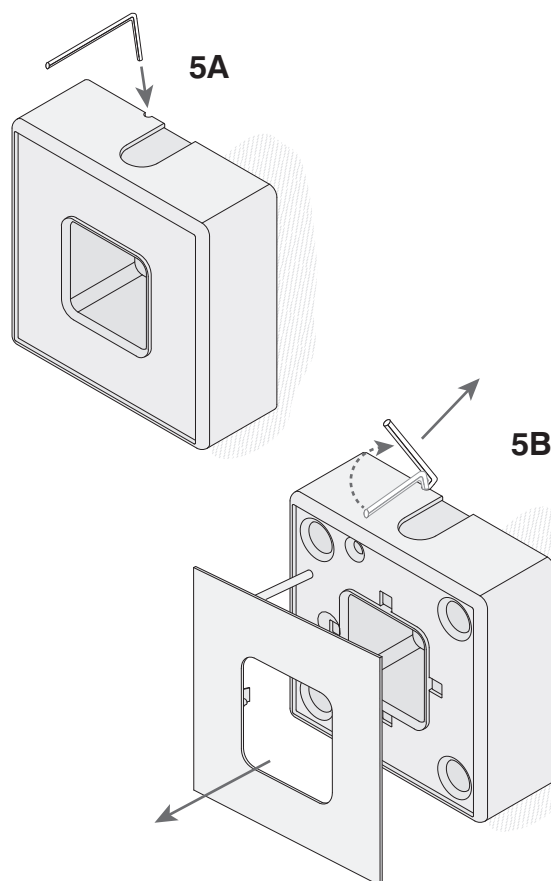

6

