


Design by Nahtrang Design




The photograph may not match the reference exactly. Please read the product description to identify the finish.

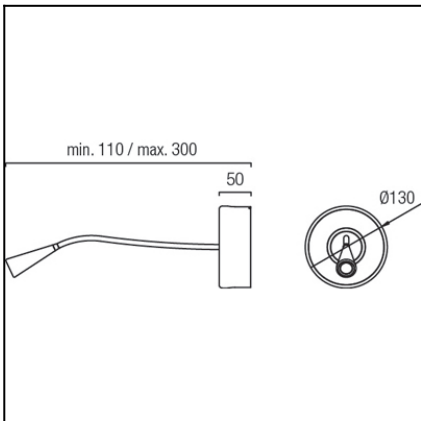

Download photometric file .ldt /.ies

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Bulb:	2 x LED Samsung. Warm White - 3000K 1 x LED Cree. Warm White - 3000K
Power (W):	8W 3W
Total power consumption (W):	12.5
Luminous efficacy (Lm/W):	45, 73
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	8
Net Weight (Kg):	0.795
EAN:	8435111091784,00



MATERIALS / FINISHES

Structure material:	Injected aluminium Steel	Diffuser material:	Methacrylate
Structure finish:	Matt white Chrome	Diffuser finish:	Transparent


GEAR

Multi-voltage electronic gear included (220-240V / 50-60 Hz)


Luminaire		Measurem.		Lamp	
Code	05-0658-BW-BW	Code	05-0658-BW-BW	Code	05-0658-BW-BW
Name	Aplique LOW leds 2x4W + 3W	Name	Aplique leds LOW 2x4W + 3W	Number	1
Line	- LEDS C4 LEDS	Date	18-03-2013	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	515.50 lm
Maximum value	924.41 cd	Position	C=270.00 G=40.00	Sym. on planes 270-90	
Round Luminaire		Diam.	130 mm	Height	300 mm
Round Luminous Area		Diam.	17 mm	Height	0 mm
Horizontal Luminous Area	0.000227 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°	0.000055 m2		
Emitting area on Plane 90°	0.000000 m2				
Symmetry Type	Sym. on planes 270-90	Maximum Gamma Angle	180	Measurement Flux	515.50 lm
Measurement Distance	6.44				
Operator	Asselum T2	Source voltage	230.00 V		
Temperature	20.00 °C	Source current			
Humidity	49.00 %	Photocell	PRC		
Notes					




Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
- LEDS C4 LEDS	05-0658-BW-BW	Lámpara led blanco cálido 11W	515.50	11.00	1
C.I.E.	59 87 97 59 100	D DIN 5040			
F UTE	0.59 D + 0.41 T	B NBN			
		C41			
		BZ 3 / 3 / BZ 4			

Diam=130mm

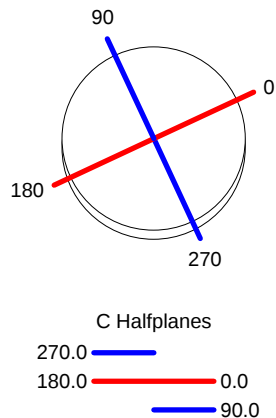


ULOR 40.85 %
DLOR 59.15 %
RN 40.85 %

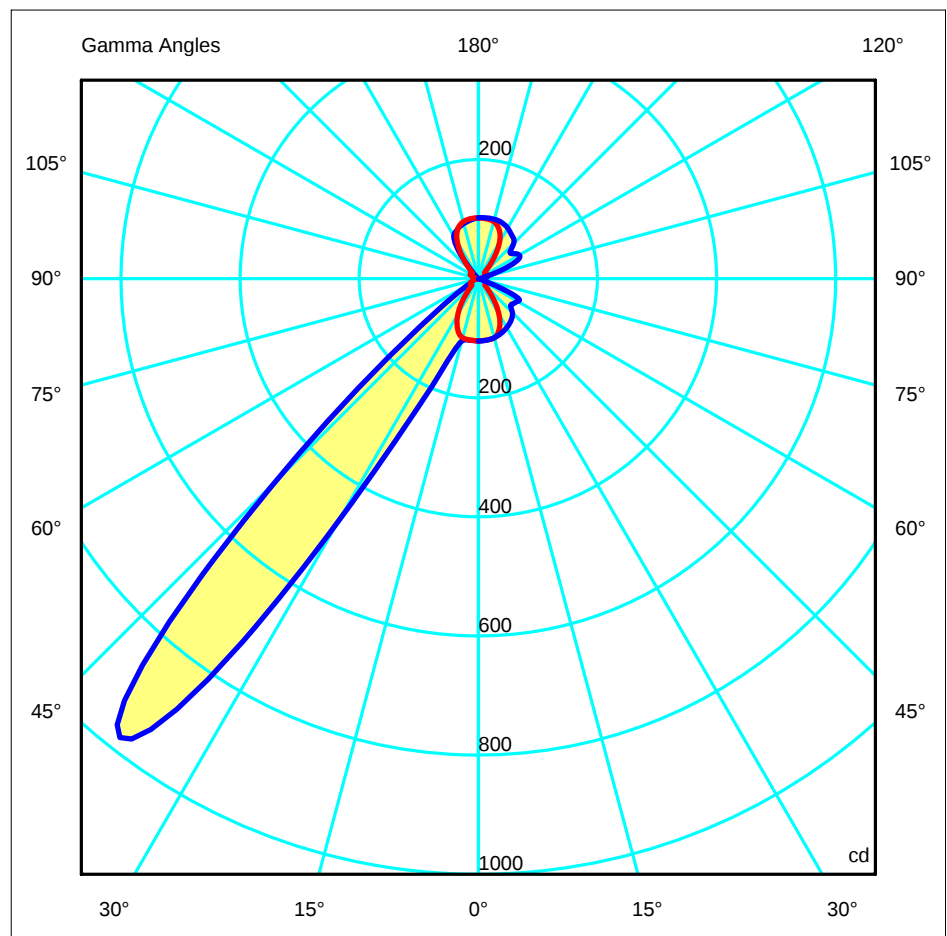


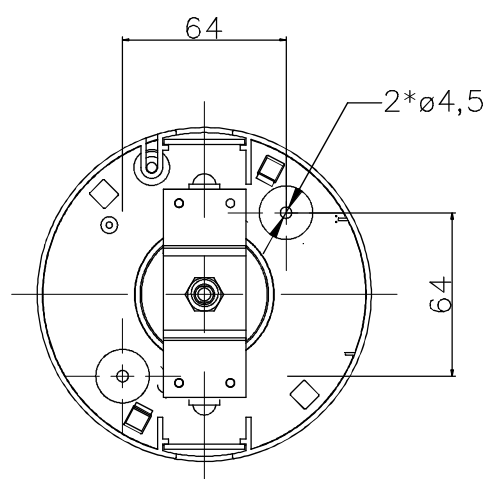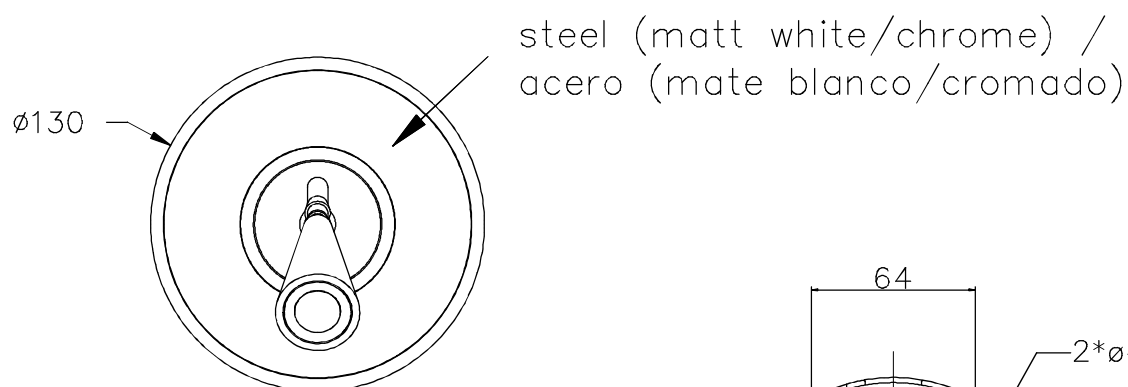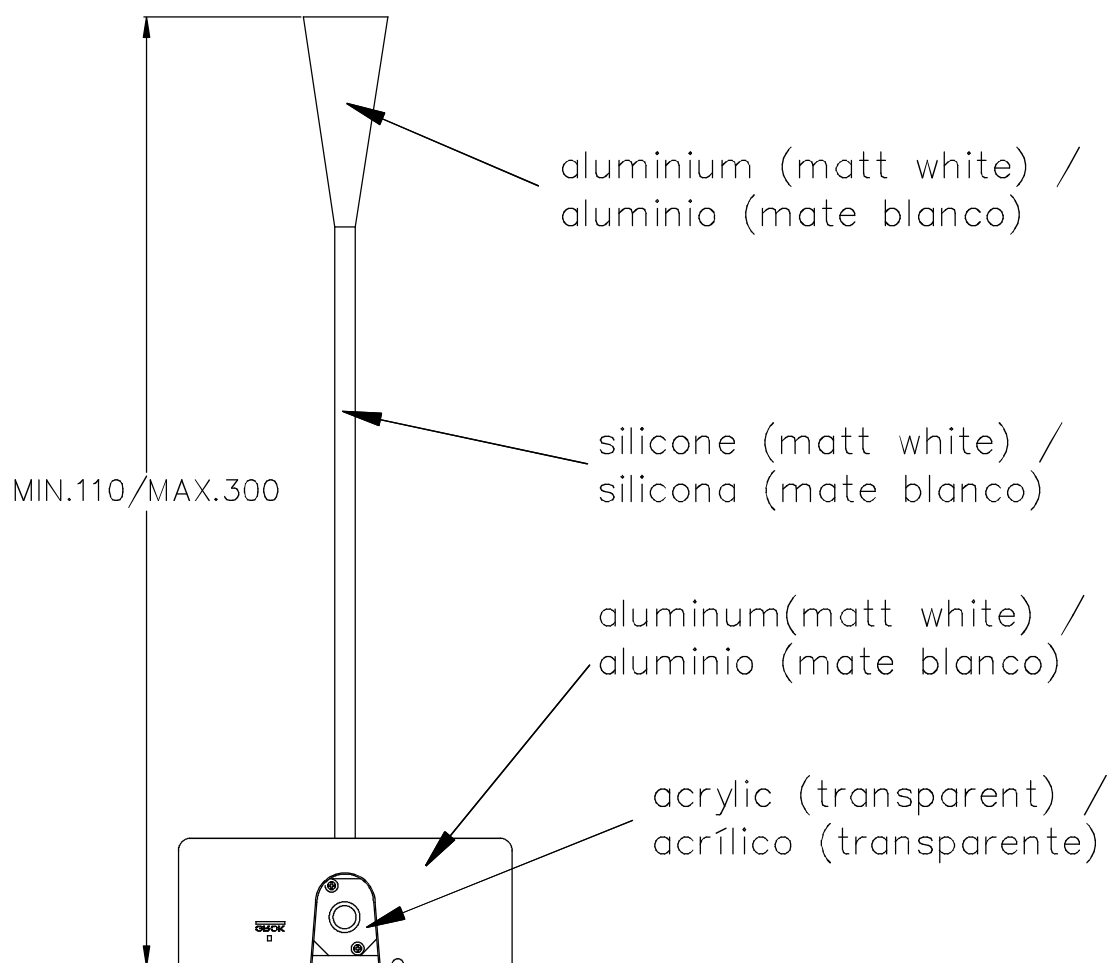


1

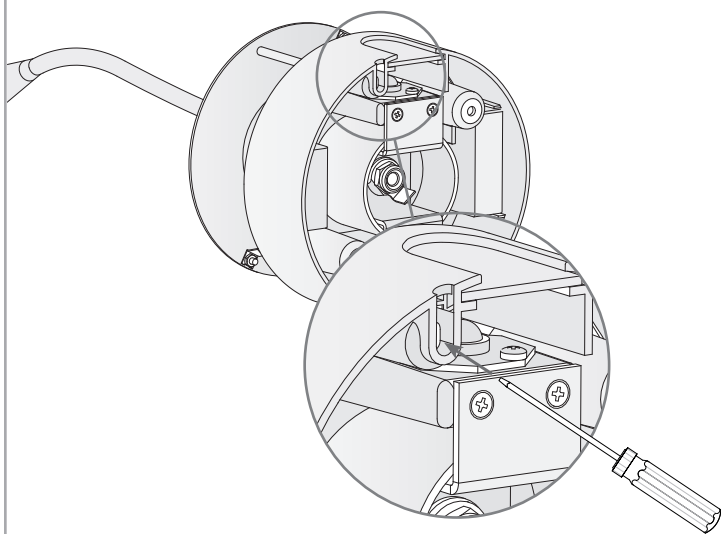


2

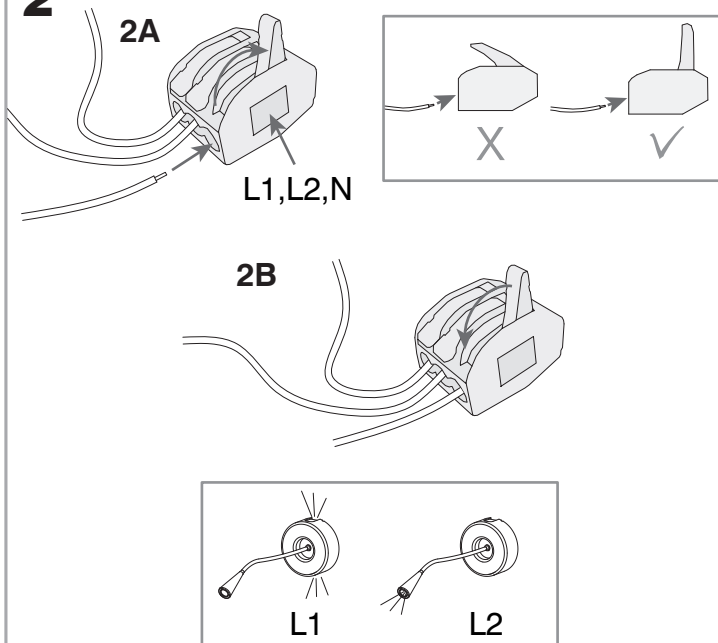


3

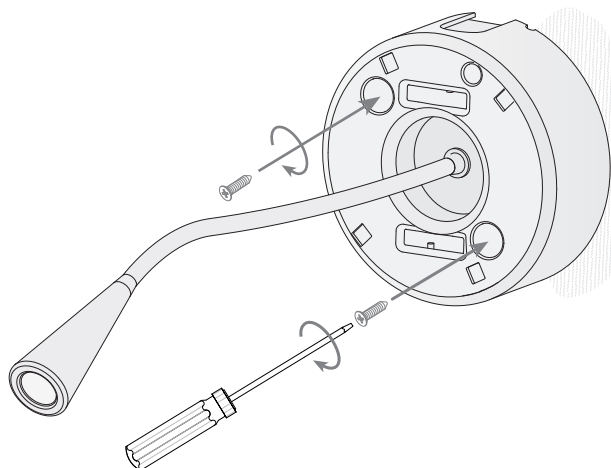

4

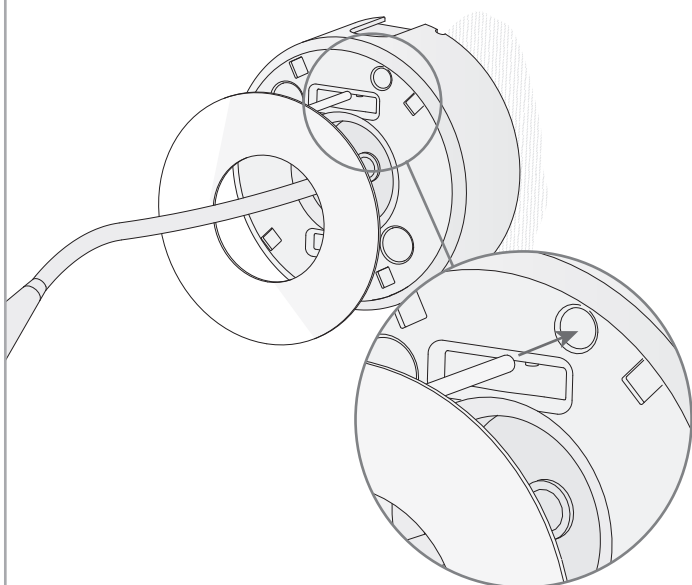

5

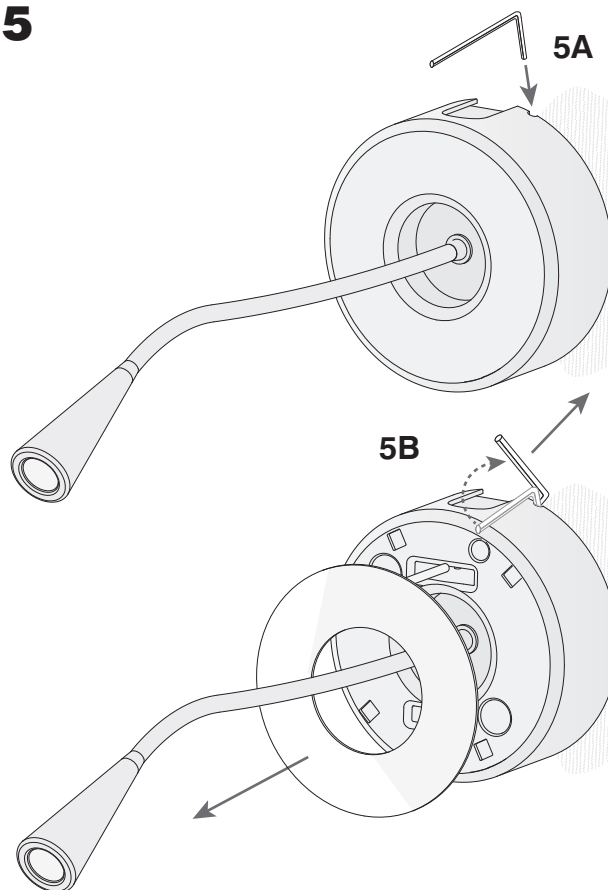

6

