


The photograph may not match the reference exactly. Please read the product description to identify the finish.

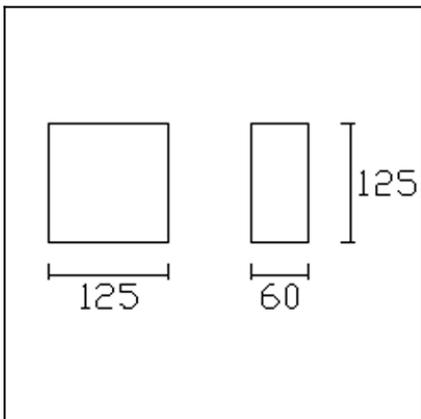

Download photometric file .ldt /.ies

DESCRIPTION

Downlights suitable for recessed installation on ceilings. Body produced in gypsum with steel fixation clips. Suitable for halogen lamps and LED lights. Different models according to shape, rotation options and number of bulbs. Complete architecture integration with the use of thermoplastic paint. Option of including the GU10 lampholder as an accessory.

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Bulb:	2 x LED Cree. Warm White - 3000K
Power (W):	LED 4W
Luminous efficacy (Lm/W):	75
CRI:	80
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	10
Net Weight (Kg):	0.705
EAN:	8435381404871,00



MATERIALS / FINISHES

Structure material: Plaster

Structure finish: White


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp		
Code	05-1798	Code	05-1798	Code	LED	
Name	LED WALL LIGHT	Name	LED WALL LIGHT	Number	2	
Line	GES	Date	15-11-2013	Position		
Efficiency	78.96%	Coordinate system	CG	Total Flux	186.00 lm	
Maximum value	230.91 cd/klm	Position	C=0.00 G=169.00	Asymmetrical		
Rectangular Luminaire	Length	1 mm	Width	1 mm	Height	1 mm
Rectangular Luminous Area	Length	1 mm	Width	1 mm	Height	0 mm
Horizontal Luminous Area	0.000001 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000000 m2		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		186.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
IESNA-1995	LED	CREE XBD - 2.60 W	93.00	2.60	2	
C.I.E.	53 76 90 49 79	D DIN 5040	C42			
F UTE	0.39 D + 0.40 T	B NBN	BZ 3 / 0.6 / BZ 4 / 1.5 / BZ 5			

1mm x 1mm



C Halfplanes


180.0 ——— 0.0



270.0 ——— 90.0

ULOR 39.91 %



DLOR 39.06 %

RN 50.54 %

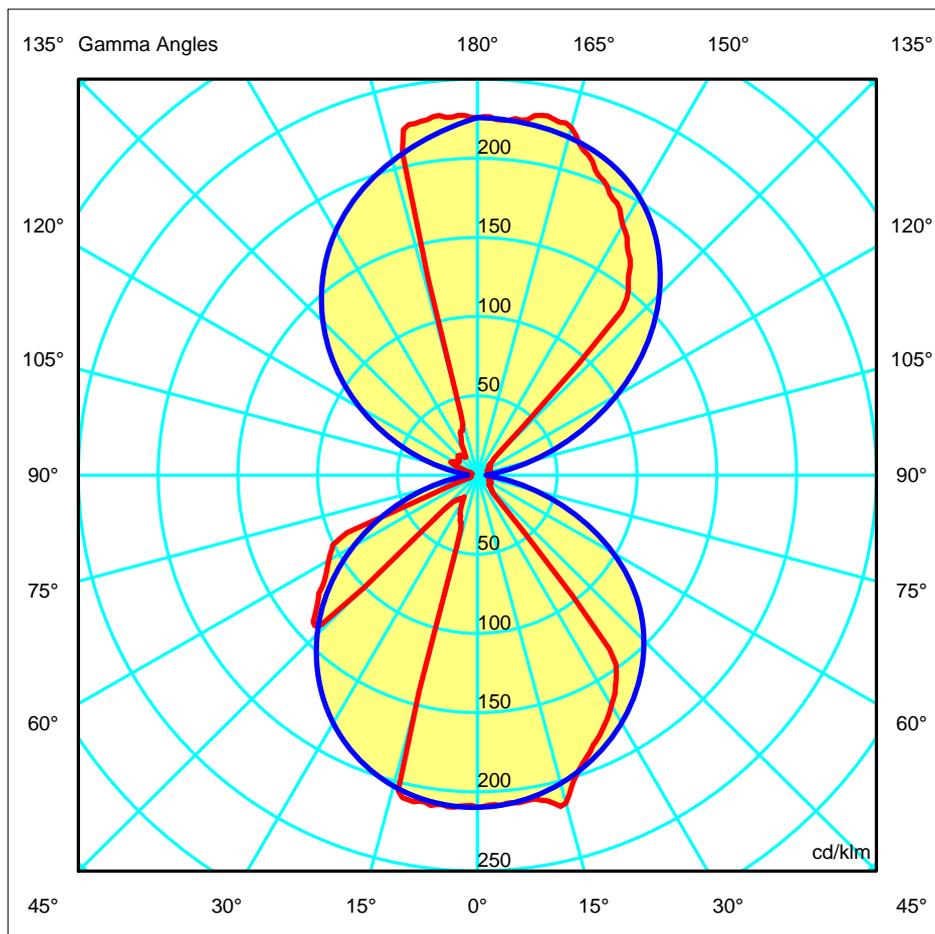

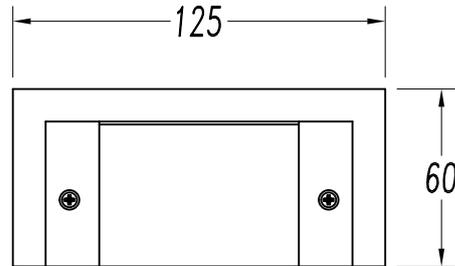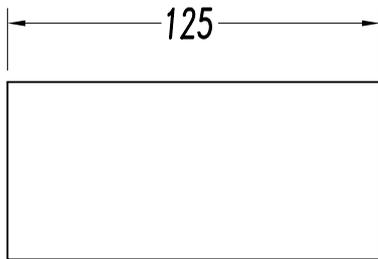

PLASTER/ WHITE

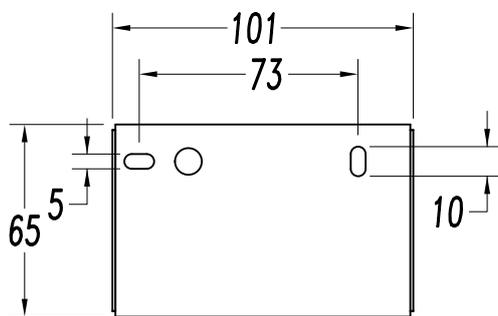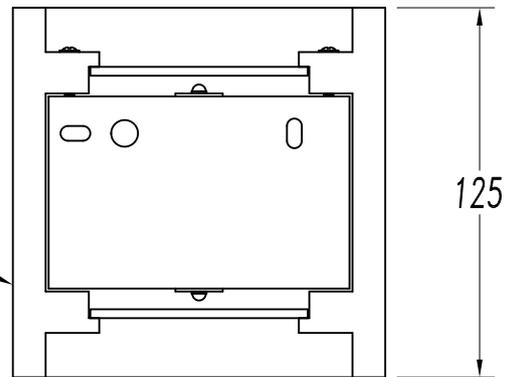

ALUMINIUM/ WHITE

