





The photograph may not match the reference exactly. Please read the product description to identify the finish.

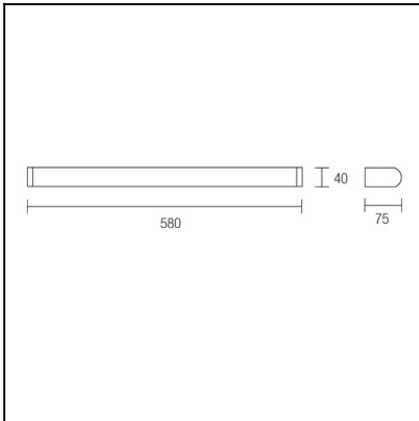

### TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Lampholder:	1 x G5
Power (W):	G5 14
Total power consumption (W):	15
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.82
EAN:	8435111079874,00




### MATERIALS / FINISHES

**Structure material:** Extruded aluminium  
**Structure finish:** Chrome

**Diffuser material:** Polycarbonate  
**Diffuser finish:** Matt opal

### GEAR

Gear included: Yes, electronic




Download photometric file .ldt /.ies

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>		
Code	05-4375-21-M1	Code	448-CR	Code	TL5 HE sup80 14W/840	
Name	Aplique 1x14W T5 difusor opal	Name	Aplique 1x14W T5 difusor opal	Number	1	
Line	Eulumdat	Date	31-03-2009	Position		
Efficiency	43.37%	Coordinate system	CG	Total Flux	1200.00 lm	
Maximum value	83.36 cd	Position	C=0.00 G=60.00	Double Symmetrical		
Rectangular Luminaire	Length	580 mm	Width	38 mm	Height	77 mm
Rectangular Luminous Area	Length	565 mm	Width	36 mm	Height	36 mm
Horizontal Luminous Area	0.020340 m2	Emitting area on Plane 180°		0.020340 m2		
Emitting area on Plane 0°	0.020340 m2	Emitting area on Plane 270°		0.001296 m2		
Emitting area on Plane 90°	0.001296 m2	Glare area at 76°		0.024657 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1200.00 lm		
Operator	Asselum	Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	TL5 HE sup80 14W/840	TL5 HE sup80 14W/840 - 14.00 W	1200.00	14.00	1	
C.I.E.	28 55 79 70 43	D DIN 5040				
F UTE	0.30 J + 0.13 T	B NBN				
		B11				
		BZ 7				

580mm x 38mm



**C Halfplanes**

180.0 — 0.0

270.0 — 90.0

ULOR 12.95 %

DLOR 30.42 %

RN 29.86 %

