





The photograph may not match the reference exactly. Please read the product description to identify the finish.

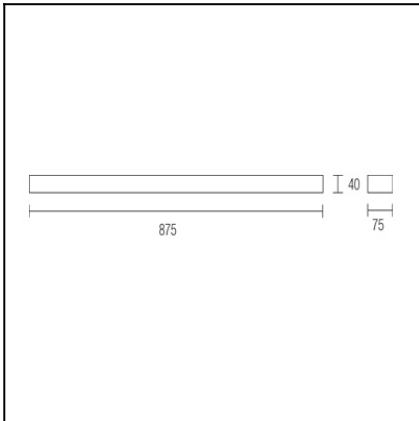

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Lampholder:	1 x G5
Power (W):	G5 21
Bulb included:	1 x G5 21W. Warm white (<3700 K)
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	1.175
EAN:	8435111079843,00




MATERIALS / FINISHES

Structure material: Extruded aluminium
Structure finish: Chrome

Diffuser material: Polycarbonate
Diffuser finish: Matt opal

GEAR

Gear included: Yes, electronic




Download photometric file .ldt /.ies

Luminaire		Measur.		Lamp		
Code	05-4378	Code	05-4378	Code	FLUORESCENT	
Name	WALL LIGHT	Name	WALL LIGHT	Number	1	
Line	TOILET Q	Date	15-11-2013	Position		
Efficiency	61.01%	Coordinate system	CG	Total Flux	1750.00 lm	
Maximum value	179.66 cd	Position	C=180.00 G=49.00	Asymmetrical		
Rectangular Luminaire	Length	880 mm	Width	40 mm	Height	1 mm
Rectangular Luminous Area	Length	880 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.035200 m ²	Emitting area on Plane 180°		0.000000 m ²		
Emitting area on Plane 0°	0.000000 m ²	Emitting area on Plane 270°		0.000000 m ²		
Emitting area on Plane 90°	0.000000 m ²	Glare area at 76°		0.008516 m ²		
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		1750.00 lm		
Operator		Source voltage				
Temperature	25.00 °C	Source current				
Humidity	60.00 %	Photocell				
Notes						

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
IESNA-1995	FLUORESCENT	T5-21W - 23.30 W	1750.00	23.30	1	
C.I.E.	29 57 81 71 61	D DIN 5040		B11		
F UTE	0.43 H + 0.18 T	B NBN		BZ 7		

880mm x 40mm

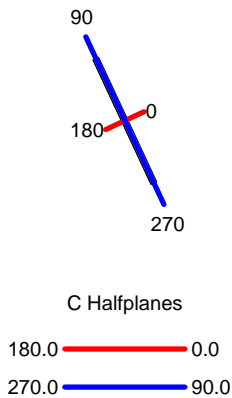

ULOR 17.70 %
DLOR 43.31 %
RN 29.01 %

