



Design by Nahtrang Design

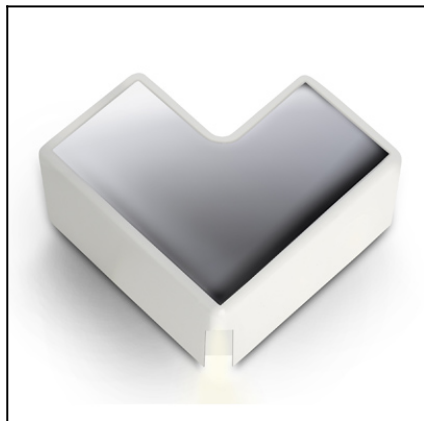

The photograph may not match the reference exactly. Please read the product description to identify the finish.

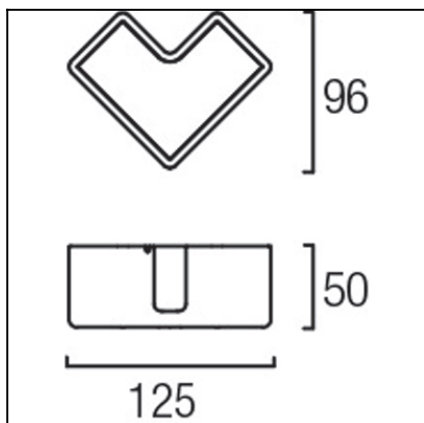

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP20
Bulb:	2 x LED Samsung. Warm white (<3700 K)
Power (W):	2x4W
Total power consumption (W):	8
Luminous efficacy (Lm/W):	45
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	10
Net Weight (Kg):	0.425
EAN:	8435111091548,00



MATERIALS / FINISHES


Structure material:	Aluminium Steel	Diffuser material:	Methacrylate
Structure finish:	Matt white Chrome	Diffuser finish:	Transparent

Download photometric file .ldt /.ies

Luminaire			Measurem.			Lamp		
Code	05-4720-BW-BW		Code	05-0047-BW-BW		Code	05-0047-BW-BW	
Name	Aplique LOW leds 2x4W		Name	Aplique leds LOW 2x4W		Number	1	
Line	- LEDS C4 LEDS		Date	18-03-2013		Position	Universal	
Efficiency			100.00%	Coordinate system	CG	Total Flux	400.23 lm	
Maximum value			106.66 cd	Position	C=90.00 G=10.00	Asymmetrical		
Rectangular Luminaire			Length	50 mm	Width	125 mm	Height	96 mm
Rectangular Luminous Area			Length	25 mm	Width	30 mm	Height	96 mm
Horizontal Luminous Area			0.000750 m2		Emitting area on Plane 180°		0.002400 m2	
Emitting area on Plane 0°			0.002400 m2		Emitting area on Plane 270°		0.002880 m2	
Emitting area on Plane 90°			0.002880 m2		Glare area at 76°		0.002510 m2	
Symmetry Type			Asymmetrical		Maximum Gamma Angle		180	
Measurement Distance			6.44		Measurement Flux		400.23 lm	
Operator			Asselum T2		Source voltage		230.00 V	
Temperature			20.00 °C		Source current			
Humidity			48.00 %		Photocell		PRC	
Notes								

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
- LEDS C4 LEDS	05-0047-BW-BW	Lámpara led blanco cálido 8W	400.23	8.00	1
C.I.E.	62 83 95 50 100	D DIN 5040	C51		
F UTE	0.50 C + 0.50 T	B NBN	BZ 3 / 4 / BZ 4		


50mm x 125mm




C Halfplanes

180.0 — 0.0
270.0 — 90.0


ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

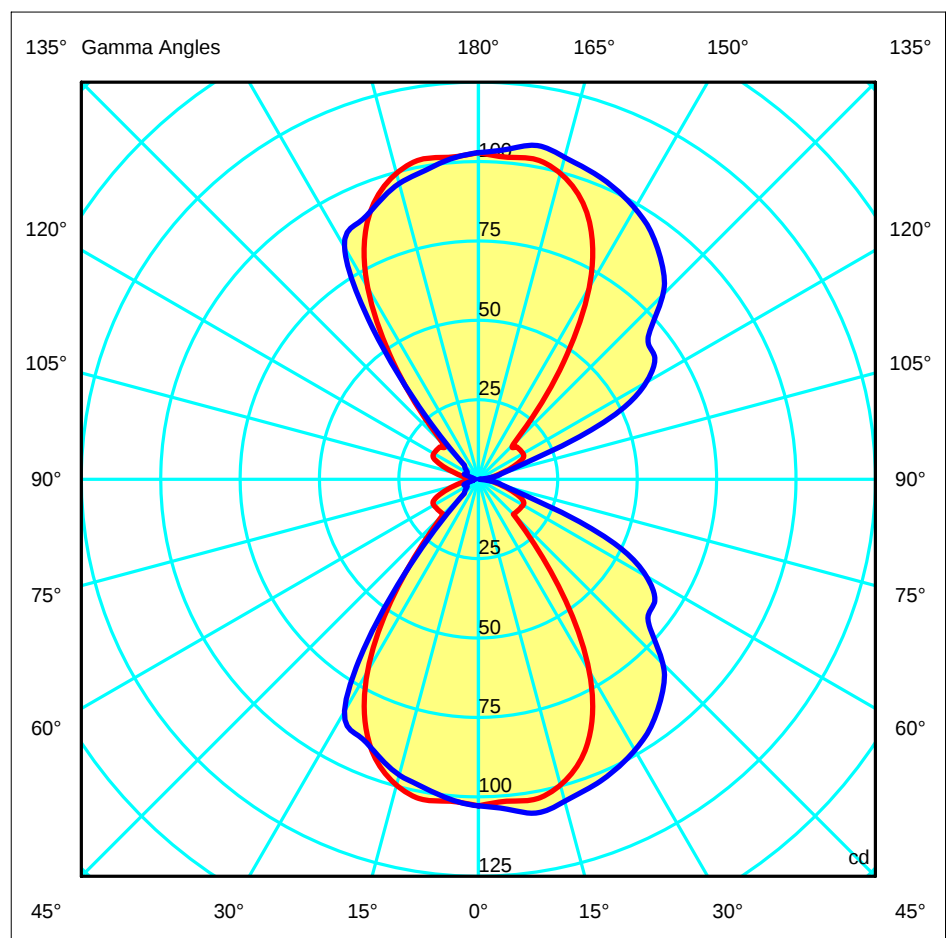

steel (matt white/chrome) /
acero (mate blanco/cromado)

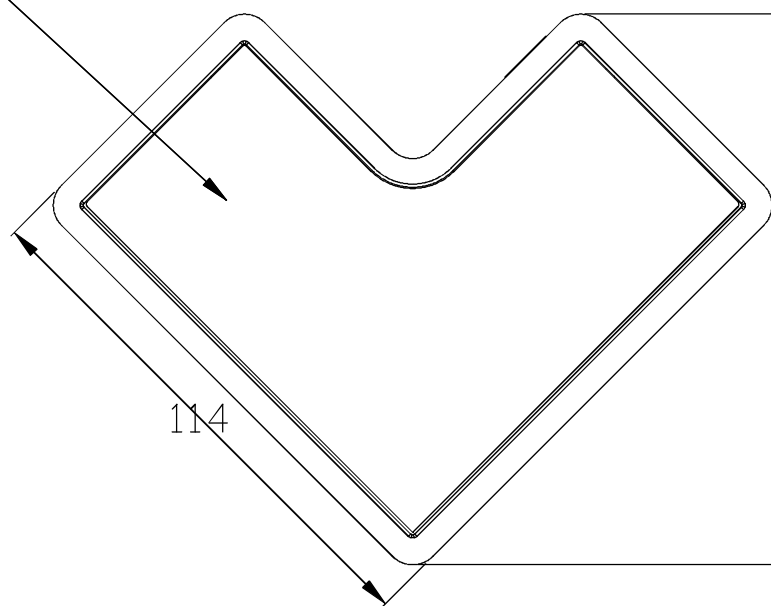


Aluminum
(matt white) /
Aluminio
(mate blanco)

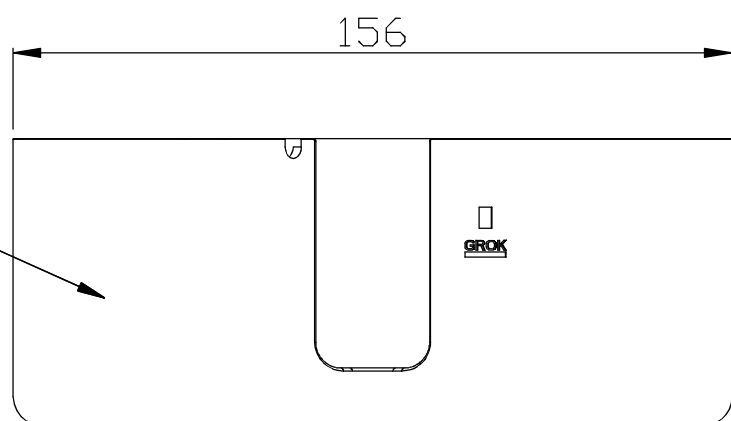


acrylic (transparent) /
acrílico (transparente)




1

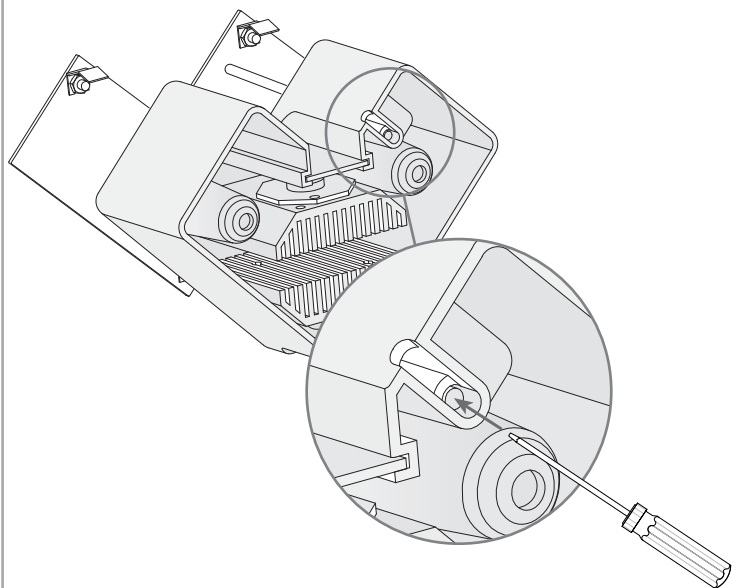


2

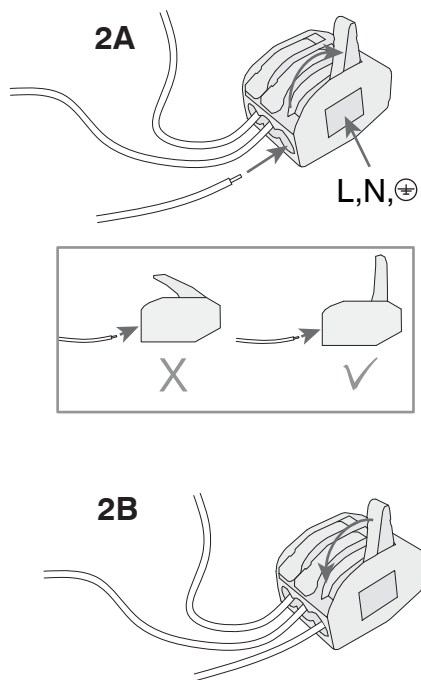


3

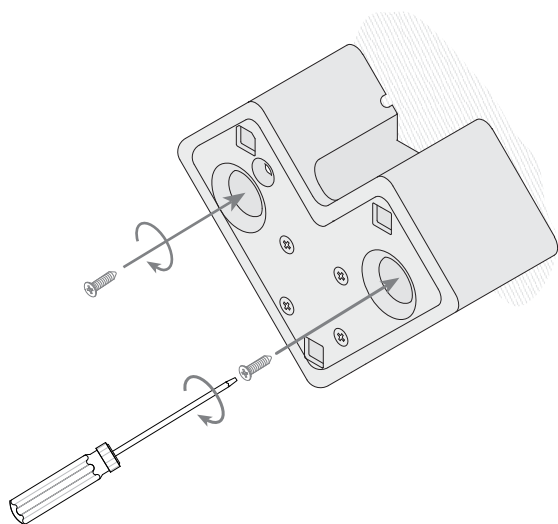

5

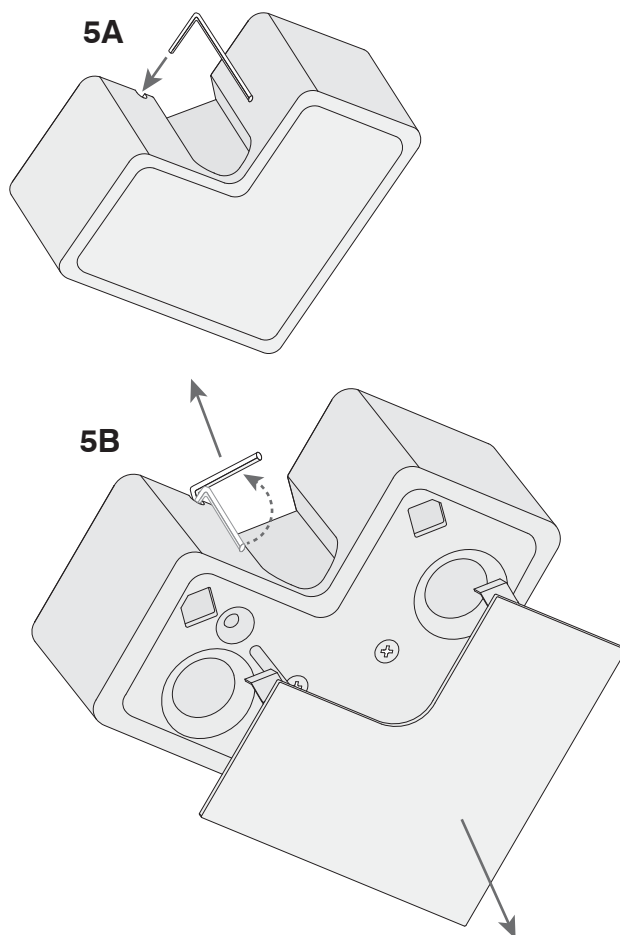

4

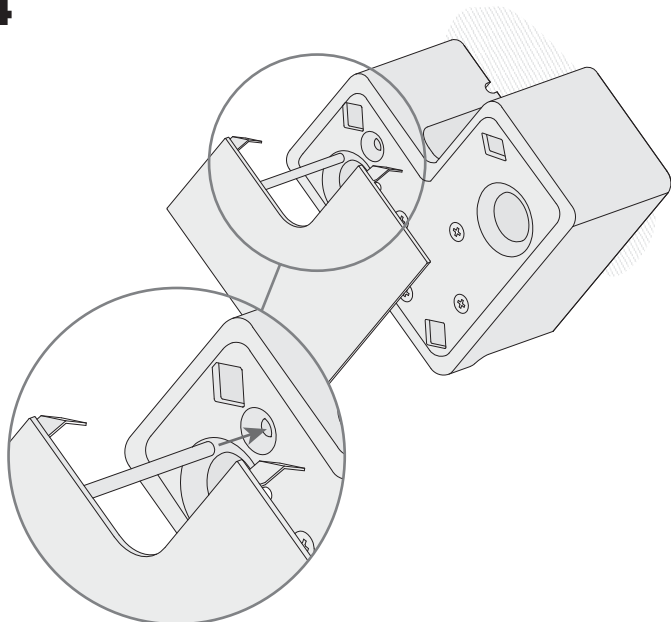

6

