


OUT 

SELENE

05-9234-18-37




The photograph may not match the reference exactly. Please read the product description to identify the finish.

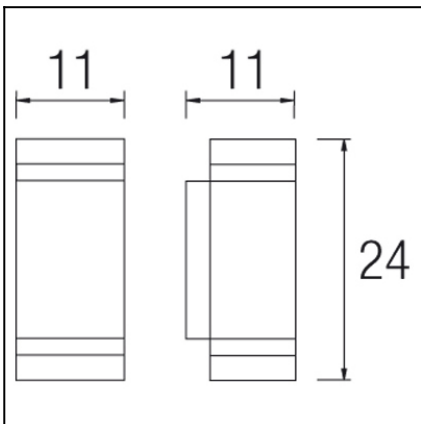

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP54
Lampholder:	2 x GU10 2 x GU10 2 x GU10
Power (W):	GU10 50 W GU10 14 W Fluorescent GU10 5 W LED
Bulb included:	2 x GU10 50 W 2 x GU10 2 x GU10
Total power consumption (W):	100
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	4
Net Weight (Kg):	1.07
EAN:	8435111049822




MATERIALS / FINISHES

Structure material: Injected aluminium


Diffuser material: Glass
Methacrylate

Structure finish: Oxide brown

Diffuser finish: Transparent
Transparent

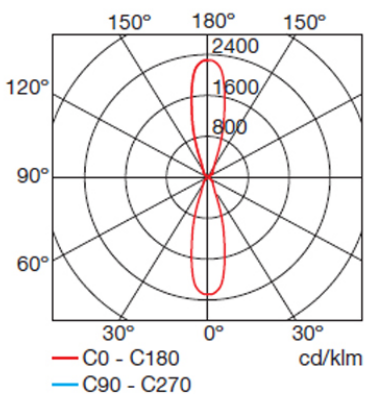


Download photometric file .ldt /.ies

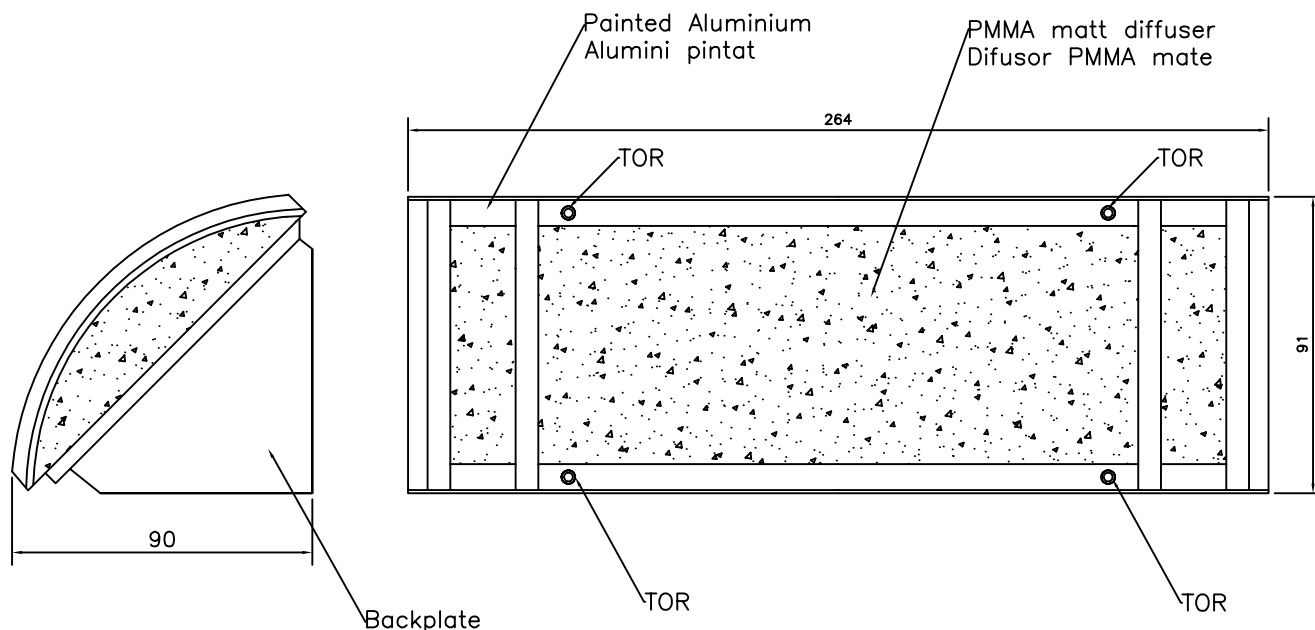


Installation

- 1.-Unscrew the 4 screws marked as "TOR"
- 2.-Take out the frame with the PMMA diffuser
- 3.-Fix the backplate into the wall doing the below holes:

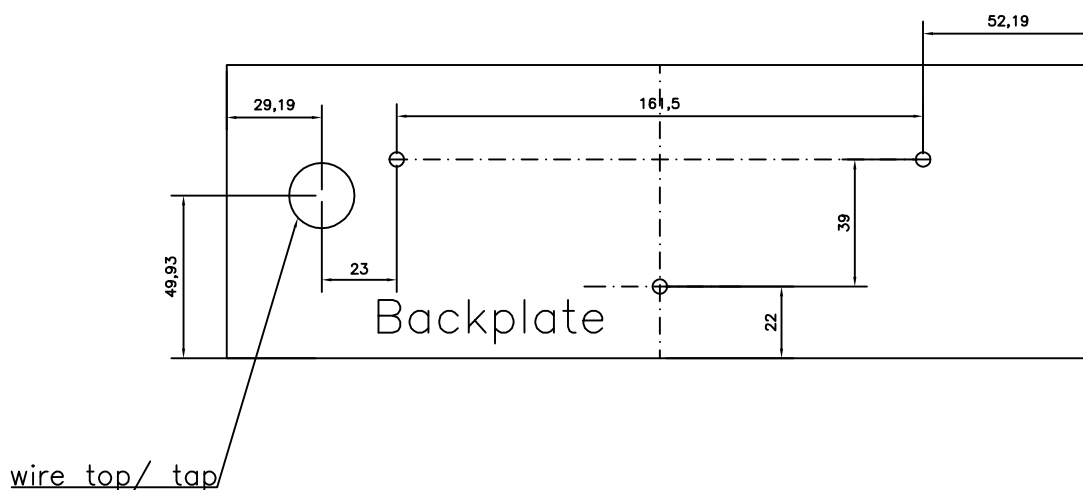

© Leds C-4. All rights reserved. Copying and / or reproduction prohibited without duly authorization of LEDS-C4.

© Leds C-4. Todos los derechos reservados. Se prohíbe su utilización o reproducción total o parcial sin permiso por escrito de LEDS C4.

Tolerancias generales BASTO DIN-7168		Proyecto:		CRITERIOS DE CONTROL		 LED S-C4
Fecha		Nombre		Inspección Dimensional	0	
Dibujado		J.PARÉS		Inspección Visual	0	
Comprob.		Escala		Denominación 05-8783		

