




The photograph may not match the reference exactly. Please read the product description to identify the finish.

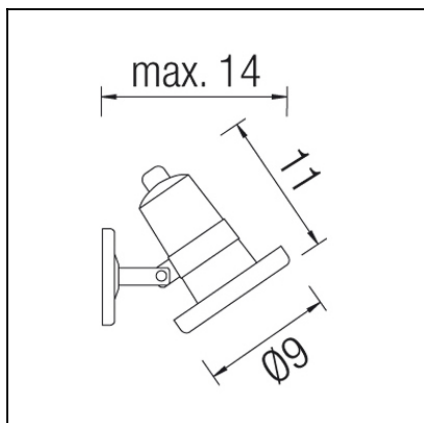

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
Adjustable $\pm 45^\circ$ on the horizontal axis.	
Adjustable 360° on the vertical axis.	
IP Protection degrees:	IP68 (1m)
IK Protection degrees:	IK08
Lampholder:	1 x GU5.3
Power (W):	GU5.3 Max. 50W
Total power consumption (W):	50
Voltage / Frequency:	12VAC
Warranty (Years):	2
Units per box:	12
Net Weight (Kg):	0.36
EAN:	8435381408855




MATERIALS / FINISHES

Structure material: Stainless steel AISI316
Structure finish: Polished

Diffuser material: Glass
Diffuser finish: Tempered

GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

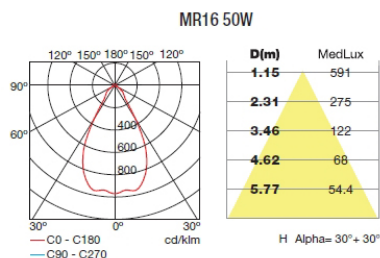

Download photometric file .ldt /.ies

71-9197-05-05




IP68 (1m)

Luminaire			Measurem.			Lamp	
Code	05-9245-CA-37		Code	05-9245-CA-37		Code	QR-CB 50W 60D
Name	AQUA		Name	AQUA		Number	1
Line	Eulumdat		Date	29-04-1994		Position	
Efficiency		99.98%	Coordinate system		CG	Total Flux	1474.00 lm
Maximum value		1429.78 cd	Position		C=0.00 G=0.00	Rotosymmetrical	
Rectangular Luminaire		Length	122 mm	Width	90 mm	Height	190 mm
Rectangular Luminous Area		Length	50 mm	Width	50 mm	Height	0 mm
Horizontal Luminous Area		0.002500 m2	Emitting area on Plane 180°			0.000000 m2	
Emitting area on Plane 0°		0.000000 m2	Emitting area on Plane 270°			0.000000 m2	
Emitting area on Plane 90°		0.000000 m2	Glare area at 76°			0.000605 m2	
Symmetry Type		Rotosymmetrical	Maximum Gamma Angle			180	
Measurement Distance		0.00	Measurement Flux			1474.00 lm	
Operator		25.00 °C			Source voltage		
Temperature		60.00 %			Source current		
Humidity					Photocell		
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumat	QR-CB 50W 60D	QR-CB 50W 60D - 50.00 W	1474.00	50.00	1	
C.I.E.	81 94 97 100 100	D DIN 5040	A60			
F UTE	1.00 B	B NBN	BZ 1 / 4 / BZ 2			


122mm x 90mm




C Halfplanes


180.0 — 0.0

ULOR 0.00 %
DLOR 99.97 %
RN 0.00 %

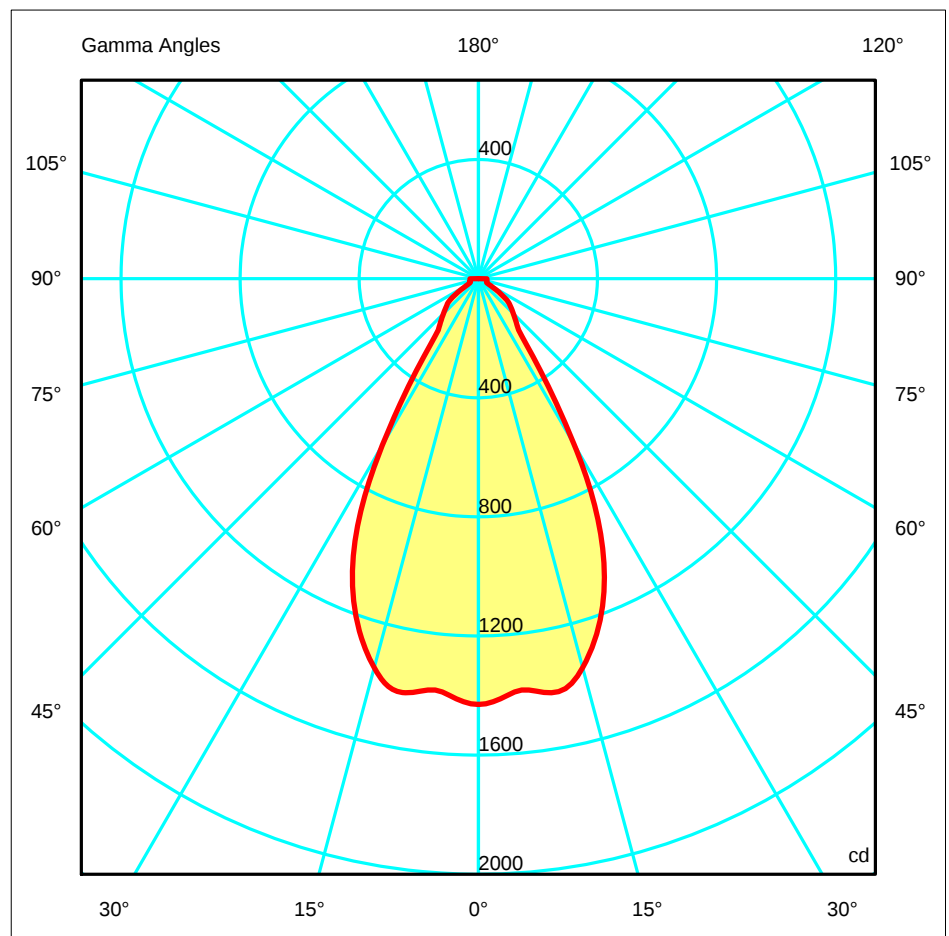


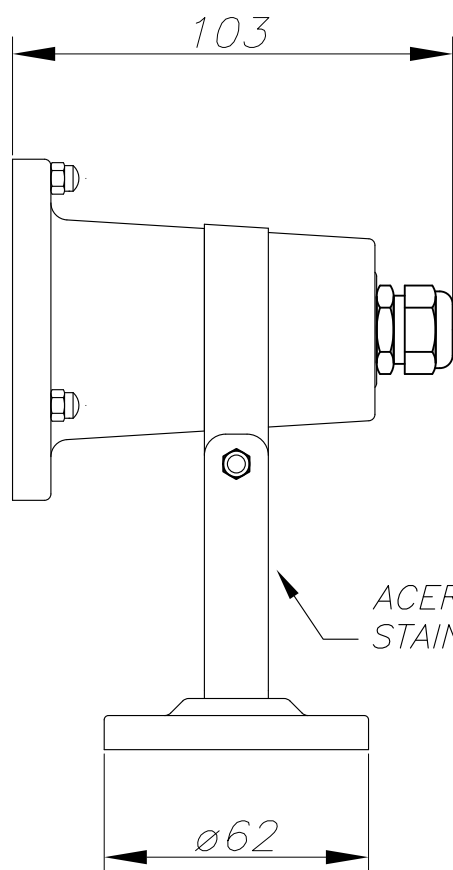


Cristal templado
Hardened glass

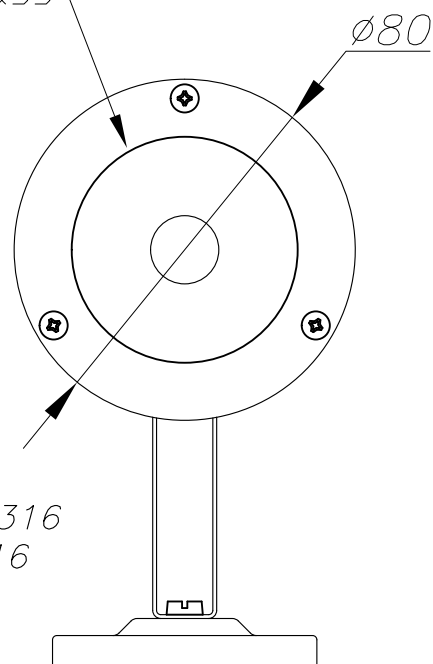


ACERO INOXIDABLE AISI-316
STAINLESS STEEL AISI-316

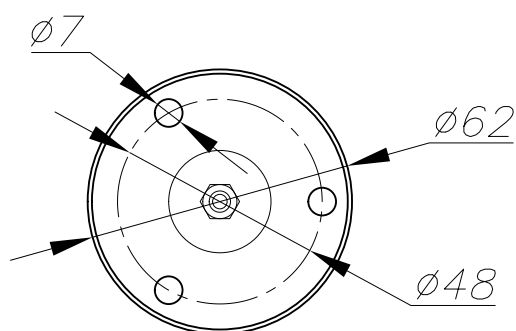


PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

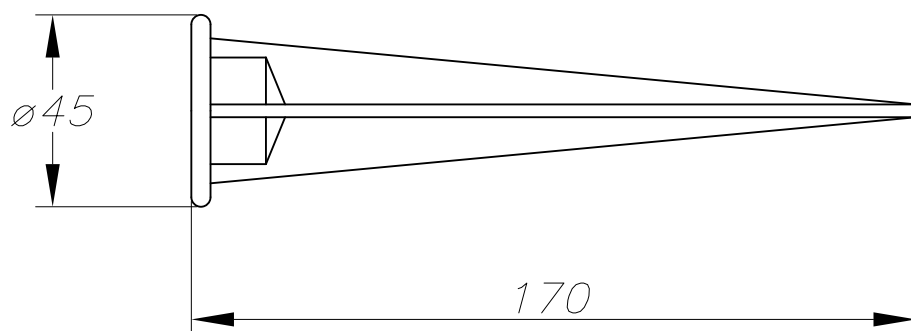


①

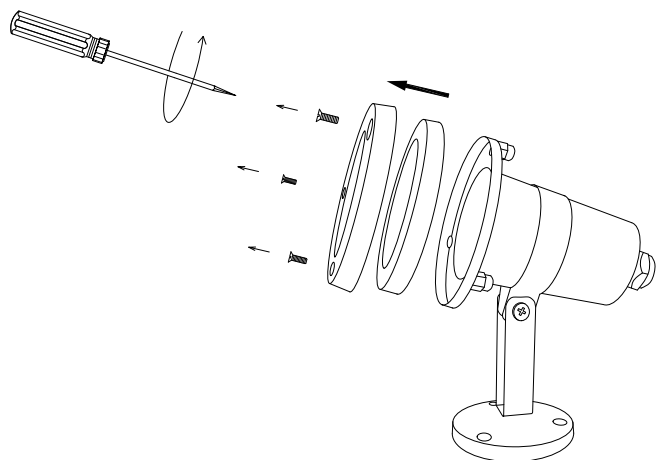


②

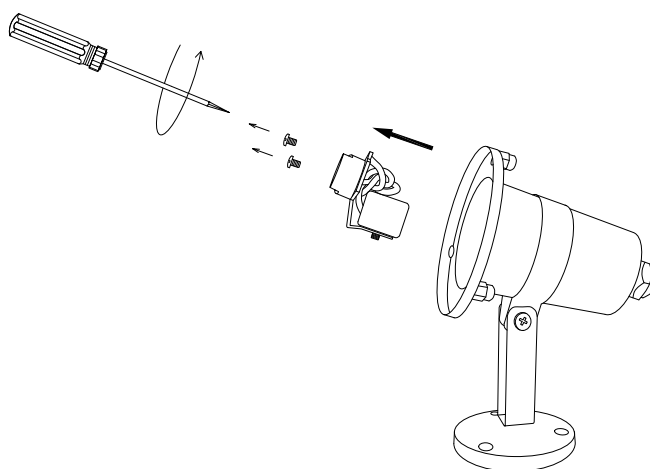


③

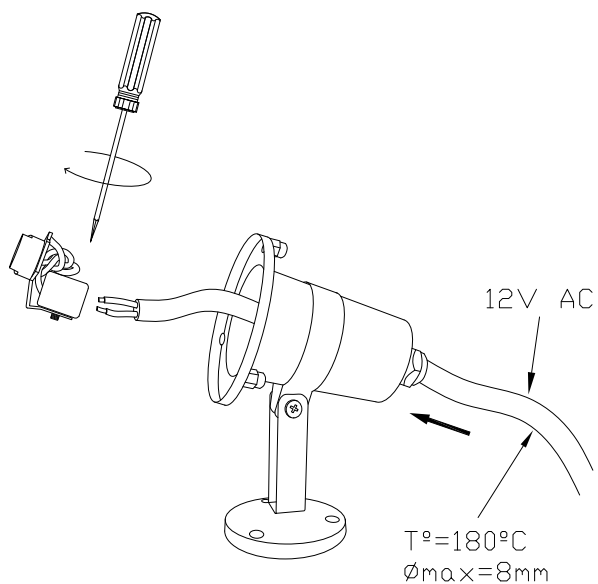

④

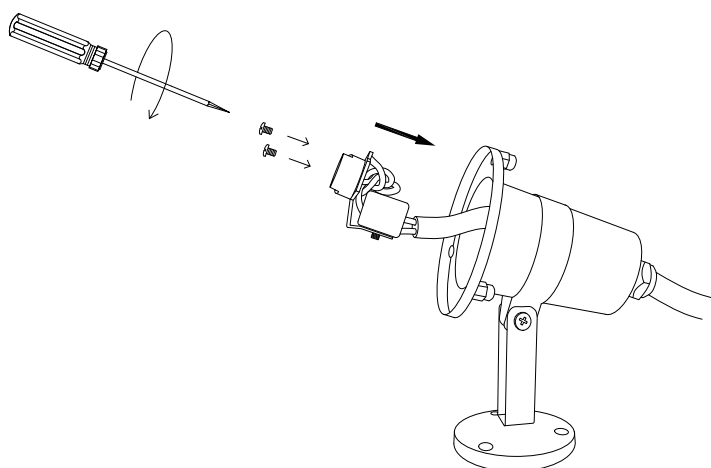

⑤

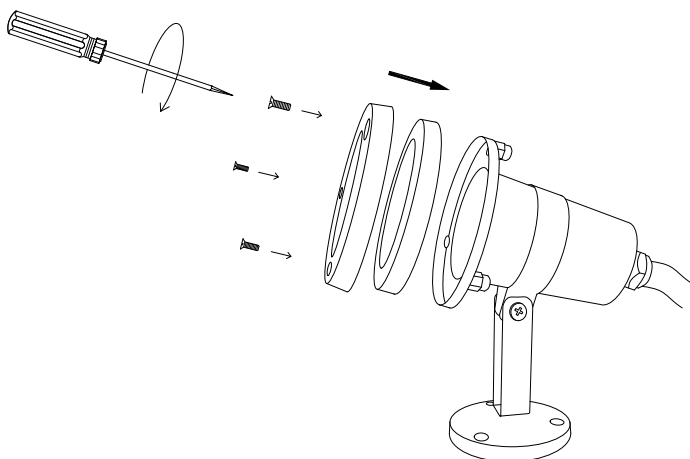

⑥

