




The photograph may not match the reference exactly. Please read the product description to identify the finish.

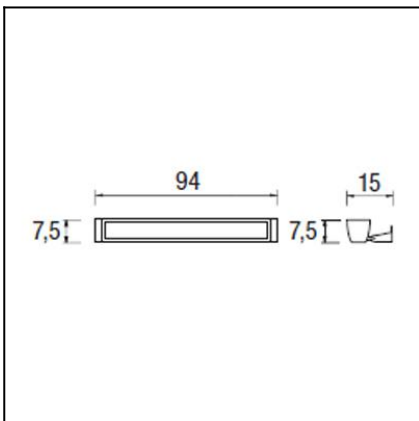


DESCRIPTION

Surface mountable light with extruded aluminium body and clear glass diffuser. Different sizes available depending on the wattage. Compact fluorescent light source using a T5 22W bulb (not supplied). Includes BAG electronic control components. Finished in dark grey. May be rotated by +45°/-90°. Its wire outlets on both sides makes it suitable for an array installation.

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
Adjustable +45° / -90° on the horizontal axis.	
IP Protection degrees:	IP65
IK Protection degrees:	IK07
Lampholder:	1 x G5
Power (W):	G5 39W
Voltage / Frequency:	230V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	3.23
EAN:	8435111049624




MATERIALS / FINISHES

Structure material: Extruded aluminium

Diffuser material: Glass

Structure finish: Urban grey

Diffuser finish: Tempered

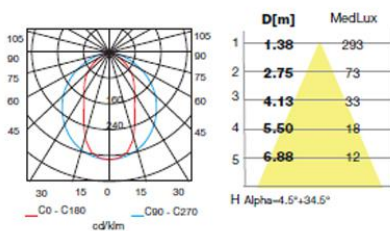

Download photometric file .ldt / .ies


GEAR

Gear included: Yes, electronic


Luminaria		Ensayo		Lámpara	
Código	05-9265-Z5-37	Código	05-9266-Z5-37	Código	TL5 HO sup80 39W/830
Nombre	Luminaria 1x39W T5	Nombre	Luminaria IP-65 T5 1x54W	Número	1
Familia	- LEDS-C4	Fecha	12-11-2008	Posición	Universal
Eficiencia	52.69%	Sist. de Coord.	C-G	Flujo Total	3100.00 lm
Valor Máximo	276.40 cd/klm	Posición	C=0.00 G=0.00	Bisimétrico	


935mm x 75mm

Semiplanos C

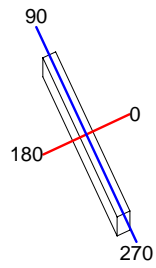


180.0 ——— 0.0
270.0 ——— 90.0

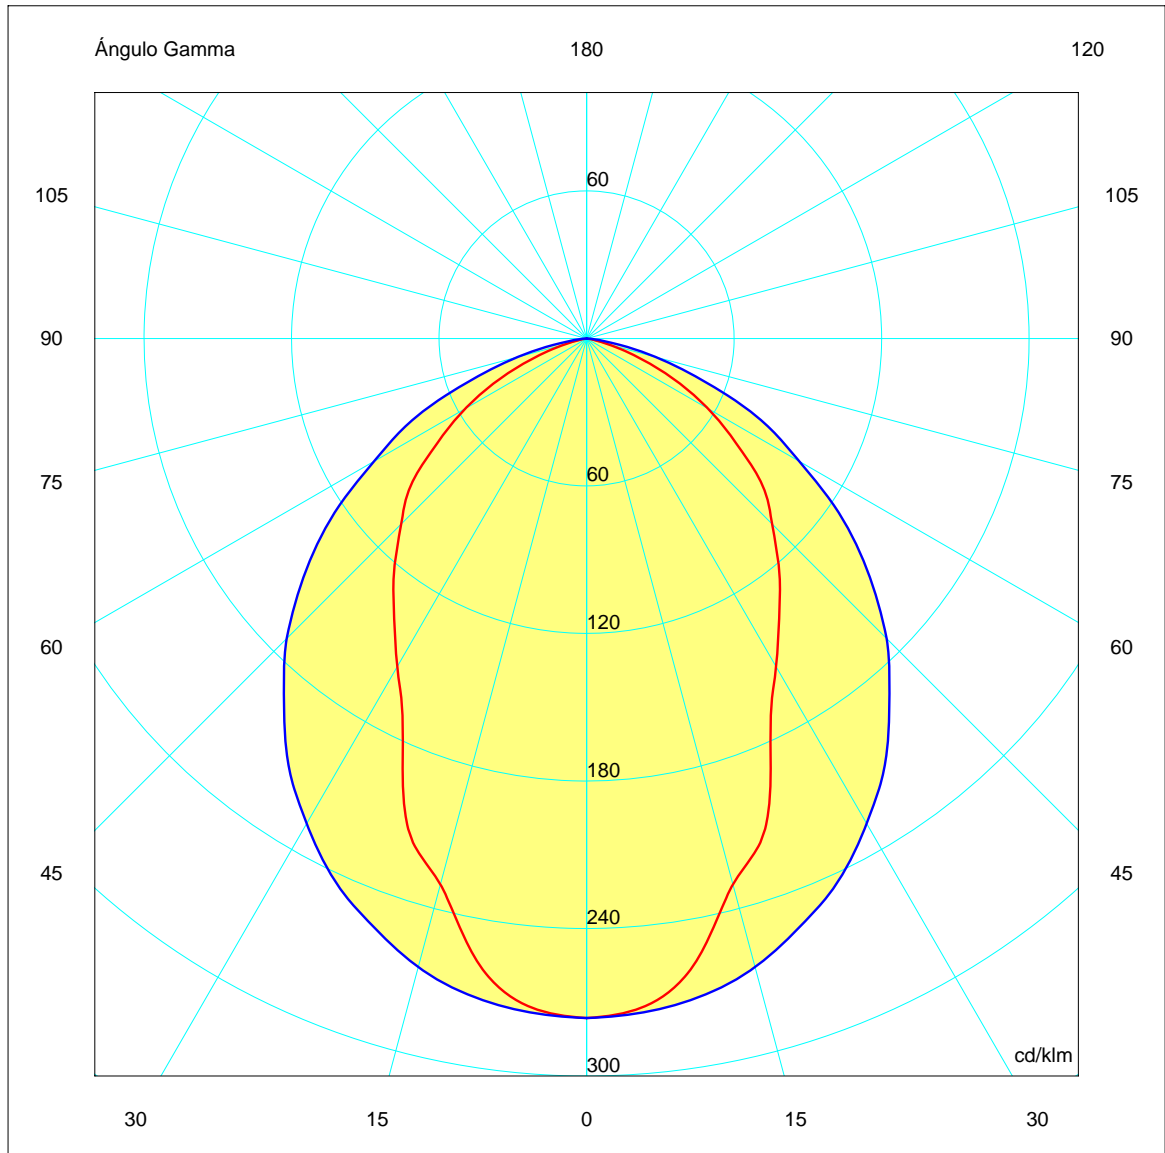

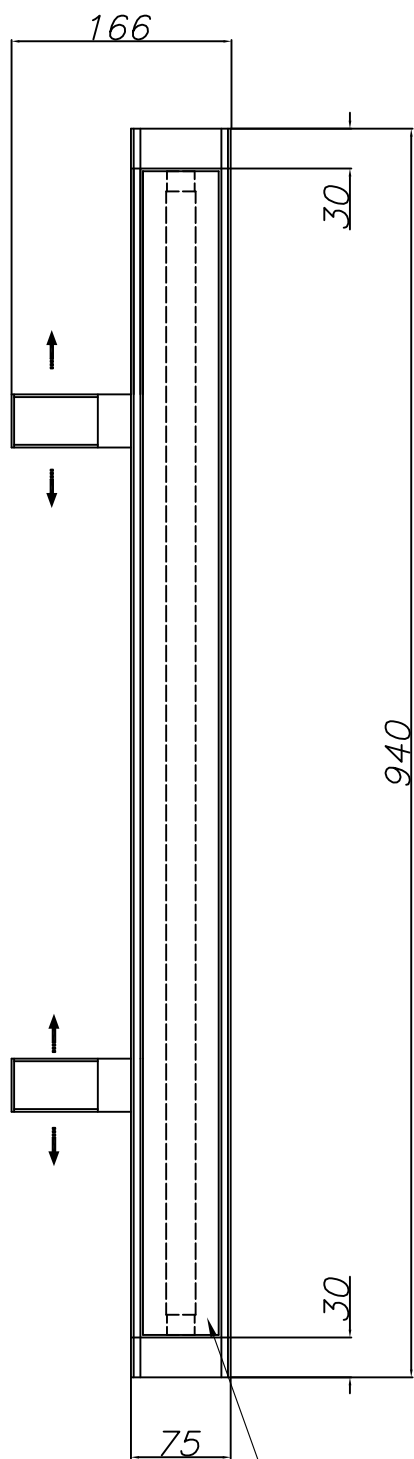


CRISTAL TRANSPARENTE
TRANSPARENT GLASS

Detalle placa fijación:
Detail fixation for the plate:

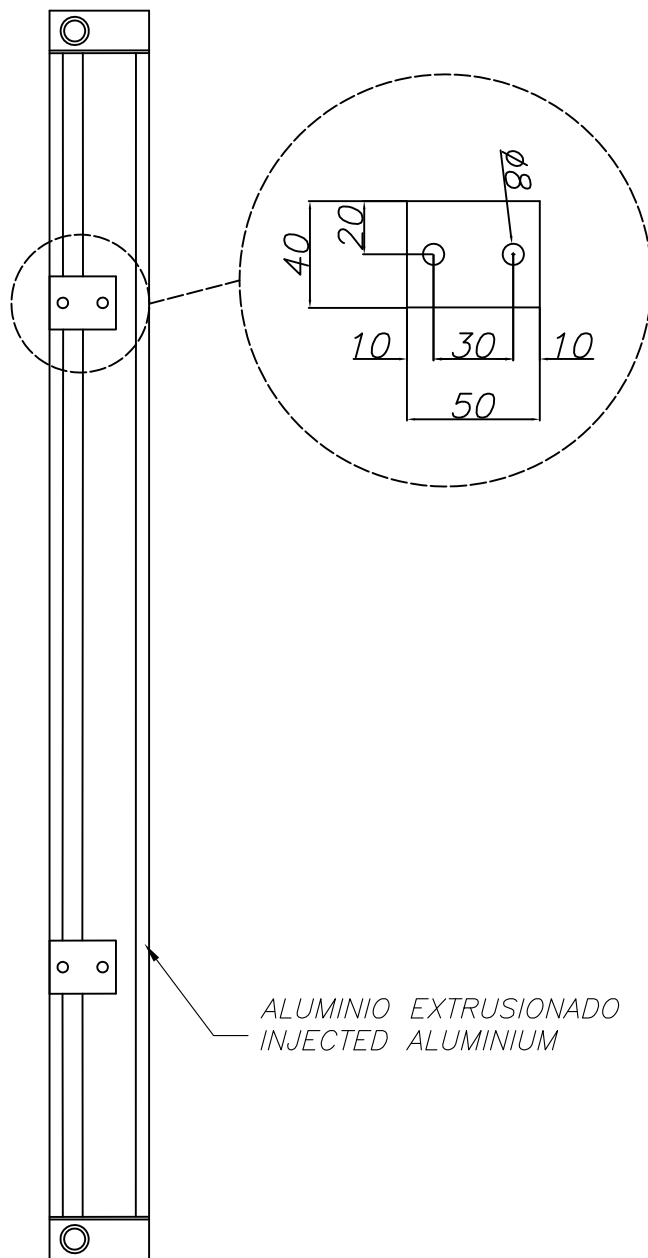

ALUMINIO EXTRUSIONADO
INJECTED ALUMINIUM





LED5-C4

OUTDOOR

05-9264
05-9265
05-9266

