




The photograph may not match the reference exactly. Please read the product description to identify the finish.

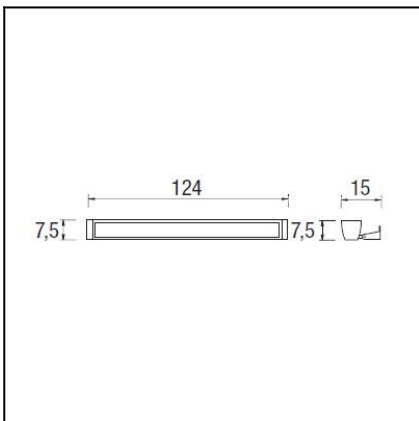


### DESCRIPTION

Surface mountable light with extruded aluminium body and clear glass diffuser. Different sizes available depending on the wattage. Compact fluorescent light source using a T5 22W bulb (not supplied). Includes BAG electronic control components. Finished in dark grey. May be rotated by +45°/-90°. Its wire outlets on both sides makes it suitable for an array installation.

### TECHNICAL CHARACTERISTICS

Type:	Wall fixture
Adjustable +45° / -90° on the horizontal axis.	
IP Protection degrees:	IP65
IK Protection degrees:	IK07
Lampholder:	1 x G5
Power (W):	G5 54W
Voltage / Frequency:	230V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	4.035
EAN:	8435111049600




### MATERIALS / FINISHES

**Structure material:** Extruded aluminium

**Diffuser material:** Glass

**Structure finish:** Urban grey

**Diffuser finish:** Tempered

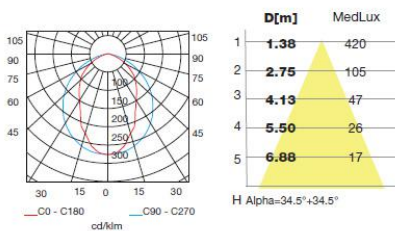


Download photometric file .ldt / .ies


<b>Luminaria</b>		<b>Ensayo</b>		<b>Lámpara</b>	
Código	05-9266-Z5-37	Código	05-9266-Z5-37	Código	TL5 HO sup80 54W/840
Nombre	Luminaria 1x54W T5	Nombre	Luminaria IP-65 T5 1x54W	Número	1
Familia	- LEDS-C4	Fecha	12-11-2008	Posición	Universal
Eficiencia	52.69%	Sist. de Coord.	C-G	Flujo Total	4450.00 lm
Valor Máximo	276.40 cd/klm	Posición	C=0.00 G=0.00		Bisimétrico


1235mm x 75mm

Semiplanos C




180.0 ——— 0.0  
270.0 ——— 90.0

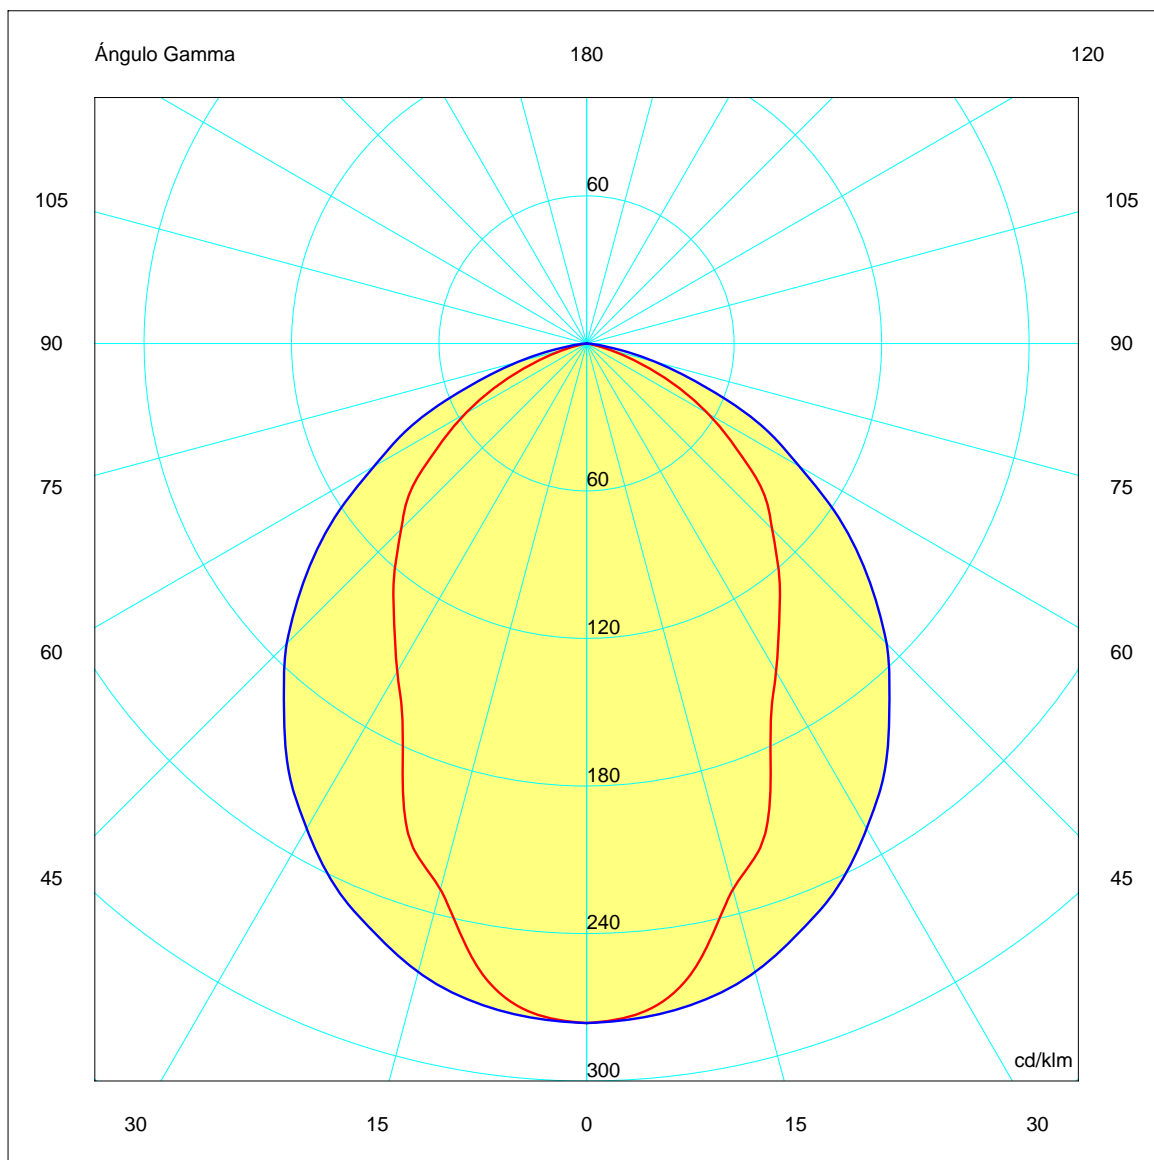

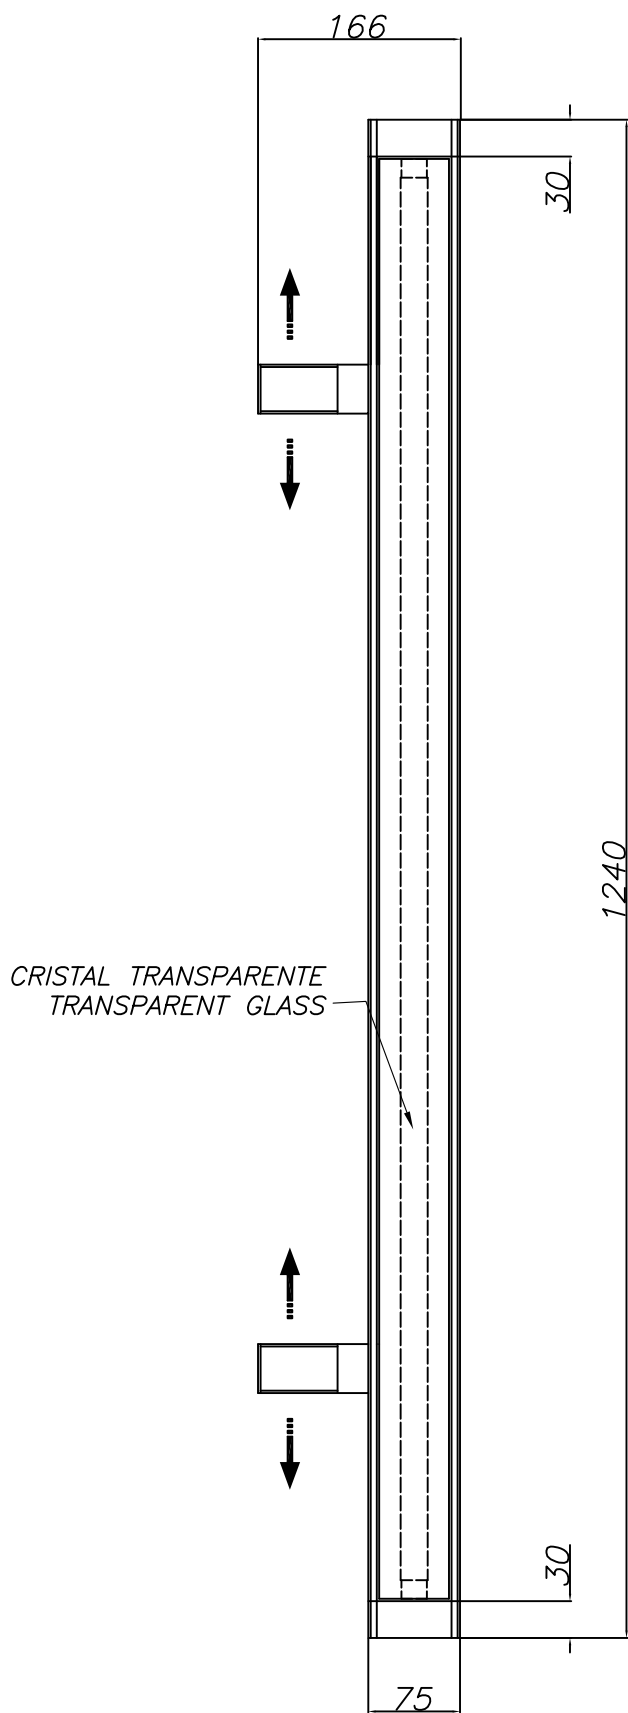

Detalle placa fijación:  
Detail fixation for the plate:

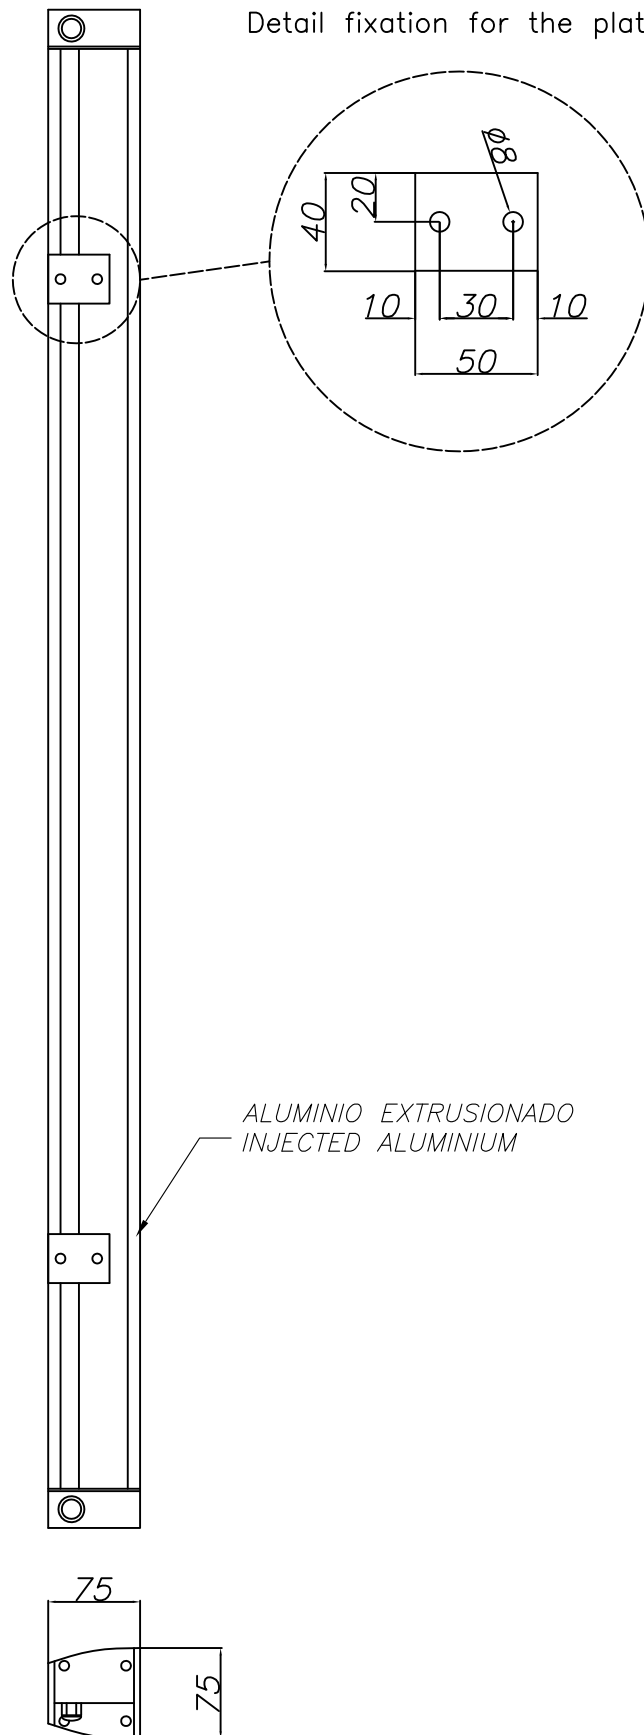



LEDS-C4

# OUTDOOR

05-9264  
05-9265  
05-9266

