





The photograph may not match the reference exactly. Please read the product description to identify the finish.

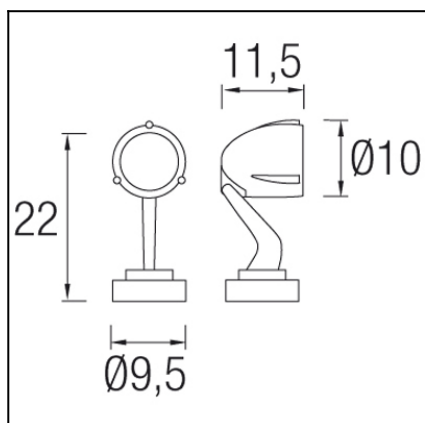


TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable +180° / -15° on the horizontal axis.	
Adjustable 360° on the vertical axis.	
IP Protection degrees:	IP65
IK Protection degrees:	IK05
Lampholder:	1 x GU10
Power (W):	GU10 Max.50W
Total power consumption (W):	50
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.575
EAN:	8435111061992




MATERIALS / FINISHES


Structure material:	High purity aluminium	Diffuser material:	Glass
Structure finish:	Grey	Diffuser finish:	Transparent

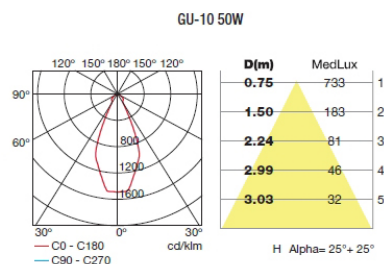



Download photometric file .ldt /.ies

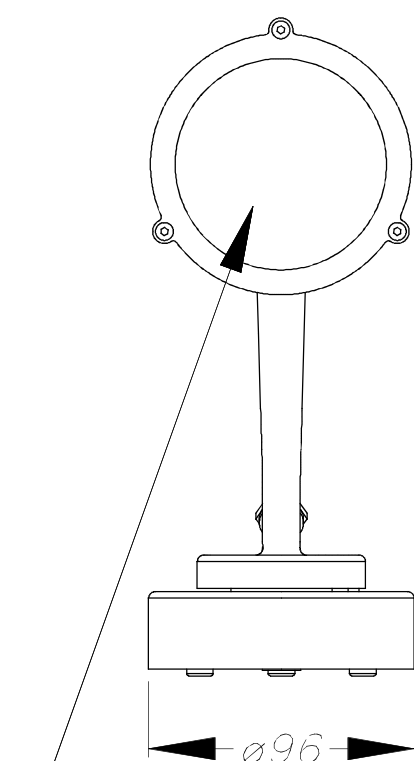

CRISTAL TRANSPARENTE
TRANSPARENT GLASS

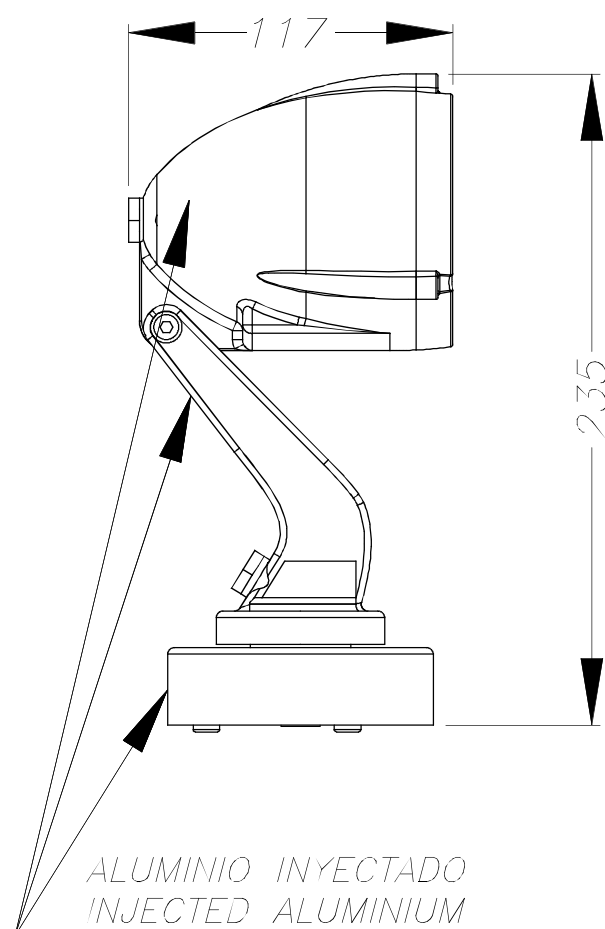

ALUMINIO INYECTADO
INJECTED ALUMINIUM

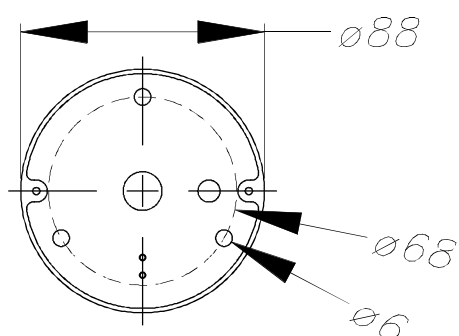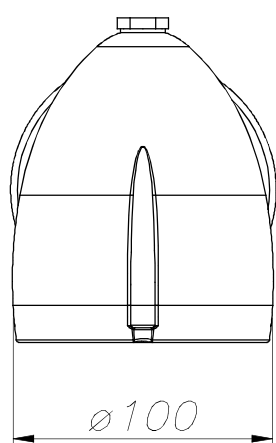


PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE



LED S-C4

OUTD

①

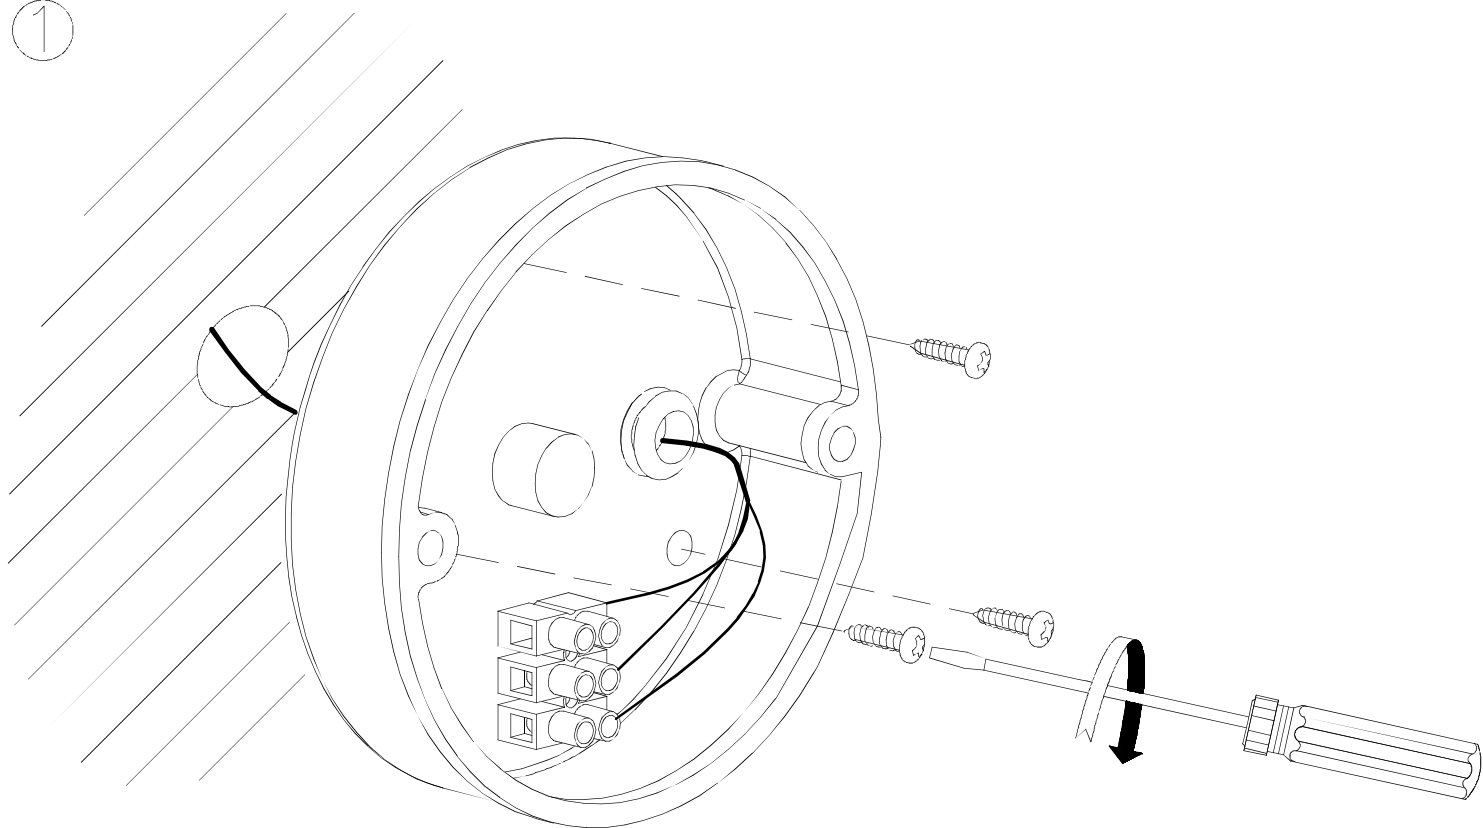

③

