




The photograph may not match the reference exactly. Please read the product description to identify the finish.

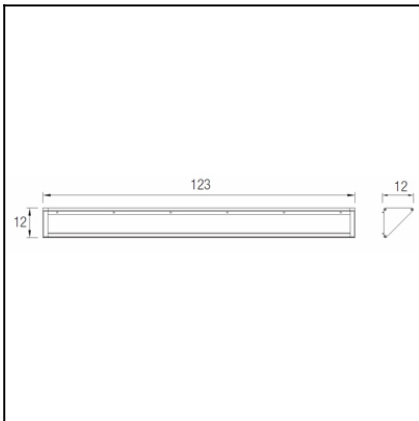

DESCRIPTION

Triangular shaped appliqué for general direct lighting applications. Extruded aluminium body and frosted polycarbonate diffuser. Available in a light grey finish. Light source uses a T5 28W fluorescent lamp (not supplied). Includes BAG electronic control components. Its design and wire outlets on both sides makes it particularly suitable for an array installation. Its high IP and IK rating (IP65, IK10) and its tough weatherproof material make it extremely resistant even under the most severe weather conditions.

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP65
IK Protection degrees:	IK10
Lampholder:	1 x G5
Power (W):	G5 28/54W
Total power consumption (W):	63.1
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	5.93
EAN:	8435381400187



Download photometric file .ldt /.ies

MATERIALS / FINISHES

Structure material:	Extruded aluminium Injected aluminium	Diffuser material:	Polycarbonate
Structure finish:	Grey Grey		


GEAR

Gear included: Yes, electronic

Luminaire		Measurem.		Lamp		
Code	05-9662-34-CD	Code	05-9662-34-CD	Code	TL5 HE sup80 28W/840	
Name	Aplique CURIE 28W T5	Name	Aplique CURIE 28W T5 opal	Number	1	
Line	- LEDS-C4	Date	02-04-2013	Position	Universal	
Efficiency	63.93%	Coordinate system	CG	Total Flux	2600.00 lm	
Maximum value	633.62 cd	Position	C=90.00 G=45.00	Sym. on planes 270-90		
Rectangular Luminaire	Length	160 mm	Width	1230 mm	Height	90 mm
Rectangular Luminous Area	Length	105 mm	Width	1190 mm	Height	0 mm
Horizontal Luminous Area	0.124950 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.030228 m2		
Symmetry Type	Sym. on planes 270-90	Maximum Gamma Angle		180		
Measurement Distance	6.44	Measurement Flux		2600.00 lm		
Operator	Asselum T2	Source voltage		230.00 V		
Temperature	20.00 °C	Source current				
Humidity	53.00 %	Photocell		PRC		
Notes						


Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
PHILIPS 2005 ILCOS FD,FC	TL5 HE sup80 28W/840	MASTER TL5 HE super80 28W/840	2600.00	28.00	1	
C.I.E.	36 64 85 87 64	D DIN 5040	B21			
F UTE	0.56 H + 0.08 T	B NBN	BZ 6			



160mm x 1230mm



C Halfplanes
 270.0 — 0.0
 180.0 — 90.0



ULOR 8.07 %
 DLOR 55.86 %
 RN 12.62 %

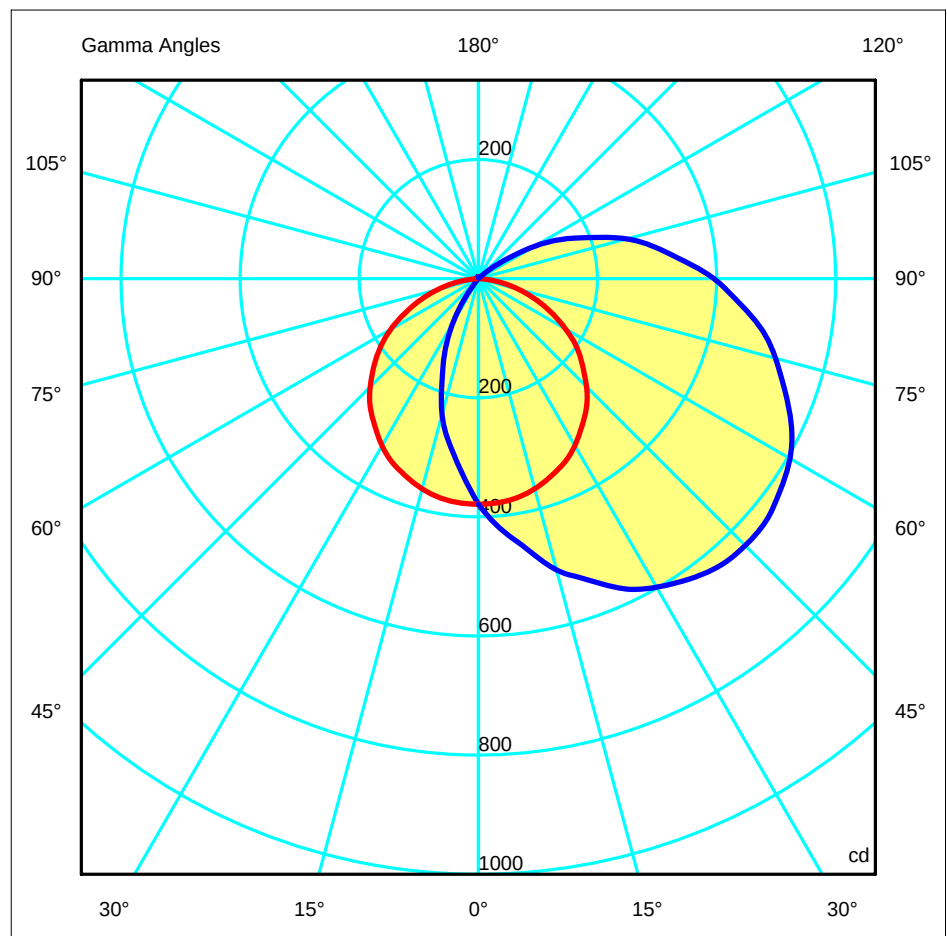

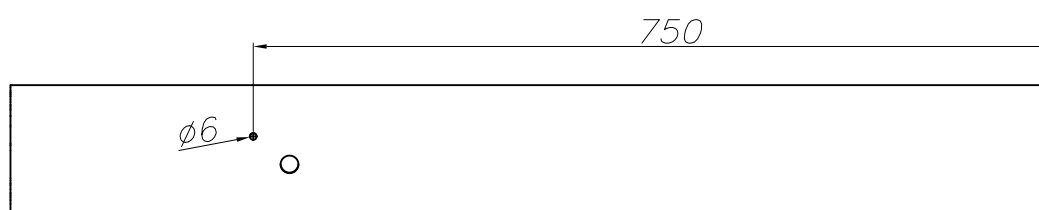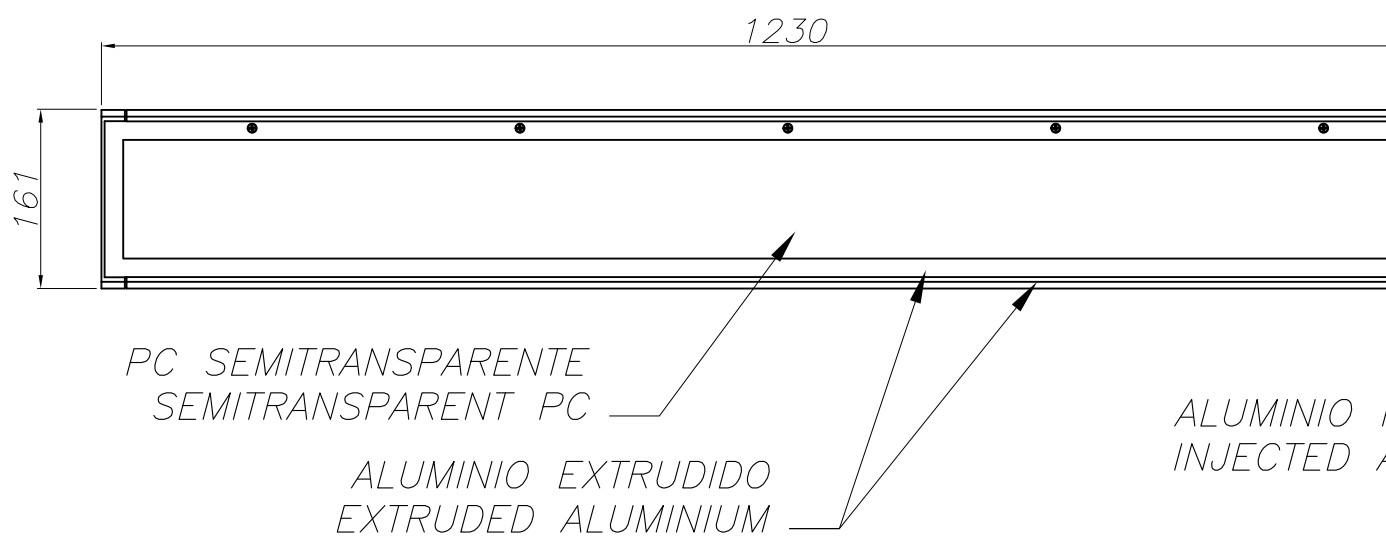


PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE


①

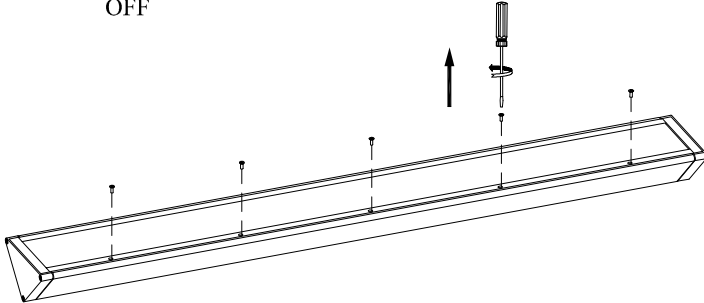


②

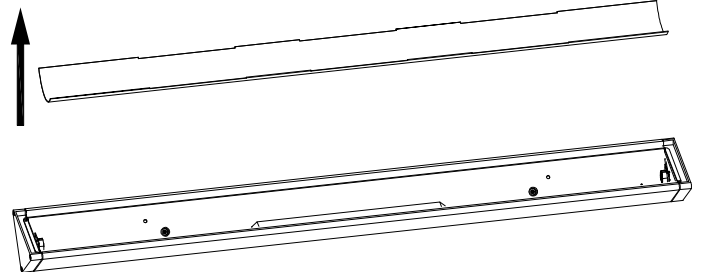


③

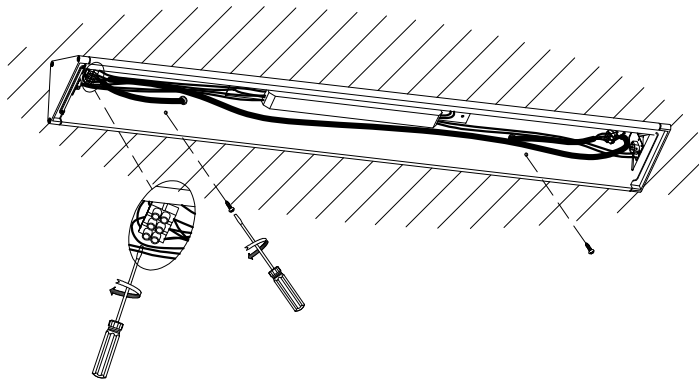

④

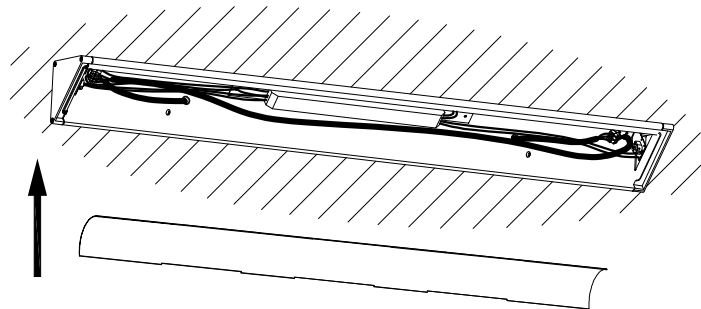

⑤

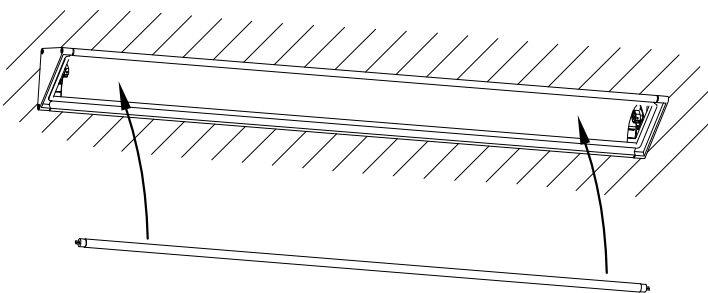

⑥

