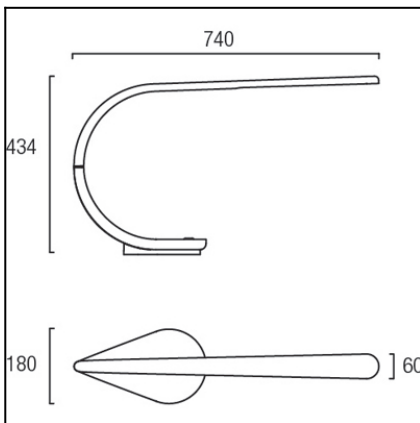


Design by Josep Patsí


The photograph may not match the reference exactly. Please read the product description to identify the finish.


TECHNICAL CHARACTERISTICS

Type:	Table lamp
Adjustable 360° on the vertical axis.	
IP Protection degrees:	IP20
Bulb:	3 x LED Cree. Warm White - 3000K
Power (W):	9
Total power consumption (W):	9
Luminous efficacy (Lm/W):	93, 93
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee:	Yes, 5 years
Units per box:	1
Net Weight (Kg):	4.705
EAN:	8435111093054,00


MATERIALS / FINISHES

Structure material: Polyurethane
Structure finish: Matt white


Diffuser material: Methacrylate
Diffuser finish: Transparent

Download photometric file .ldt / .ies

Luminaire		Measur.		Lamp		
Code	10-0055-BW-BW	Code	10-0055-BW-BW	Code	10-0055-BW-BW	
Name	Sobremesa SWAY leds 3x3W	Name	Sobremesa SWAY leds 3x3W	Number	1	
Line	- LEDS C4 LEDS	Date	15-03-2013	Position	Universal	
Efficiency	100.00%	Coordinate system	CG	Total Flux	248.43 lm	
Maximum value	119.47 cd	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	740 mm	Width	60 mm	Height	20 mm
Rectangular Luminous Area	Length	125 mm	Width	15 mm	Height	0 mm
Horizontal Luminous Area	0.001875 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000454 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	90			
Measurement Distance	6.44	Measurement Flux	248.43 lm			
Operator	Asselum T2	Source voltage	230.00 V			
Temperature	20.00 °C	Source current	PRC			
Humidity	49.00 %	Photocell				
Notes						


Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
- LEDS C4 LEDS	10-0055-BW-BW	Lámpara led blanco cálido 3x3W	248.43	9.00	1	
C.I.E.	64 98 100 100 100	D DIN 5040	A50			
F UTE	1.00 C	B NBN	BZ 3 / 0.6 / BZ 2			



740mm x 60mm




C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

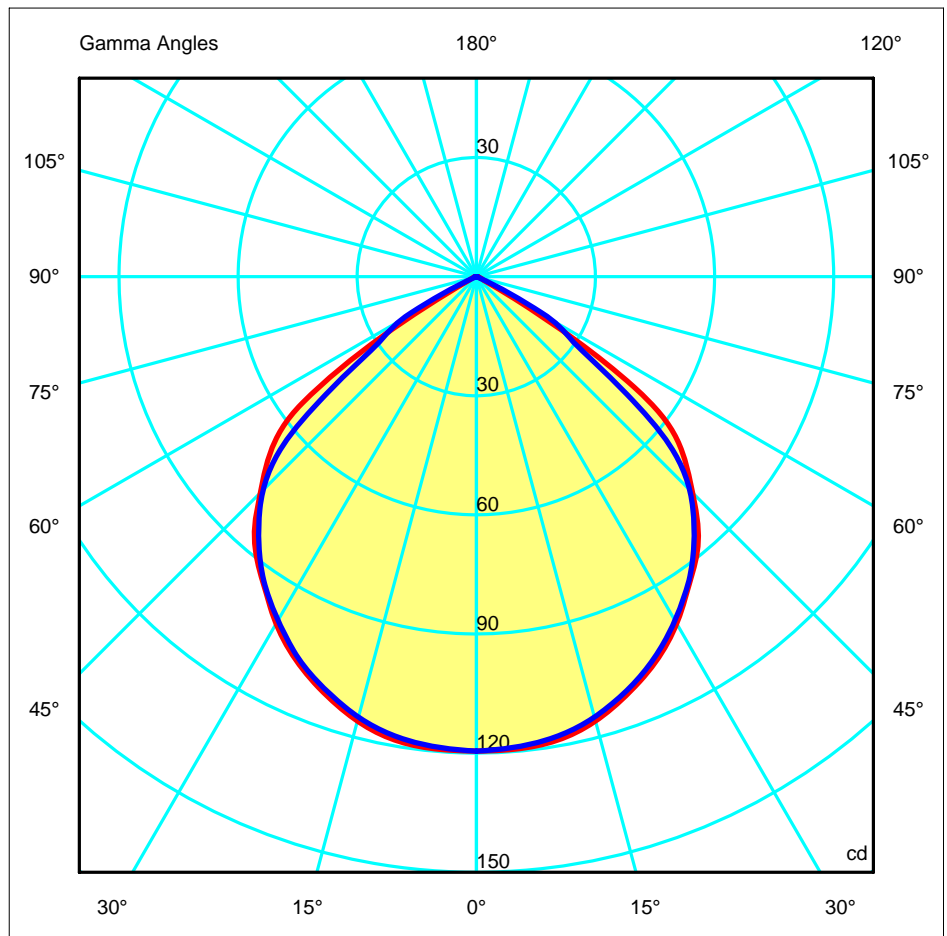


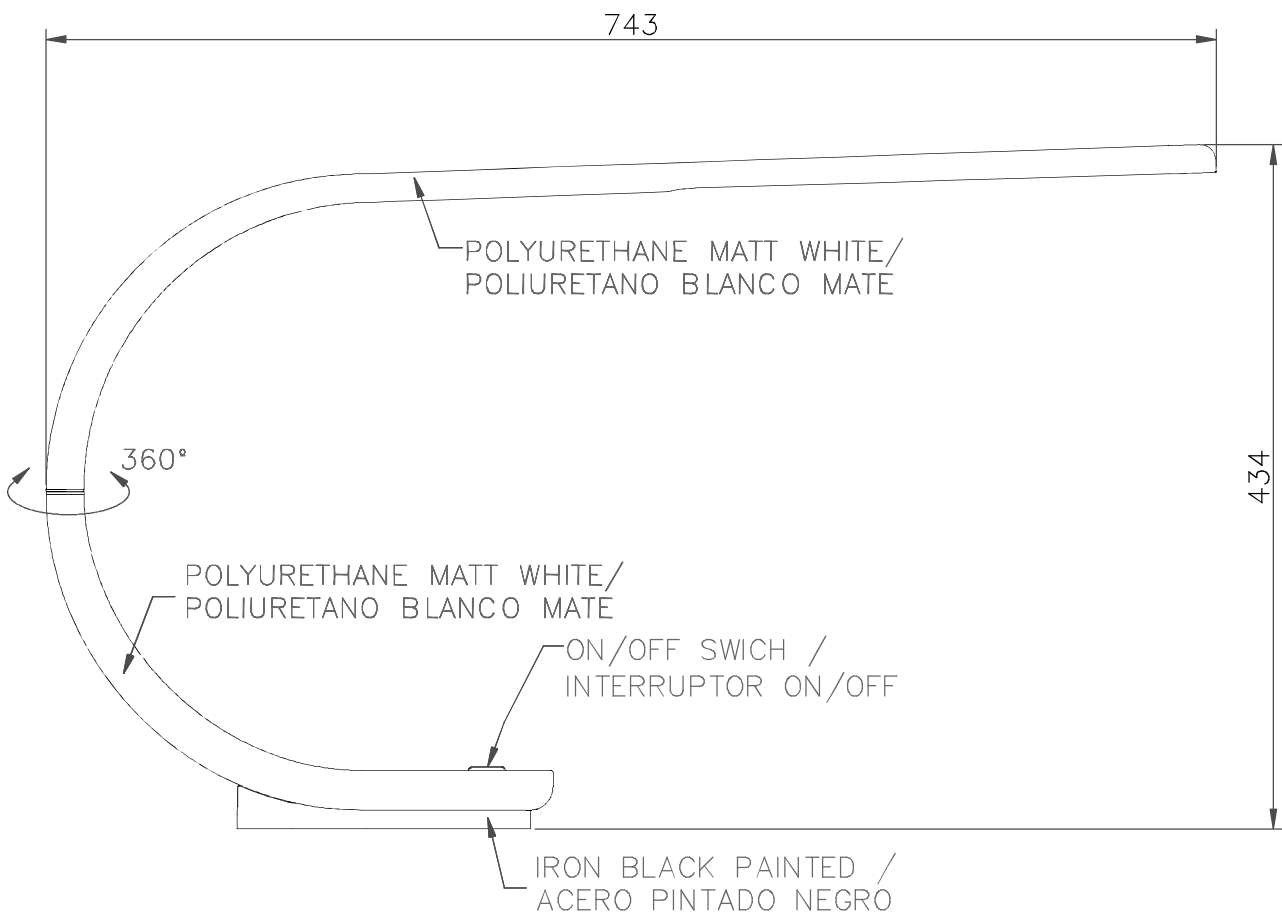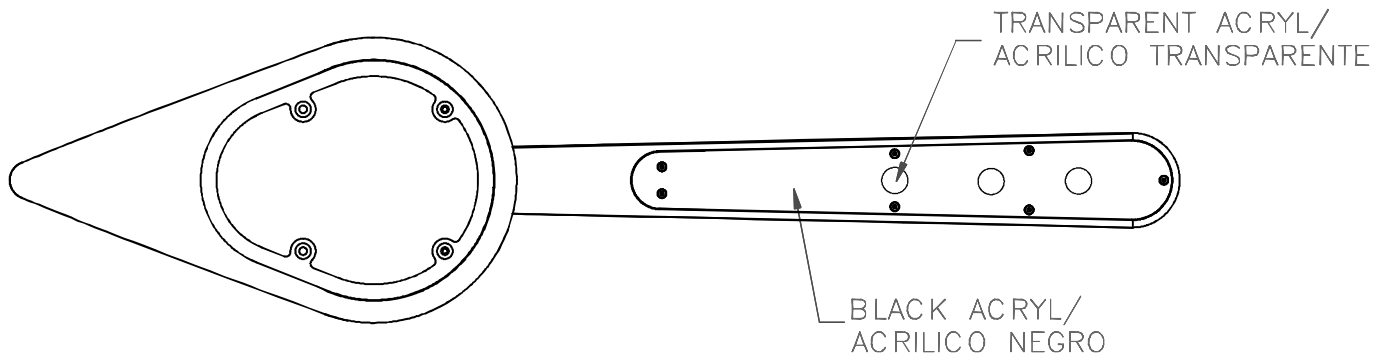

1

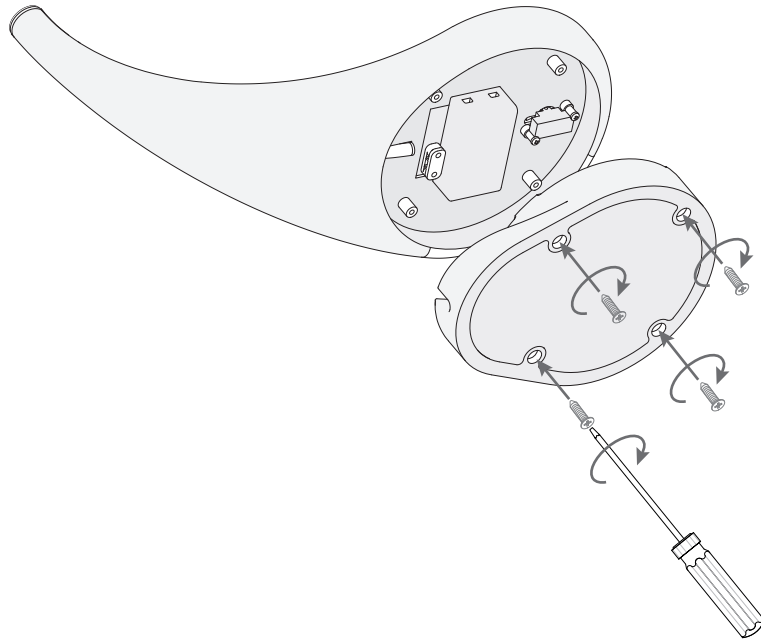

2

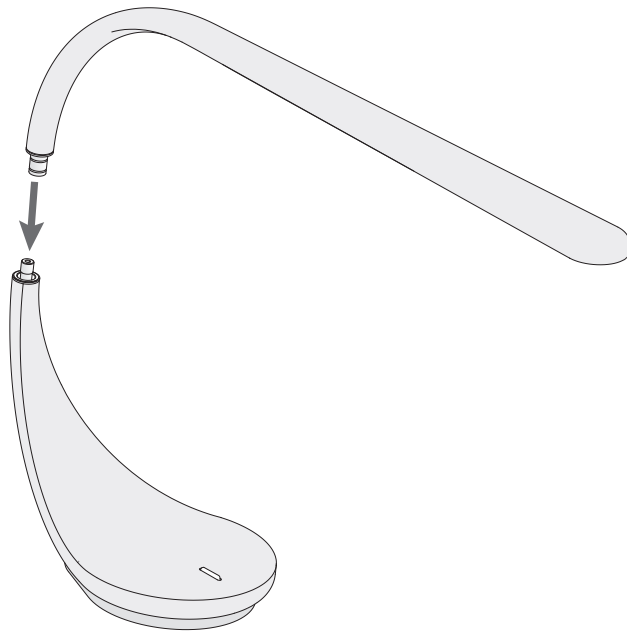

3

