


Design by Josep Patsí



The photograph may not match the reference exactly. Please read the product description to identify the finish.

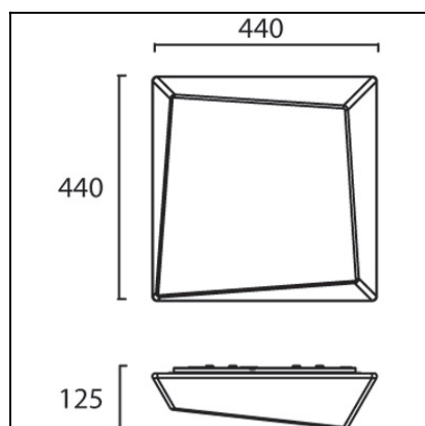

Download photometric file .ldt /.ies

TECHNICAL CHARACTERISTICS

Type:	Ceiling fixture
IP Protection degrees:	IP20
Lampholder:	1 x 2GX13 1 x 2GX13
Power (W):	2GX13 40W 2GX13 22W
Bulb included:	1 x 2GX13 40W. Warm White - 2700K 1 x 2GX13 22W. Warm White - 2700K
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	2.765
EAN:	8,43538E+12



MATERIALS / FINISHES

Structure material:	Steel	Diffuser material:	Methacrylate
Structure finish:	Matt white	Diffuser finish:	Matt opal


GEAR

Gear included: Yes, electronic

Luminaire			Measurem.			Lamp		
Code	15-2411-BW-M1		Code	15-2411-BW-M1		Code	-	
Name	ACE		Name	ACE		Number	2	
Line	Eulumdat		Date	30-05-2013		Position		
Efficiency			51.85%		Coordinate system	CG	Total Flux	5200.00 lm
Maximum value			159.98 cd/klm		Position	C=60.00 G=1.00	Asymmetrical	
Rectangular Luminaire			Length	440 mm	Width	440 mm	Height	125 mm
Rectangular Luminous Area			Length	440 mm	Width	440 mm	Height	0 mm
Horizontal Luminous Area			0.193600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°			0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°			0.000000 m2		Glare area at 76°		0.046836 m2	
Symmetry Type			Asymmetrical		Maximum Gamma Angle		180	
Measurement Distance			0.00		Measurement Flux		5200.00 lm	
Operator					Source voltage			
Temperature			25.00 °C		Source current			
Humidity			60.00 %		Photocell			
Notes								

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
Eulumdat		-		Name		2600.00	31.00	2
				- - 31.00 W				
C.I.E.	42 71 90 100 52			D DIN 5040	A30			
F UTE	0.52 G			B NBN	BZ 5			


440mm x 440mm






C Halfplanes


180.0 — 0.0
270.0 — 90.0

ULOR 0.11 %
DLOR 51.74 %
RN 0.21 %

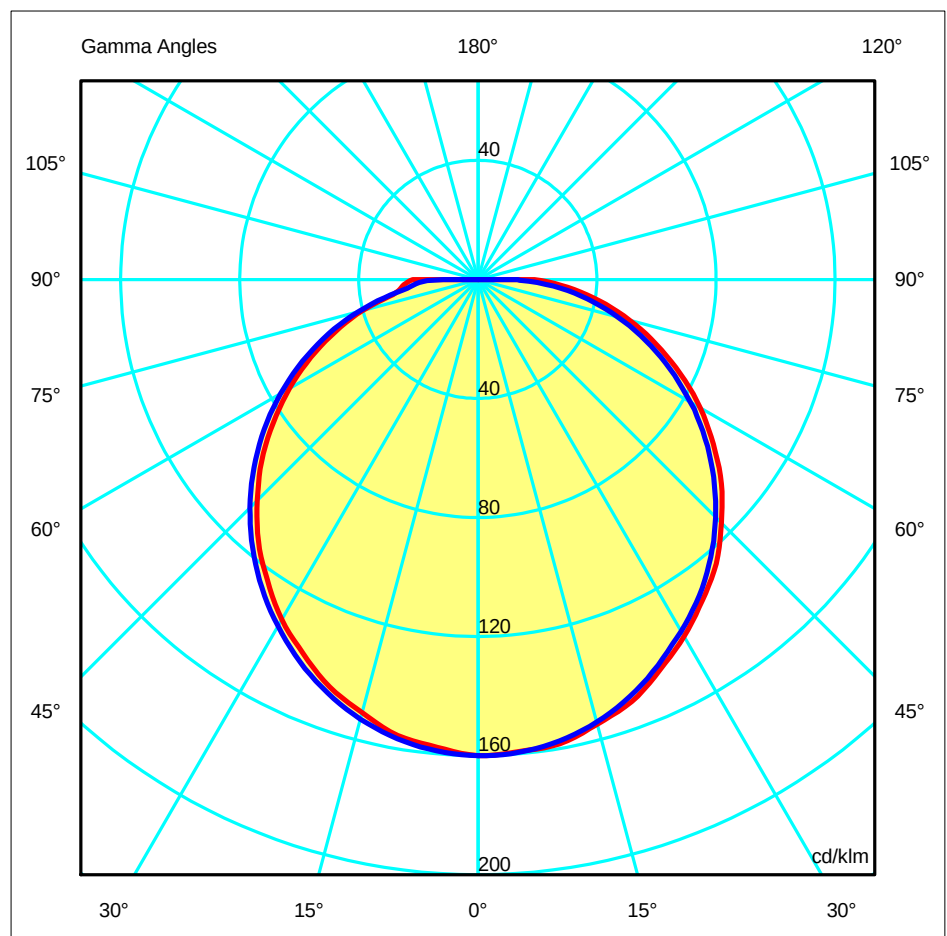


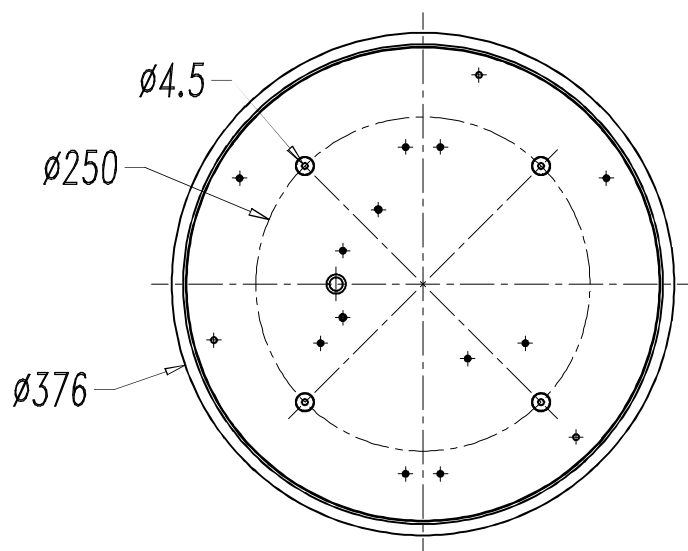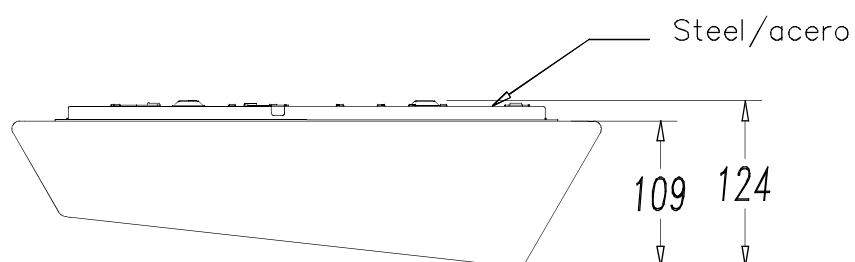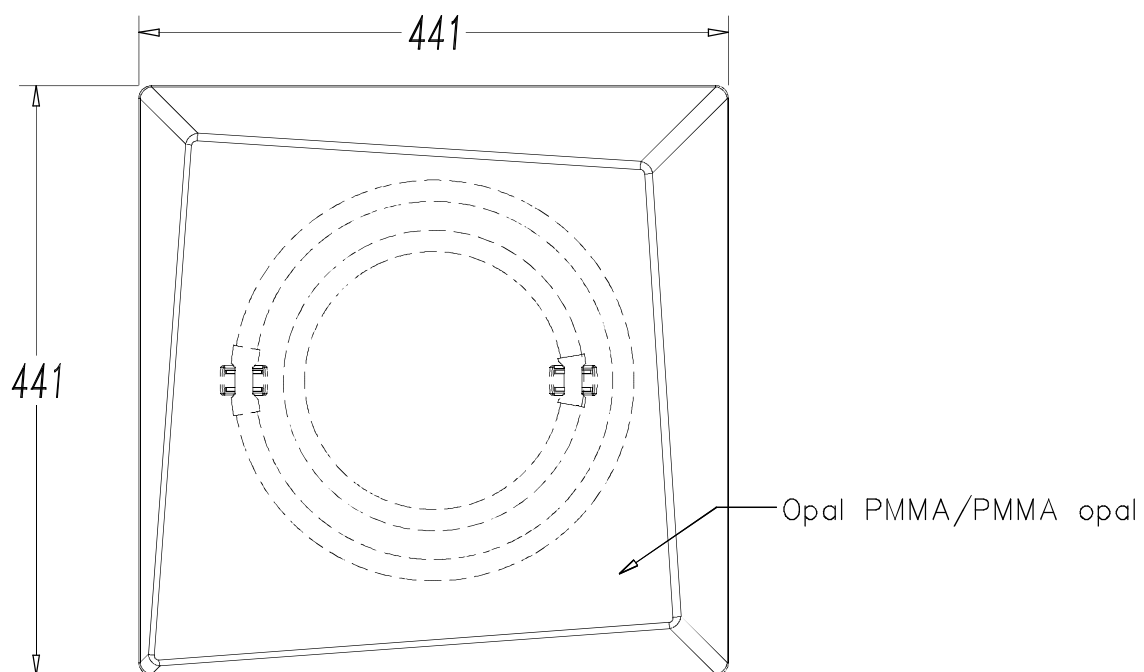


1

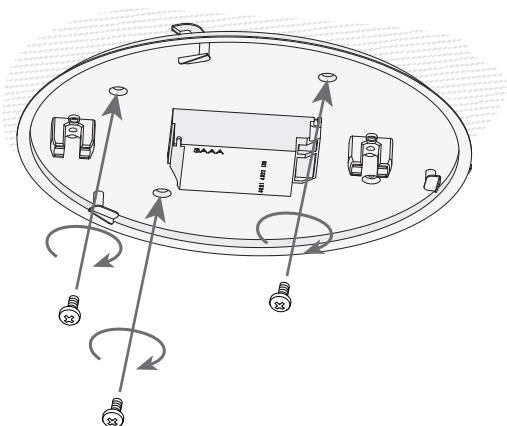


2

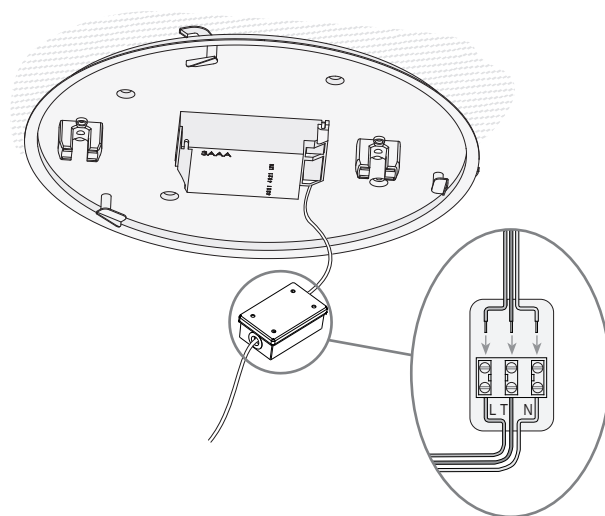


3

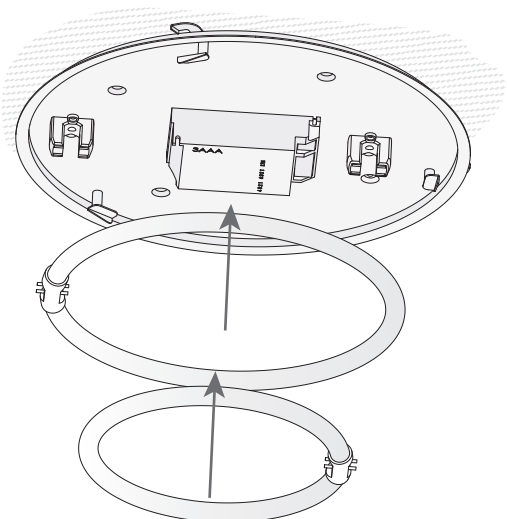

4

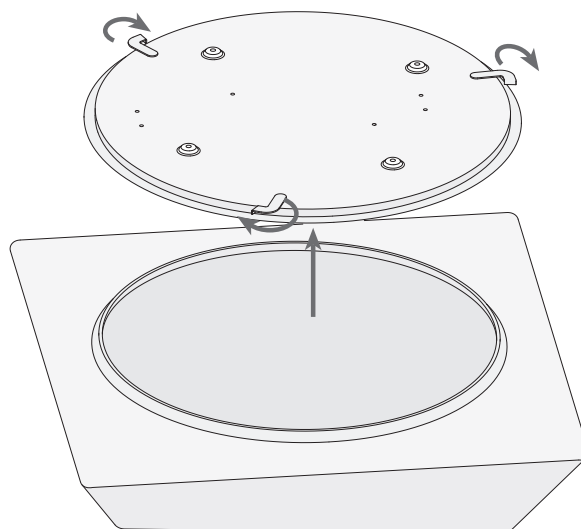

5

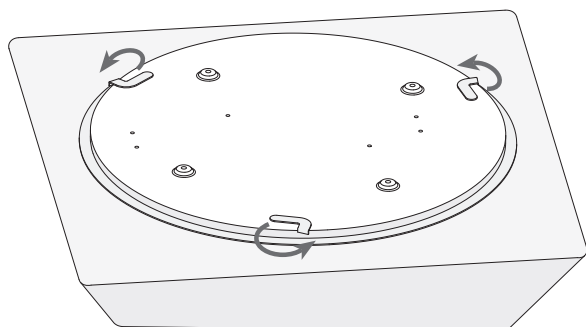

6

