




The photograph may not match the reference exactly. Please read the product description to identify the finish.

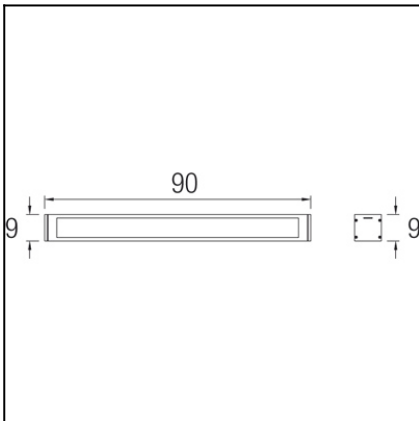

Download photometric file .ldt /.ies

DESCRIPTION

Straight edged light unit. Tempered glass diffuser with body produced in extruded aluminium. Available in light grey. T5 fluorescent lamp light source (not supplied). Includes BAG electronic control components.

TECHNICAL CHARACTERISTICS

Type:	Ceiling fixture
Adjustable $\pm 15^\circ$ on the vertical axis	
IP Protection degrees:	IP54
IK Protection degrees:	IK07
Lampholder:	1 x G5
Power (W):	G5 39W
Total power consumption (W):	39.8
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	4.435
EAN:	8435111089507



MATERIALS / FINISHES

Structure material:	Extruded aluminium	Diffuser material:	Glass
Structure finish:	Grey	Diffuser finish:	Tempered


GEAR

Gear included: Yes, electronic

Luminaire		Measurem.		Lamp		
Code	15-9560	Code	15-9560	Code	OSRAM FQ 39W/840 HO LUMILU	
Name	AFRODITA	Name	AFRODITA	Number	1	
Line	Eulumdat	Date	16-10-2013	Position		
Efficiency	61.09%	Coordinate system	CG	Total Flux	3100.00 lm	
Maximum value	925.51 cd	Position	C=0.00 G=170.00	Double Symmetrical		
Rectangular Luminaire	Length	900 mm	Width	90 mm	Height	4 mm
Rectangular Luminous Area	Length	860 mm	Width	50 mm	Height	0 mm
Horizontal Luminous Area	0.043000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area o n Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°		0.010403 m2	
Symmetry Type	Double Symmetrical		Maximum Gamma Angle		180	
Measurement Distance	0.00		Measurement Flux		3100.00 lm	
Operator			Source voltage			
Temperature	25.00 °C		Source current			
Humidity	60.00 %		Photocell			
Notes						

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	OSRAM FQ 39W/840 HO LUMILUX COOL WHITE 39000W	OSRAM FQ 39W/840 HO LUMILUX COOL WHITE 39000W	39000	39.00	1
C.I.E.	0 0 0 0 61	D DIN 5040	--		
F UTE	0.61 T	B NBN	BZ 10		

900mm x 90mm



C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 61.09 %
DLOR 0.00 %
RN 100.00 %

