




The photograph may not match the reference exactly. Please read the product description to identify the finish.

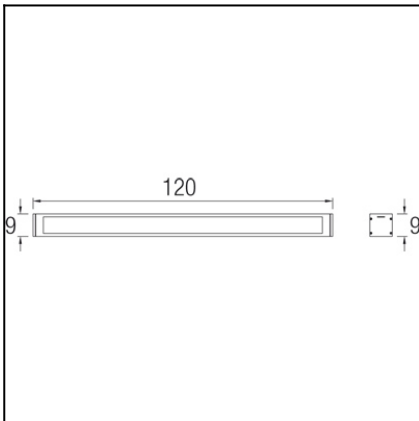

Download photometric file .ldt /.ies

DESCRIPTION

Straight edged light unit. Tempered glass diffuser with body produced in extruded aluminium. Available in light grey. T5 fluorescent lamp light source (not supplied). Includes BAG electronic control components.

TECHNICAL CHARACTERISTICS

Type:	Ceiling fixture
Adjustable $\pm 15^\circ$ on the vertical axis	
IP Protection degrees:	IP54
IK Protection degrees:	IK07
Lampholder:	1 x G5
Power (W):	G5 54W
Total power consumption (W):	57.5
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	5.885
EAN:	8435111089514



MATERIALS / FINISHES

Structure material:	Extruded aluminium	Diffuser material:	Glass
Structure finish:	Grey	Diffuser finish:	Transparent


GEAR

Gear included: Yes, electronic

Luminaire		Measur.		Lamp		
Code	15-9561	Code	15-9561	Code	TL5 HO sup80 54W/840	
Name	AFRODITA	Name	AFRODITA	Number	1	
Line	Eulumdat	Date	16-10-2013	Position		
Efficiency	53.53%	Coordinate system	CG	Total Flux	4450.00 lm	
Maximum value	1571.87 cd	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	1200 mm	Width	90 mm	Height	5 mm
Rectangular Luminous Area	Length	1165 mm	Width	50 mm	Height	1 mm
Horizontal Luminous Area	0.058250 m2	Emitting area on Plane 180°		0.001165 m2		
Emitting area on Plane 0°	0.001165 m2	Emitting area on Plane 270°		0.000050 m2		
Emitting area on Plane 90°	0.000050 m2	Glare area at 76°		0.015222 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle		90		
Measurement Distance	0.00	Measurement Flux		4450.00 lm		
Operator	25.00 °C		Source voltage			
Temperature	60.00 %		Source current			
Humidity			Photocell			
Notes						

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumat	TL5 HO sup80 54W/840	TL5 HO sup80 54W/840 - 54.00 W	4450.00	54.00	1
C.I.E.	67 92 99 100 54	D DIN 5040	A50		
F UTE	0.54 C	B NBN	BZ 2		

1200mm x 90mm



C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 53.53 %
 RN 0.00 %

