


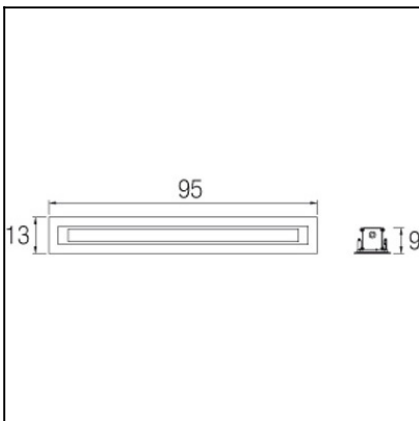

The photograph may not match the reference exactly. Please read the product description to identify the finish.


DESCRIPTION

May be flush mounted into the wall. Body produced in extruded aluminium with an aluminium surround and a tempered glass diffuser. Light source using fluorescent bulb (not supplied). Available in two sizes: one for T5 39W and the other for T5 54W lights. Includes BAG electronic control components. It can be rotated by $\pm 15^\circ$. Its design with wire outlets on both sides makes it particularly suitable for an array installation

TECHNICAL CHARACTERISTICS

Type:	Downlight
Adjustable $\pm 15^\circ$ on the vertical axis	
IP Protection degrees:	IP54
IK Protection degrees:	IK07
Lampholder:	1 x G5
Power (W):	G5 39W
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	4.03
EAN:	8435111089590



MATERIALS / FINISHES

Structure material: Extruded aluminium

Diffuser material: Glass




Structure finish: Grey

Diffuser finish: Tempered

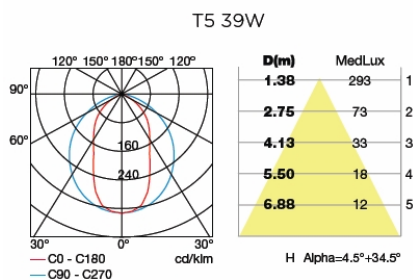
GEAR

Gear included: Yes, electronic

Download photometric file .ldt / .ies

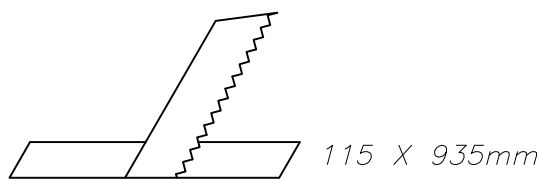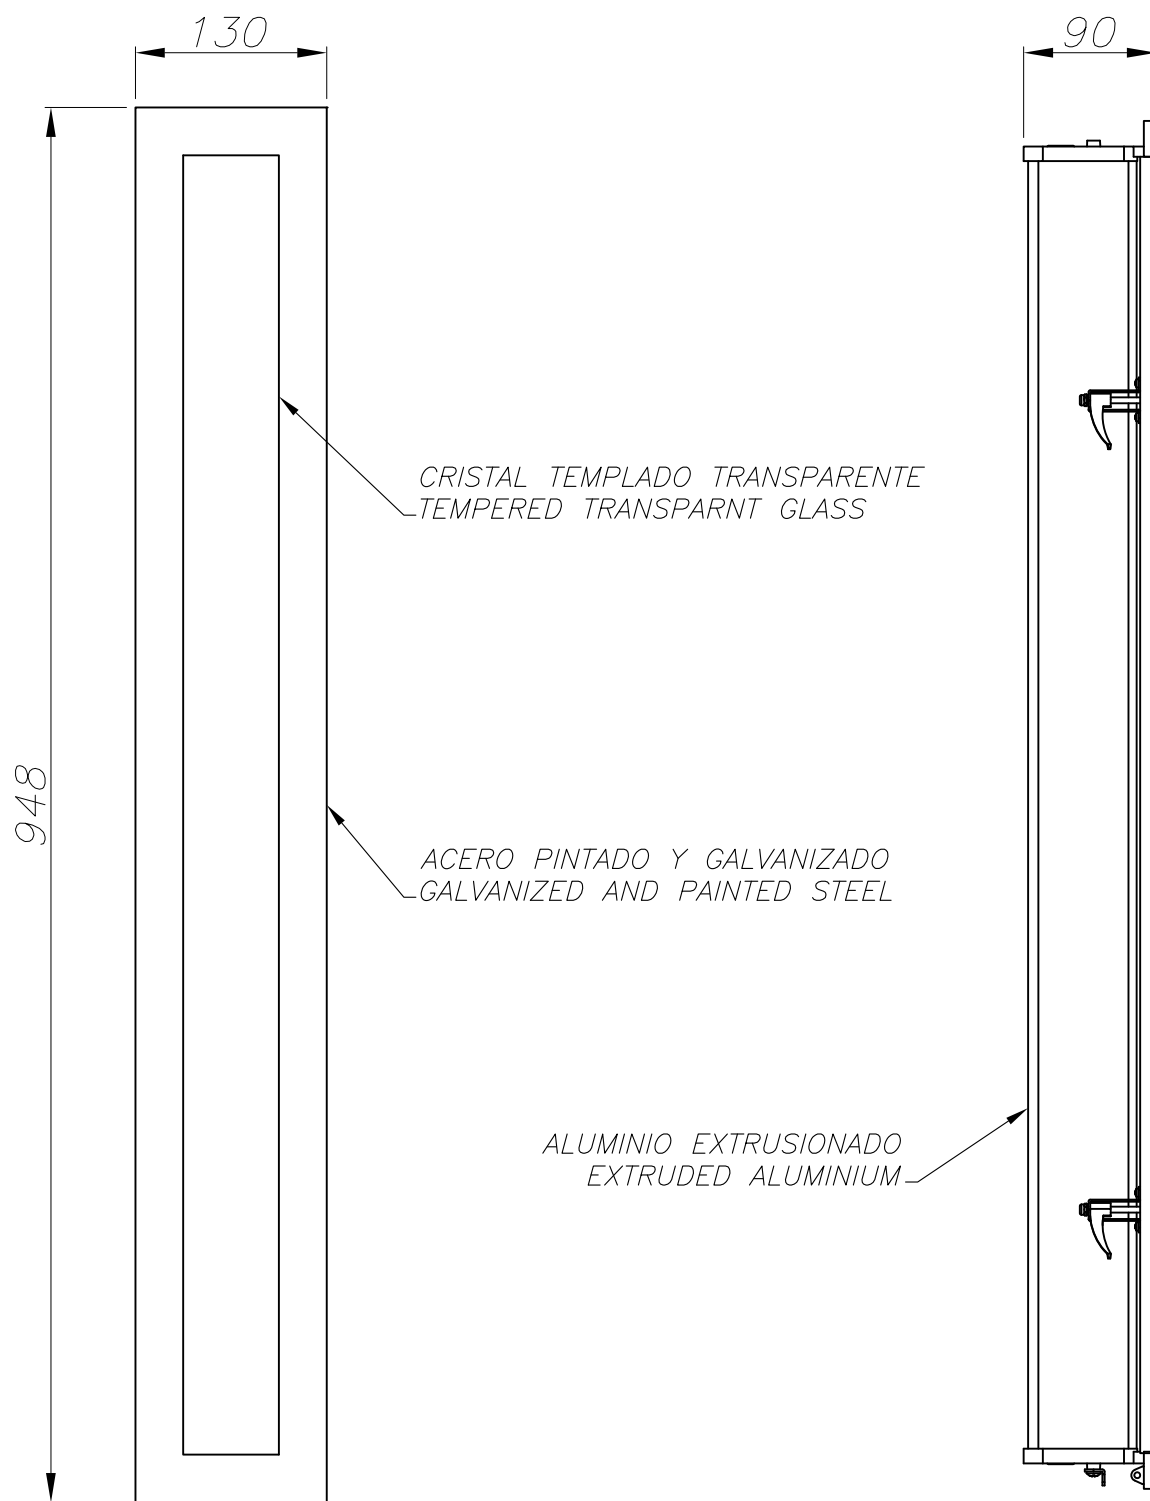

AGUJERO PARA EMPOTRAR
FITTING HOLE

