





The photograph may not match the reference exactly. Please read the product description to identify the finish.

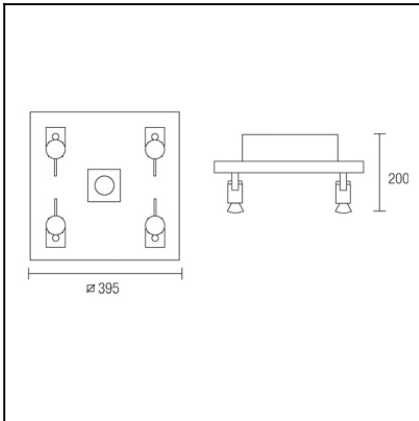

TECHNICAL CHARACTERISTICS

Type:	Ceiling fixture
IP Protection degrees:	IP20
Lampholder:	5 x GU10
Power (W):	GU10 MAX 50W
Bulb included:	5 x GU10 MAX 50W
Total power consumption (W):	250
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	5.715
EAN:	8435111036334,00



MATERIALS / FINISHES


Structure material:	Steel Wenge-colored finish
Structure finish:	Chrome

[Download photometric file .ldt / .ies](#)

Luminaire		Measur.		Lamp		
Code	415-CR	Code	415-CR	Code	64826FL	
Name	Aplique 5x50W GU10	Name	Aplique 5x50W GU10	Number	5	
Line	- LEDS-C4	Date	22-11-2013	Position	Universal	
Efficiency	100.00%	Coordinate system	CG	Total Flux	1850.00 lm	
Maximum value	3666.13 cd	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	390 mm	Width	390 mm	Height	200 mm
Rectangular Luminous Area	Length	320 mm	Width	320 mm	Height	0 mm
Horizontal Luminous Area	0.102400 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.024773 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle		180		
Measurement Distance	6.44	Measurement Flux		1784.31 lm		
Operator	Asselum T2	Source voltage		230.00 V		
Temperature	20.00 °C	Source current		PRC		
Humidity	46.00 %	Photocell				
Notes						

Line		Code	Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
OSRAM 2006 HS, HM, HD, HR		64826FL	Name HALOPAR® 16 50W GZ10		370.00	50.00	5
C.I.E.	83 97 99 99 100		D DIN 5040	A61			
F UTE	0.99 B + 0.01 T		B NBN	BZ 1			

390mm x 390mm



C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 1.39 %
 DLOR 98.61 %
 RN 1.39 %

