


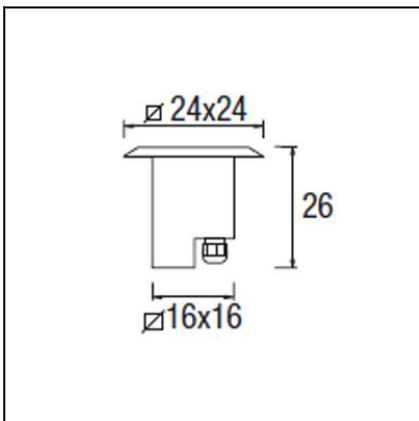


The photograph may not match the reference exactly. Please read the product description to identify the finish.


DESCRIPTION


May be flush mounted into the floor. Body produced in injected aluminium, with an AISI 304 stainless steel surround and a clear glass diffuser. For G12 HID 70W +/-15° rotatable bulb light source. Includes a 18° beam reflector and a 100° beam reflector. Its wire outlets on both sides makes it suitable for an array installation. Includes flush mounting box.

TECHNICAL CHARACTERISTICS

Type:	Downlight
Adjustable ±15° on the vertical axis	
IP Protection degrees:	IP67
IK Protection degrees:	IK08
Lampholder:	1 x G12
Power (W):	G12 HIT-T-70W
Angle of the optics/Reflector:	100°, 16°
Voltage / Frequency:	230V/50Hz
Warranty (Years):	2
Units per box:	2
Net Weight (Kg):	6.43
EAN:	8435111050002


MATERIALS / FINISHES

Structure material:	Stainless steel AISI304 Aluminium	Diffuser material:	Glass
Structure finish:	Polished	Diffuser finish:	Tempered

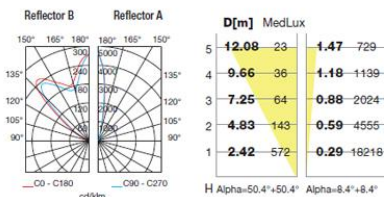
GEAR

Gear included: Yes, Magnetic



Download photometric file .ldt / .ies

Luminaria		Ensayo		Lámpara	
Código	55-9232-Y4-37 BRILLO	Código	55-9232-Y4-37 BRILLO	Código	CDMT70
Nombre	Uplight 70W HM G12 ref brillo	Nombre	Uplight 70W HIT-T G12 brillo	Número	1
Familia	- LEDS-C4	Fecha	12-11-2008	Posición	Universal
Eficiencia	59.09%	Sist. de Coorden.	C-G	Flujo Total	6400.00 lm
Valor Máximo	4633.77 cd/klm	Posición	C=0.00 G=0.00		Bisimétrico

240mm x 240mm



Semiplanos C

180.0 ——— 0.0
270.0 ——— 90.0

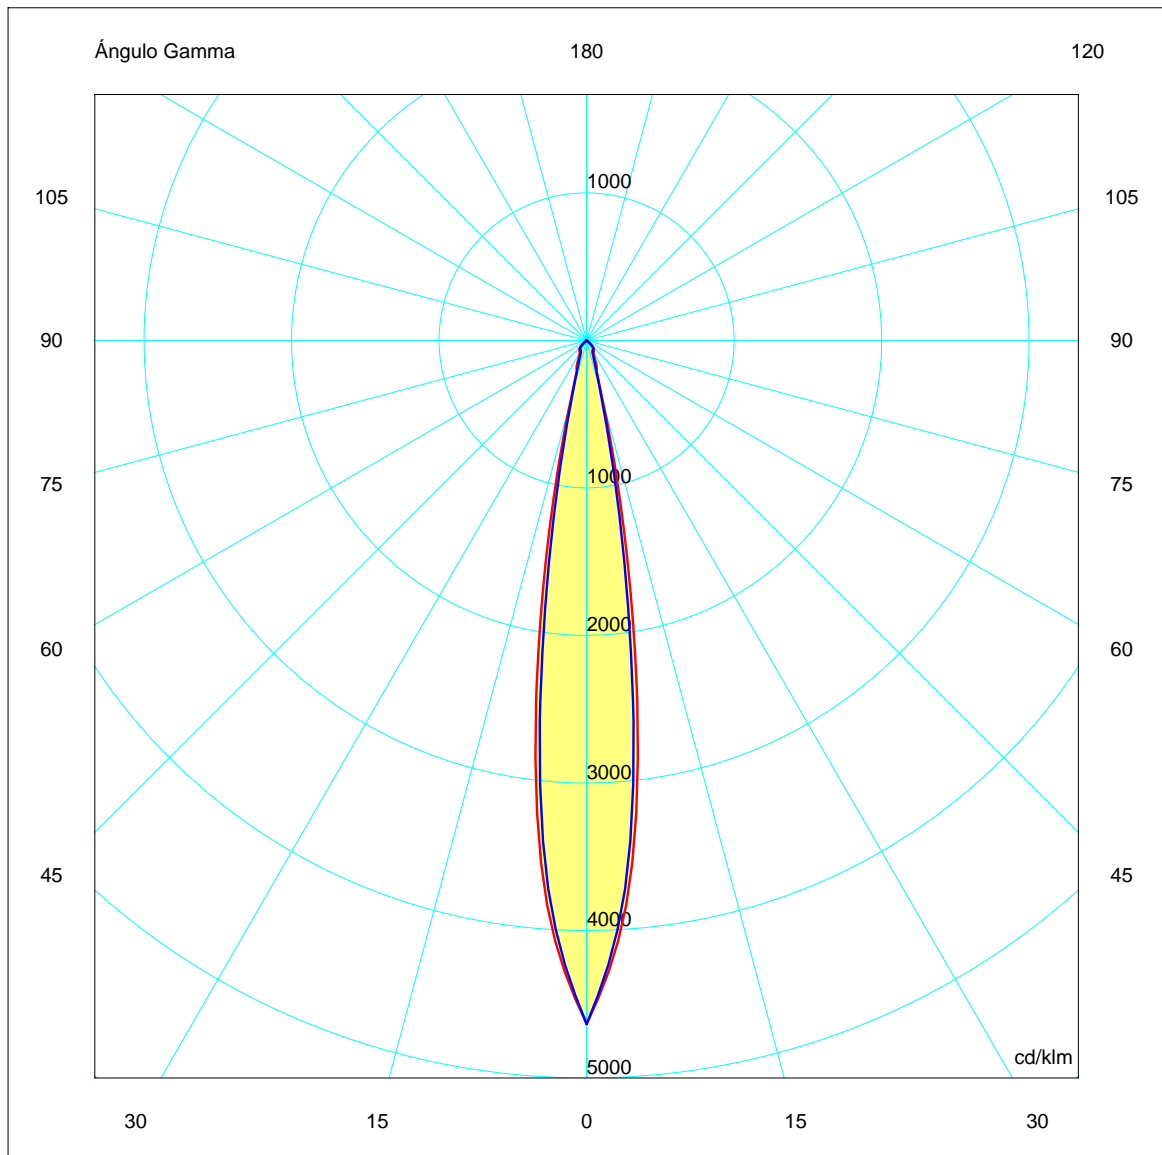


260

ALUMINIO INYE
INJECTED ALU

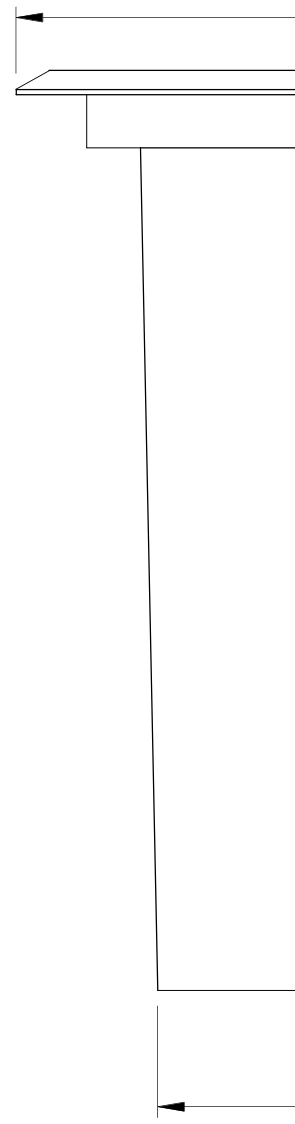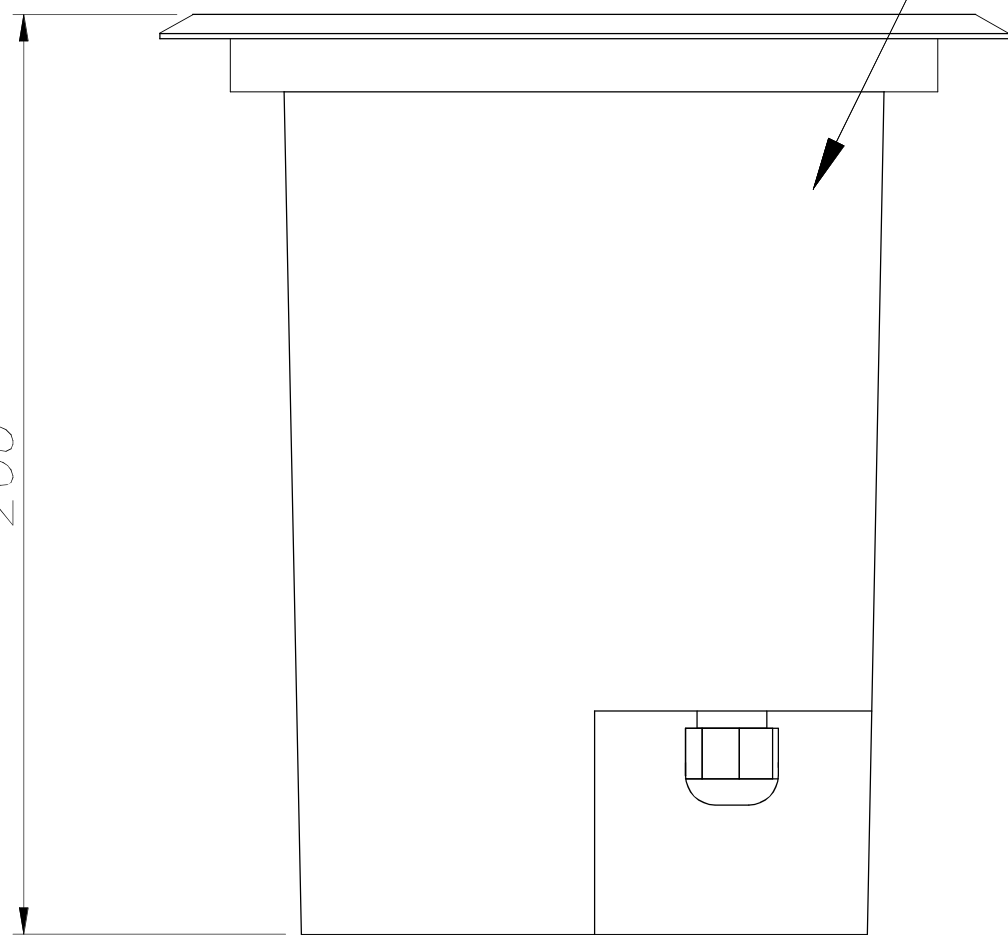

240

CRISTAL TR
TRANSPARE

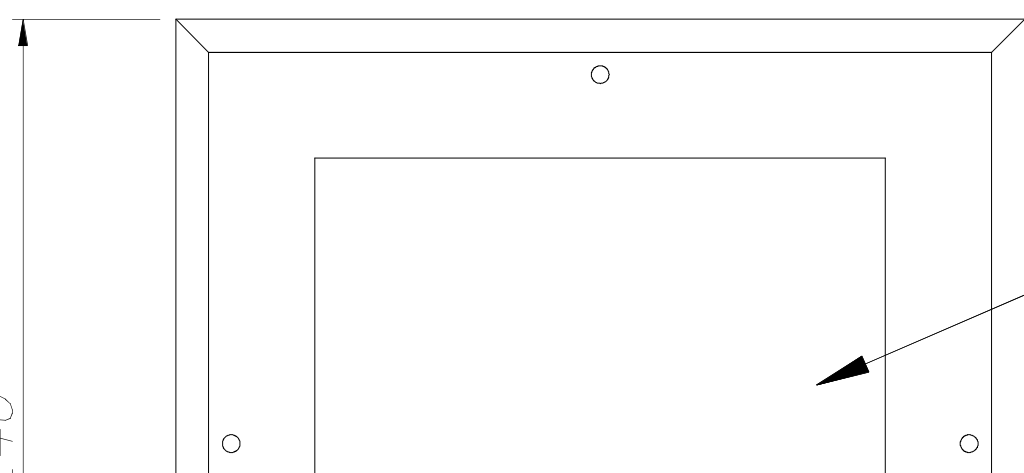

CA
FL

