




Downlight para lámpara HIT-TC, QT-TC o TC-TEL.
Fixed downlight for HIT-TC, QT-TC or TC-TEL lamps.

- DN-1006-XX-XX TC-TEL GX24q-3
- DN-1007-XX-XX HIT-TC G8.5
- DN-1008-XX-XX QT-TC G8.5



CÓDIGO CODE	COLOR COLOUR	LÁMPARA LAMP	VOLT. VOLT	W	HAZ BEAM	EQUIPO GEAR	INSTALACIÓN INSTALLATION	
DN-1006-14-B9	○	TC-TEL GX24q-3	230	1x26W	95°			117
DN-1006-N3-B9	●	TC-TEL GX24q-3	230	1x26W	95°			117
DN-1006-60-B9	●	TC-TEL GX24q-3	230	1x26W	95°			117
DN-1006-S2-B9	◐	TC-TEL GX24q-3	230	1x26W	95°			117
DN-1007-14-B9	○	HIT-TC G8.5	230	max.70W	60°			30
DN-1007-N3-B9	●	HIT-TC G8.5	230	max.70W	60°			30
DN-1007-60-B9	●	HIT-TC G8.5	230	max.70W	60°			30
DN-1007-S2-B9	◐	HIT-TC G8.5	230	max.70W	60°			30
DN-1008-14-B9	○	QT-TC G8.5	12	max.60W	60°			31
DN-1008-N3-B9	●	QT-TC G8.5	12	max.60W	60°			31
DN-1008-60-B9	●	QT-TC G8.5	12	max.60W	60°			31
DN-1008-S2-B9	◐	QT-TC G8.5	12	max.60W	60°			31

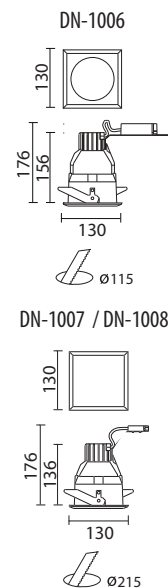

(*) Consultar
(*) Consult

(1) Equipo no incluido, a pedir separadamente, ver pág. 194
(1) Gear not included, to be ordered separately, see page 194

