

Vision

Familia de downlights led de alto confort visual, ideales para iluminaciones generales; su diseño minimalista y reflector blanco facilitan su integración arquitectónica. Incorpora led XPE cálido de Cree. Versiones fija y orientable.

Family of LED downlights providing a high level of visual comfort, ideal for general lighting. Their minimalist design and white reflectors facilitate architectural integration. Installed with a warm XPE LED by Cree. Fixed and adjustable versions.

Familied'éclairagesàdiodesélectroluminescentes vers le bas apportant un excellent confort visuel, idéaux pour les éclairages généraux; leur design minimaliste et leur réflecteur blanc assurent leur intégration dans l'architecture. Installation d'une diode électroluminescente XPE de Cree à lumière chaude. Proposés en versions fixe et orientable.

Downlight-LED-Produktfamilie mit optisch angenehmem Licht, ideal für allgemeine Beleuchtung. Durch das minimalistische Design und den weißen Reflektor wird die Integration in die Architektur erleichtert. Installation LED XPE warm von Cree. Feste und ausrichtbare Ausführung.




- Downlight entregado con dos cajas separadas.
- Downlight with 2 separate boxes included.
- Downlight / spot encastrable remis avec deux boîtes séparées.
- Einbau-Downlight geliefert in 2 verschiedenen Kartons.

Referencia completa
Complete reference
Référence complète
Artikel komplett

Acabados Finishes	Ópticas Lenses	Warm W / Cálido 2900k			ALU GLASS
○	○	90-3475-14-14	=	90-3455-14-M3	IP 44
○	□	90-3476-14-14		90-3455-14-M3	
◐	○	90-3476-14-N3		90-3455-14-M3	
					71-3457-14-00
					71-3458-14-00
					71-3458-N3-00

Acabados Finishes	Ópticas Lenses	Warm W / Cálido 2900k			ALU PMMA
○	○	90-3477-14-14	=	90-3456-14-00	IP 20
○	□	90-3478-14-14		90-3456-14-00	
◐	○	90-3478-14-N3		90-3456-14-00	
					71-3457-14-00
					71-3458-14-00
					71-3458-N3-00

equivalente a brighter as 50W Halogen



pag. 105


○ 14 Blanco / White
Blanc / Weiß

● N3 Gris / Grey
Gris / Grau

max. 87,4 Lm/watt



Ø98mm

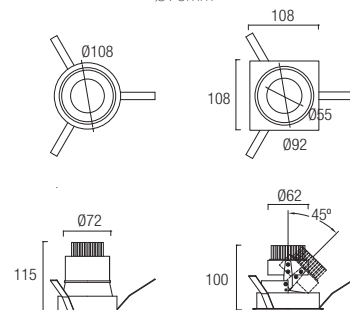

Equipos (ver pág. 102-103) / Gears (see page 102-103)
Équipes (voir page 102-103) / Treiber (siehe seite 102-103)

350mA

- ACT-0804-00-00 (1 pieza / 1 piece)
- ACT-0808-00-00 (1 a 2 piezas / 1 to 2 pieces)
- ACT-0816-00-00 (1 a 4 piezas / 1 to 4 pieces)

700mA

- 71-3307-00-00 (1 pieza / 1 piece)
- 71-3308-00-00 (1 pieza / 1 piece)

DIMMING


350mA

71-3475-00-00 (1 a 3 piezas / 1 to 3 pieces)

700mA


71-3475-00-00 (1 a 2 piezas / 1 to 2 pieces)

90-3475-14-14
Blanco cálido / Warm white -12w -40°



H (m)	D (m)	Emed (lux)
1	1.10	210
2	2.19	52
3	3.29	23
4	4.38	13
5	5.48	8

90-3477-14-14
Blanco cálido / Warm white -12w -40°



H (m)	D (m)	Emed (lux)
1	1.18	298
2	2.36	74
3	3.54	33
4	4.72	19
5	5.90	2