

Family of floor, ceiling and wall elements, efficient with an highly versatile linear luminous output. Body in aluminium extruded and opal white polycarbonate diffuser. Horizontal cantilever wall version supplied with kit for connection with remote driver. White or balck finishing with elements in grey painted on the floor and wall versions.



www.nemolighting.com Page 1



L102 LED

Lamping

Source linear LED

Total power 24W

Emission diffused, Up or Down

 Tension
 24V DC

 Color temperature
 3000K

 Luminous flux
 2400lm

 Typ cri
 80

 Energy class
 A+

 lp class
 44

Materials Aluminium + PC + ABS

Notes driver not included, side emission


Codes Structure Diffuseur

LIN LWD 31 white/grey

white

Package 1

Dimensions53x53x35Gross weight3.5 Kg

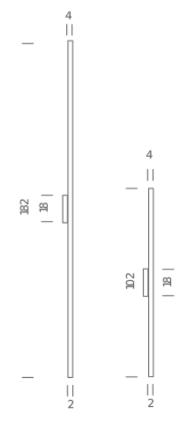

www.nemolighting.com Page 2



NEMO STUDIO

L182 LED

Lamping

Source linear LED

Total power 42W

Emission diffused, Up or Down

 Tension
 24V DC

 Color temperature
 3000K

 Luminous flux
 4320lm

 Typ cri
 80

 Energy class
 A+

 lp class
 44

Materials Aluminium + PC + ABS

Notes driver not included, side emission


Codes Structure Diffuseur

LIN LWD 32 white/grey

white

Package 1

Dimensions53x53x35Gross weight3.5 Kg

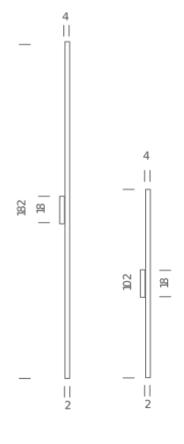

www.nemolighting.com Page 3