


louis poulsen

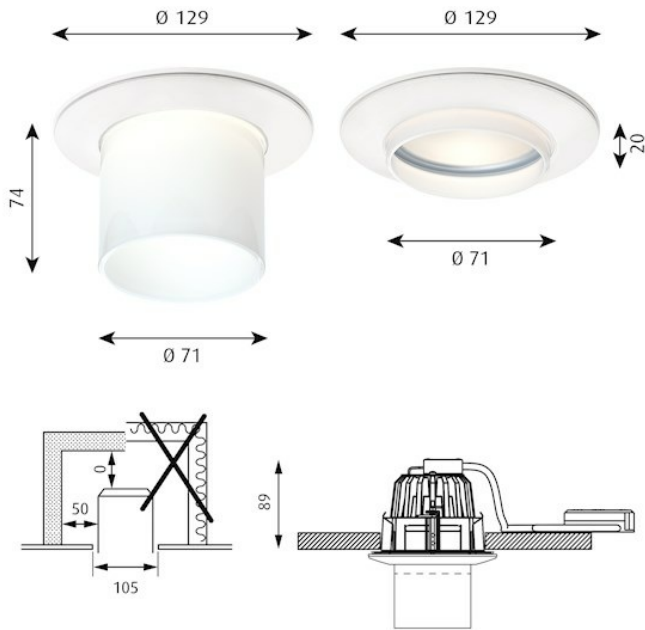

AH Mini

Design:

Alfred Homann

Concept:

The light distribution is symmetric and directed downwards. The opal glass cylinder provides soft light for both the ceiling and space. It also significantly reduces the angle of glare, so that passers-by are exposed to minimal glare. Two lengths of the glass create different lighting effects.

Finish:

White, wet painted

Material:

Ring: Die cast aluminum. Glass: White opal glass.

Mounting:

Ceiling thickness: 5-32mm. Ceiling Cut-Out: \varnothing 105mm. Looping: Not approved. Driver hardwired to housing. For more information please look at www.louis Poulsen.com.

Weight:

Min: 0.6 kg Max: 3.3 kg

Class:

Ingress protection IP20. Electric shock protection II.

Info notes:

Supplied with light source. For LED replacement kits please do contact Louis Poulsen. The innovation of the LED technology is constant. The specifications mentioned are based on present technology. Please find updated info on products on our website www.louis Poulsen.com

PRODUCT OVERVIEW

Dimensions	CCT/Watt/ Lumen	Light source	Lighting control	Efficacy	Order-no.
LONG	3000K 15.0 594	15W LED 3000K	DALI	40	5742586560
SHORT	3000K 15.0 714	15W LED 3000K	DALI	48	5742586573