

Typology: Plafond

Description / Descripción

Ribboned ceiling lamp with methacrylate diffuser.


Fixing system by magnets.

Only available in Group-C ribbons.

Plafón encintado con difusor en metacrilato y sistema de sujeción por imanes.

Disponible solo en cintas de Grupo C.

General measures / Medidas generales

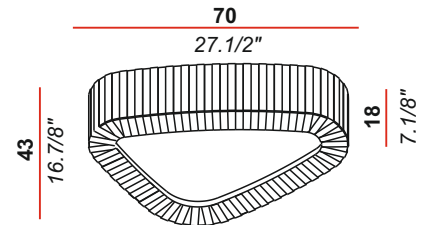

Light bulb / Bombillas

Voltage: 220-230V / 50-60Hz
120-277V / 50-60Hz (USA)

European version

PT.001.00C	A		2 x 2G11 24W
PT.001.12C	A		2 x 2G11 24W Dimmable 1-10V
PT.001.13C	A		2 x 2G11 24W Dimmable-Dali
PT.001.17C	A++		LED Module 27W 3000K 3200lm Dimmable Touch
PT.001.18C	A++		LED Module 27W 3000K 3200lm Dimmable DALI

USA version

TUS.PT.001.04C		2 x 24W / Twin Tube / 2G-11 Base / 120-277V
TUS.PT.001.13C		2 x 24W / Twin Tube / 2G-11 Base / 120-277V / Dimable-Dali
TUS.PT.001.17C		LED Module 27W 3000K 3200lm Dimmable Touch
TUS.PT.001.18C		LED Module 27W 3000K 3200lm Dimmable DALI

Bulbs not included - LED module included
Bombillas no incluidas - Módulos LED incluidos

Packaging / Embalaje

1 box

75x50x20 cm / 0,08 m³
30"x20"x8" / 3 ft³

Peso neto: 5 Kg
Net weight: 11 lb



Features & finishings / Características

Lampshade
Pantalla

Pleated fabrics _Group-C
Cinta plisada_Grupo-C

Fixing system
Sistema fijación

By magnets
Fijación por imanes

Diffuser
Difusor

PMMA 3mm ice matt
PMMA 3mm_hielo mate

Certifications:



USA Certifications:



Light for indoor use only / Luminaria solo para uso interior

Typology: Plafond

Description / Descripción

Ribboned ceiling lamp with methacrylate diffuser.


Fixing system by magnets.

Only available in Group-C ribbons.

Plafón encintado con difusor en metacrilato y sistema de sujeción por imanes.

Disponible solo en cintas de Grupo C.

General measures / Medidas generales

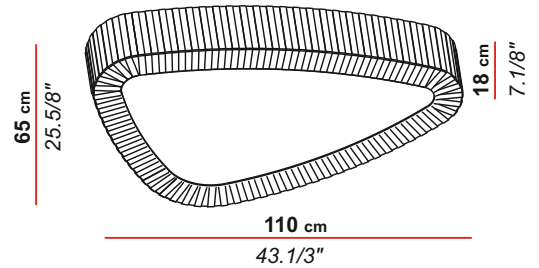

Light bulb / Bombillas

Voltage: 220-230V / 50-60Hz
120-277V / 50-60Hz (USA)

European version

PT.002.00C 4 x 2G11 36W

PT.002.12C 4 x 2G11 36W
Dimmable 1-10V

PT.002.13C 4 x 2G11 36W
Dimmable-Dali

PT.002.17C LED Module 49W
3000K 5700lm
Dimmable Touch

PT.002.18C LED Module 49W
3000K 5700lm
Dimmable DALI

USA version

TUS.PT.002.04C 4 x 36W / Twin Tube / 2G-11 Base /
120-277V

TUS.PT.002.13C 4 x 36W / Twin Tube / 2G-11 Base /
120-277V / Dimmable DALI

TUS.PT.002.17C LED Module 49W
3000K 5700lm
Dimmable Touch

TUS.PT.002.18C LED Module 49W
3000K 5700lm
Dimmable DALI

Bulbs not included - LED module included
Bombillas no incluidas - Módulos LED incluidos

Packaging / Embalaje

1 box

110x70x20 cm / 0,15 m³
44"x28"x8" / 5 ft³

Peso neto: 8 Kg
Net weight: 17,5 lb



Pending

Features & finishings / Características

Lampshade
Pantalla

Pleated fabrics _Group-C
Cinta plisada _Grupo-C

Fixing system
Sistema fijación

By magnets
Fijación por imanes

Diffuser
Difusor

PMMA 3mm ice matt
PMMA 3mm_hielo mate

Certifications:



USA Certifications:



Intertek
4006546



DAMP
Location

Light for indoor use only / Luminaria solo para uso interior

Typology: Plafond

Description / Descripción

Ribboned ceiling lamp with methacrylate diffuser.


Fixing system by magnets.

Only available in Group-C ribbons.

Plafón encintado con difusor en metacrilato y sistema de sujeción por imanes.

Disponible solo en cintas de Grupo C.

General measures / Medidas generales

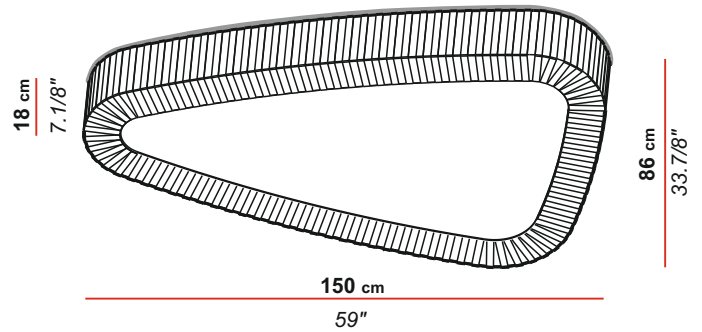

Light bulb / Bombillas

Voltage: 220-230V / 50-60Hz
120-277V / 50-60Hz (USA)

European version

PT.003.00C **A** 4 x 2G11 55W

PT.003.12C **A** 4 x 2G11 55W
Dimmable 1-10V

PT.003.13C **A** 4 x 2G11 55W
Dimmable-Dali

PT.003.17C **A++** LED Module 79W
3000K 9300lm
Dimmable Touch

PT.003.18C **A++** LED Module 79W
3000K 9300lm
Dimmable DALI

USA version

TUS.PT.003.04C 4 x 55W / Twin Tube / 2G-11 Base / 120-277V

TUS.PT.003.13C 4 x 55W / Twin Tube / 2G-11 Base / 120-277V / Dimmable DALI

TUS.PT.003.17C LED Module 49W
3000K 5700lm
Dimmable Touch

TUS.PT.003.18C LED Module 49W
3000K 5700lm
Dimmable DALI

Bulbs not included - LED module included
Bombillas no incluidas - Módulos LED incluidos

Packaging / Embalaje

1 box

160x90x20 cm / 0,3 m³
63"x36"x8" / 10,5 ft³

Peso neto: 15 Kg
Net weight: 33 lb

Features & finishings / Características

Lampshade
Pantalla

Pleated fabrics _Group-C
Cinta plisada _Grupo-C

Fixing system
Sistema fijación

By magnets
Fijación por imanes


Diffuser
Difusor

PMMA 3mm ice matt
PMMA 3mm_hielo mate

Certifications:



USA Certifications:



Light for indoor use only / Luminaria solo para uso interior

