


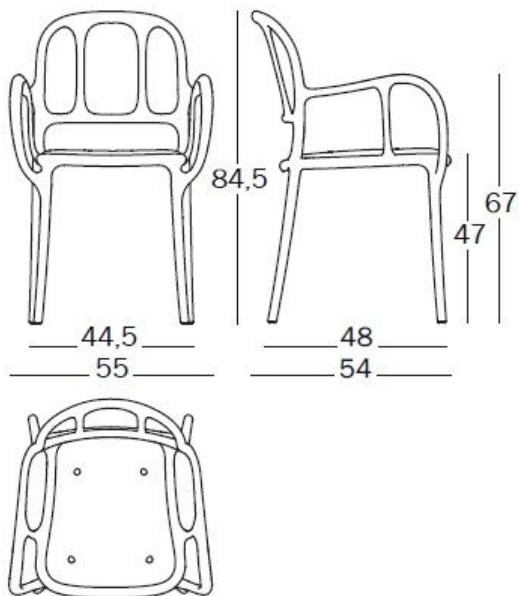

Chair with arms.

In polypropylene with glass fibre added.

Air-moulded. Silky touch finish.

Seat cushion in expanded polyurethane with cover in fabric (Fidivi "King L Kat" e "King L").

SD2106

news

Frame - Seat (fabric):

red 1484 C - KingLKat red F-130

dark green 1556 C - KingL green F-359

yellow 1666 C - KingLKat yellow F-579

beige 1733 C - KingLKat beige F-459

white 1738 C - KingLKat white F-739

black 1769 C - KingL black F-198

	Kg	15,10	m³	0,385 (0,57x0,69x0,98)
		5,30		9401.80.00

Test:

ANSI/BIFMA X5.1-2011

Arm fatigue test EN 1728:2012

Arm sideways static load test EN 1728:2012

Information for use EN 16139:2013, L2

Leg sideways static load test EN 1728:2012

Seat and back fatigue test EN 1728:2012

Seat front edge durability test EN 1728:2012

Stability EN 1022:2005

Vertical load on back rest EN 1728:2012

Arm downwards static load test EN1728:2012

Arm rest impact test EN 1728:2012

Back impact test EN 1728:2012

Leg forward static load test EN 1728:2012

Safety requirements EN 16139:2013, L2

Seat and back static load test EN 1728:2012

Seat impact test EN 1728:2012

Tested and classified by MPA Stuttgart in die Klasse P-b nach

DIN 66084