


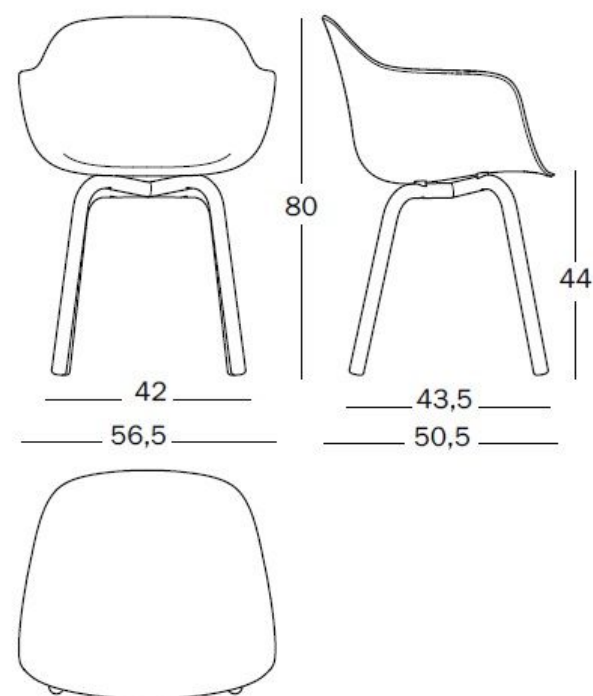

### Aluminium Armchair.

Frame in anodised aluminium tube.

Seat in polypropylene.

! Suitable for outdoor use.

**SD5070**

Frame - Seat:

natural - white 1735 C

natural - mustard 1015 C

natural - beige grey 1452 C

black - black 1768 C

|  |    |      |    |                        |  |
|--|----|------|----|------------------------|--|
|  | Kg | 9,00 | m³ | 0,308 (0,64x0,57x0,85) |  |
|  |    | 4,90 |    | 9401.69.00             |  |

Frame in anodised aluminium tube.

Seat in polypropylene covered in fabric  
(Kvadrat, "Sunniva").

\_Expanded polyurethane (1 IM)

**SD5074**

Frame - Seat:

natural - R1 Sunniva beige (717)

natural - R2 Sunniva pink (236)

natural - R3 Sunniva light green (132)

black - R4 Sunniva dark grey (1079)

|  |    |      |    |                        |  |
|--|----|------|----|------------------------|--|
|  | Kg | 9,30 | m³ | 0,308 (0,64x0,57x0,85) |  |
|  |    | 5,20 |    | 9401.69.00             |  |

Frame in anodised aluminium tube.

Seat in polypropylene covered in premium-  
grade leather.

**SD5078**

Frame - Seat:

natural - L1 natural L-0090

black - L2 black L-0060

|  |    |      |    |                        |  |
|--|----|------|----|------------------------|--|
|  | Kg | 9,50 | m³ | 0,308 (0,64x0,57x0,85) |  |
|  |    | 5,40 |    | 9401.69.00             |  |

### Test:

ANSI/BIFMA X5.1-2011

Arm fatigue test EN 1728:2012

Arm sideways static load test EN 1728:2012

Information for use EN 16139:2013

Leg sideways static load test EN 1728:2012

Seat and back fatigue test EN 1728:2012

Seat front edge durability test EN 1728:2012

Stability EN 1022:2005

Arm downwards static load test EN1728:2012

Arm rest impact test EN 1728:2012

Back impact test EN 1728:2012

Leg forward static load test EN 1728:2012

Safety requirements EN 16139:2013

Seat and back static load test EN 1728:2012

Seat impact test EN 1728:2012

Vertical load on back rest EN 1728:2012