


BIC B25-B50-B60-B120



Code	©	K°	lm	Watt	lm/W	CRI	■	IP	L1	L2	H
BC2.63LXX	700m/A led	3000	2030	17,0	121	85	104°	44	25,1	9,6	14,6
Cassaforma per cartongesso . Housing for plasterboard											
ZOB.025.01	■										
BC5.63LXX	700m/A led	3000	3090	25,6	120	85	104°	44	50,1	9,6	14,6
BC5.93LXX	700m/A led	3000	3090	25,6	120	85	104°	44	50,1	9,6	15,9
Cassaforma per cartongesso . Housing for plasterboard											
ZOB.050.01	■										
BC6.63LXX	700m/A led	3000	4120	34,2	120	85	104°	44	60,1	9,6	14,6
BC6.93LXX	700m/A led	3000	4120	34,2	120	85	104°	44	60,1	9,6	15,9
Cassaforma per cartongesso . Housing for plasterboard											
ZOB.060.01	■										
BC12.63LXX	700m/A led	3000	8240	68,4	120	85	104°	44	120,1	9,6	14,9
Cassaforma per cartongesso . Housing for plasterboard											
ZOB.120.01	■										

.93L = Con unità emergenza • With integral emergency lighting unit • Mit Notlichteinrichtung • Avec système de secours • Con unidad de emergencia

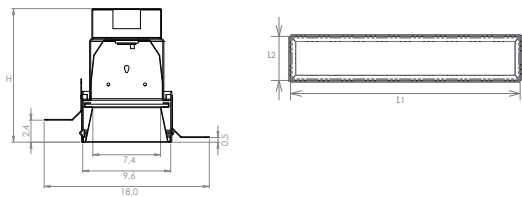