

DIADEMA

Marco Pagnoncelli - 2015

Collezione dal design ricercato realizzata in alluminio da 6 mm di spessore.

La ricerca dei profili smussati conferiscono originalità e unicità al prodotto.

Illuminazione indiretta ad alta luminosità ed efficienza a cobled 220V di ultima generazione che non necessitano di alimentatore.

Disponibile nella temperatura colore LED 3000 °K e 2700 °K.

Classe energetica A++, A+, A

Modello depositato



A collection of refined design made by only 6mm thick aluminium.


The research of smooth profiles is giving originality and uniqueness to this fitting.

The high efficiency indirect lighting is given by 220V last generation cobled, no driver needed.

Available with 3000 °K or 2700 °K LED colour temperature.


Energy class A++, A+, A

Registered design

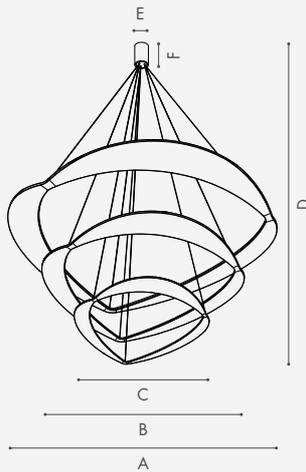

169

KIT FISSAGGIO
MAGGIORATO



COD. **OP.2**

DIADEMA 3D = DECENTRATO

Art.	W	V	Lumen	°K led	A cm	B cm	C cm	D cm	E cm	F cm
DIADEMA 3D	195	220	16575	3000	Ø90	Ø70	Ø50	200	Ø3	10
DIADEMA 3	195	220	16575	3000	Ø90	Ø70	Ø50	200	Ø6	10

LED Disponibili a richiesta nella temperatura colore 2700 °K

LED
220V CRI90