

SPILLO

Marco Pagnoncelli - 2012



Lampada da parete e soffitto a doppia asta orientabile realizzata in trafilata di ottone sezione 7x7 mm.

Disponibile in varie altezze e diverse potenze.

Illuminazione a microstriscia LED ad alta efficienza luminosa.

Completa di alimentatore.

Finiture colore: verniciato bianco (BI), verniciato nero (NE), bianco+cromo (BI+CR), oro opaco (OR).

Classe energetica A++, A+, A

Modello depositato

Wall and ceiling lamp with double adjustable drawn brass rod, 7x7 mm section.


Available in various dimensions and power levels.

Lighting by high luminous efficiency LED micro-strip.

Complete with power supply unit. Available in: white varnish (BI), black varnish (NE), white+chrome (BI+CR), brushed gold (OR).

Energy class A++, A+, A

Registered design

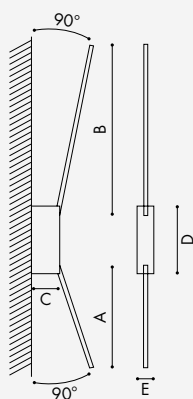

Art.	W	V	Lumen	°K led	A cm	B cm	C cm	D cm	E cm
SPILLO2.40	7,44	220	660	3000	20	40	6	12	3,2
SPILLO2.60	11,88	220	990	3000	30	60	6	19	3,2
SPILLO2.80	15,36	220	1320	3000	40	80	6	19	3,2

LED Disponibili a richiesta nella temperatura colore 2700 °K

**LED
12V CRI90**

