

# SPILLO

Marco Pagnoncelli - 2012

Lampada da soffitto ad incasso con 3 o 5 aste orientabili realizzata in trafilata di ottone sezione 7x7 mm. Disponibile in varie misure e diverse potenze. Illuminazione con microstriscia LED ad alta efficienza luminosa.

**Necessita di alimentatore e controcassa, non inclusi.\***

Finiture colore: verniciato bianco (BI), verniciato nero (NE), cromo (CR), oro opaco (OR).

**Alimentatori, controcasse e specifiche tecniche a pag. 38-39.**

Classe energetica A++, A+, A

Modello depositato

Built-in ceiling lamp with 3 or 5 adjustable drawn brass rods, 7x7 mm section. Available in various dimensions and power levels. Lighting by high luminous efficiency LED micro-strip.


**Requires power supply unit and wall housing, which is not included.\***

Available in: white varnish (BI), black varnish (NE), chrome (CR), brushed gold (OR).

**Power supply units, wall housings and technical specifications on page 38-39.**

Energy class A++, A+, A

Registered design

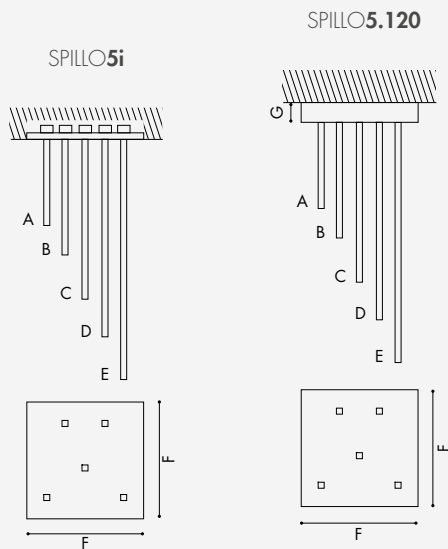

| Art.        | W     | V  | Lumen | °K led | A cm | B cm | C cm | D cm | E cm | F cm | ∅7 cm | LED       |
|-------------|-------|----|-------|--------|------|------|------|------|------|------|-------|-----------|
| SPILLO5i    | 45,72 | 12 | 3850  | 3000   | 40   | 50   | 60   | 80   | 100  | 23   | 28x28 | 12V CRI90 |
| SPILLO5.120 | 45,72 | 12 | 3850  | 3000   | 40   | 50   | 60   | 80   | 100  | 25   | 3     |           |

**LED Disponibili a richiesta nella temperatura colore 2700 °K**