



ALABAMA PENDANT

PRODUCT SHEET



REF. 10158

FEATURES

IP: 33

Installation: Pendant

High: 114 mm

Light Direction: Fixed

Minimum distance to lightened objects: 0.5 m

Lamps : LED /T5 */ T5 - TC-L */TC-L *

Protection class: Class I

Maximum cable length: 3000 mm

Indirect light: Optional

* not included

LED MODULES

STANDARD POWER - HIGH POWER

Efficiency 3K: 132 lm/W

Efficiency 4K: 136 lm/W

Energy efficiency : A++

Driver: Included


Life time: 50.000h

LED working constant current: 350mA


Color rendering current: CRI ≥80

LED Guarantee: 5 years

MEASURES

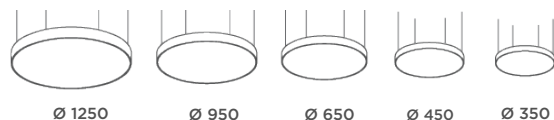


FINISH

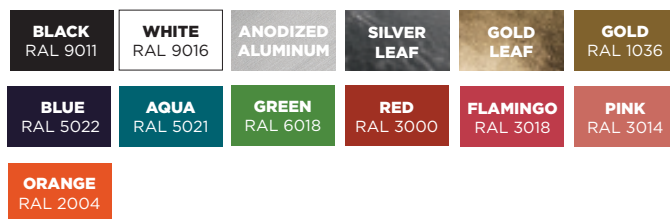

OPTIC COVER



☐ OPAL




☐ MICROPRISMATIC

DIMMABLE OPTIONS

☐ 1.10V

☐ PUSH

☐ DALI

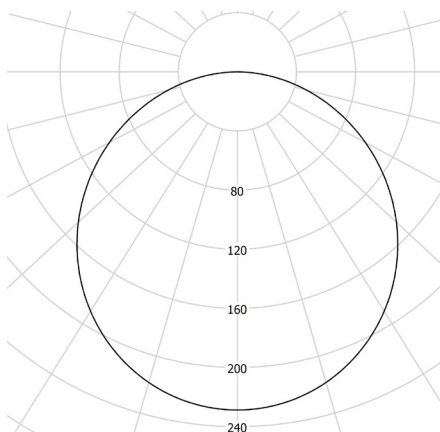



Date: _____

Company: _____

Project: _____

Quantity: _____

Features: _____



Partida Madrigueres Sud 11
03700 DENIA (Alicante) SPAIN
TEL.0034-965 781 218

www.bpmlighting.com