



ALABAMA SURFACE

PRODUCT SHEET



REF. 10158

FEATURES

IP: 33

Installation: Surface

High: 114 mm

Light Direction: Fixed

Minimum distance to lighted objects: 0.5 m

Lamps : LED /T5 */ T5 - TC-L */TCL *

Protection class: Class I

Indirect light: Optional

* not included

LED MODULES

STANDARD POWER - HIGH POWER

Efficiency 3K: 132 lm/W

Efficiency 4K: 136 lm/W

Energy efficiency : A++

Driver: Included


Life time: 50.000h

LED working constant current: 350mA

Color rendering current: CRI ≥80

LED Guarantee: 5 years

MEASURES



FINISH

BLACK RAL 9011	WHITE RAL 9016	SILVER LEAF	GOLD LEAF	GOLD RAL 1036	ORANGE RAL 2004
BLUE RAL 5022	AQUA RAL 5021	GREEN RAL 6018	RED RAL 3000	FLAMINGO RAL 3018	PINK RAL 3014

OPTIC COVER



☐ OPAL

☐ ICE


☐ MICROPRISMATIC

DIMMABLE OPTIONS

☐ 1.10V

☐ PUSH

☐ DALI

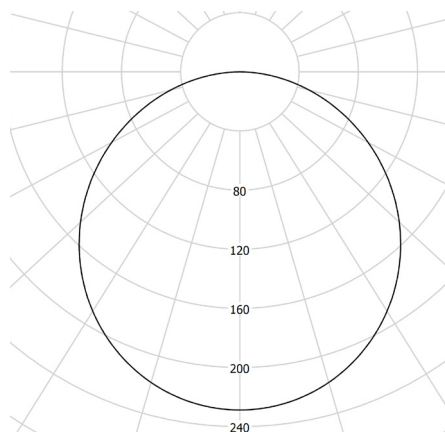



Date: _____

Company: _____

Project: _____

Quantity: _____

Features: _____



Partida Madrigueres Sud 11
03700 DENIA (Alicante) SPAIN
TEL.0034-965 781 218

www.bpmlighting.com