



# ALABAMA S-LIGHT PENDANT

PRODUCT SHEET



REF. 10192

## FEATURES

- IP: 33
- Installation: Pendant
- High: 80 mm
- Light Direction: Fixed
- Minimum distance to lightened objects: 0.5 m
- Lamps : LED
- Protection class: Class I
- Maximum cable length: 3000 mm


## LED MODULES

- Energy efficiency : A+
- Driver: Included
- Life time: 50.000h
- LED working constant current: 700mA
- Color rendering current: CRI ≥80
- LED Guarantee: 5 years

REF		3000K/4000K
10192.07		12 W 1680/1760 lm
10192.08		27,4 W 2940/3000 lm
10192.09		45,6 W 4900/5000 lm
10192.10		109,2 W 11760/12000 lm

REF		3000K/4000K
10192.11		200,2 W 21560/22000 lm
10192.12		318,6 W 34300/34000 lm

## FINISH

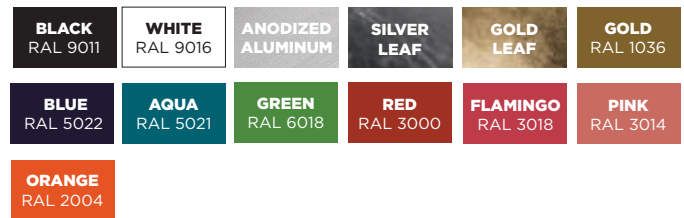

## OPTIC COVER



- OPAL
- MICROPRISMATIC

## DIMMABLE OPTIONS

- 1.10V
- PUSH
- DALI





Date: \_\_\_\_\_

Company: \_\_\_\_\_

Project: \_\_\_\_\_

Quantity: \_\_\_\_\_

Features: \_\_\_\_\_

\_\_\_\_\_



Partida Madrigueres Sud 11  
03700 DENIA (Alicante) SPAIN  
TEL.0034-965 781 218

[www.bpmlighting.com](http://www.bpmlighting.com)