




ALABAMA S-LIGHT

PRODUCT SHEET



REF. 10192

FEATURES


- IP: 33
- Installation: Surface
- High: 80 mm
- Light Direction: Fixed
- Minimum distance to lightened objects: 0.5 m
- Lamps : LED
- Protection class: Class I
- Indirect light: Optional
- * not included

LED MODULES


- Energy efficiency : A+
- Driver: Included
- Life time: 50.000h
- LED working constant current: 700mA
- Color rendering current: CRI ≥80
- LED Guarantee: 5 years

REF	3000K/4000K
10192.01 20 W 1680/1760 lm	
10192.02 27,4 W 2940/3000 lm	
10192.03 45,6 W 4900/5000 lm	
10192.04 109,2 W 11760/12000 lm	
10192.05 200,2 W 21560/22000 lm	
10192.06 318,6 W 34300/35000 lm	


FINISH

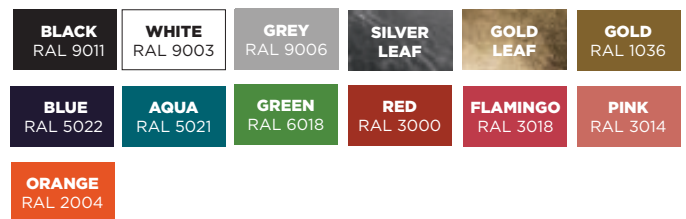

OPTIC COVER



OPAL



MICROPRISMATIC

DIMMABLE OPTIONS


1.10V

PUSH

DALI

OPTIONAL

Distance from lighting item to ceiling in indirect light option





Date: _____

Company: _____

Project: _____

Quantity: _____

Features: _____



Partida Madrigueres Sud 11
03700 DENIA (Alicante) SPAIN
TEL.0034-965 781 218

www.bpmlighting.com