





# ALABAMA S-LIGHT

## PRODUCT SHEET

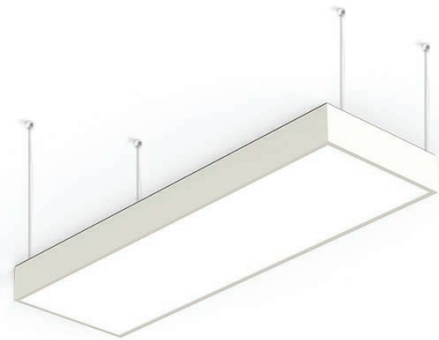

REF. 10194

### FEATURES

IP: 33

Installation: Surface

High: 80 mm

Light Direction: Fixed

Minimum distance to lightened objects: 0.5 m

Lamps : LED

Protection class: Class I

Maximum cable length: 3000 mm

Indirect light: Optional

### LED MODULES

Energy efficiency : A+

Driver: Included

Life time: 50.000h


LED working constant current: 700mA

Color rendering current: CRI ≥80


LED Guarantee: 5 years

REF		3000K/4000K
10194.15		36,4 W 3920/4000 lm
10194.16		54,6 W 5880/6000 lm
10194.17		72,8 W 7840/8000 lm
10194.18		91 W 9800/10000 lm


### FINISH

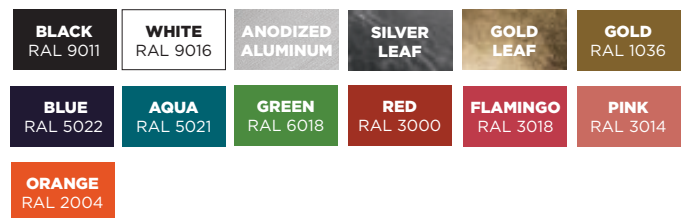

### OPTIC COVER



OPAL



MICROPRISMATIC

### DIMMABLE OPTIONS

1.10V

PUSH

DALI



Date: \_\_\_\_\_

Company: \_\_\_\_\_

Project: \_\_\_\_\_

Quantity: \_\_\_\_\_

Features: \_\_\_\_\_

\_\_\_\_\_



Partida Madrigueres Sud 11  
03700 DENIA (Alicante) SPAIN  
TEL.0034-965 781 218

[www.bpmlighting.com](http://www.bpmlighting.com)