


[LED MODULES](#)

Name	ALBA SR
Reference	10160.SR.W.MP
Optic Cover	Microprismatic
Finish	White



Utilization	Indoor use only
Min. Distance	0.5 m
CRI	80
Equipment	Included
Life time	50.000h
Led working constant current	350 mA
Energy efficiency	A++
Efficiency 4000K	136 lm/W
Efficiency 3000K	132 lm/W
Indirect light	Optional
Light direction	Fixed
High	64 mm
Width	
Protection class	Class I
Ingress Protection Rating	IP43
Installation	Surface

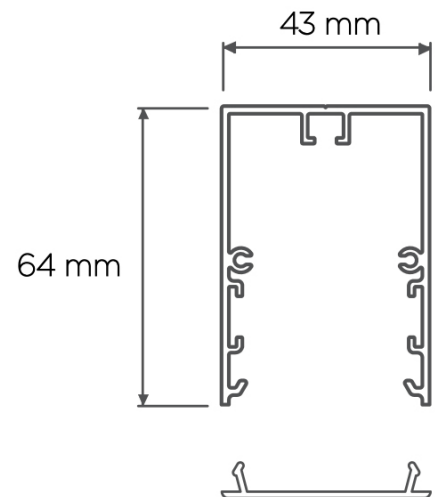

BPM Lighting ALBA


The luminaire contains built-in LED lamps.

A+
A+
A
B
C
D
E
F

LED

The LED-lamps cannot be changed in the luminaire.

874/2012

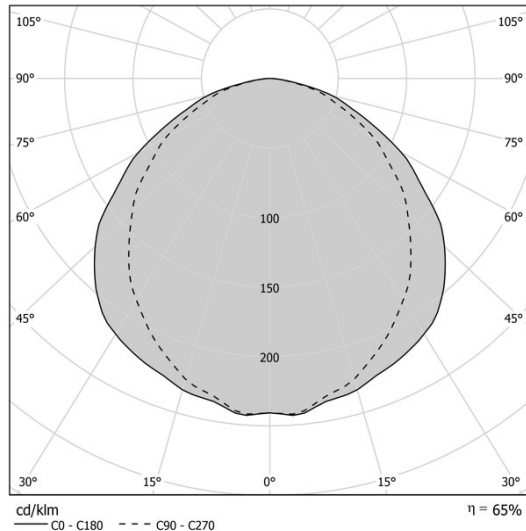


Separación [m]	Diámetro cónico [m]	E(0°)	E(C90)	E(C0)	Intensidad lumínica [lx]
0.5	1.26 1.63	789	51.5° 96	58.4° 57	
1.0	2.51 3.25	197	51.5° 24	58.4° 14	
1.5	3.77 4.88	88	51.5° 11	58.4° 6	
2.0	5.03 6.50	49	51.5° 6	58.4° 4	
2.5	6.29 8.13	32	51.5° 4	58.4° 2	
3.0	7.54 9.75	22	51.5° 3	58.4° 2	

Separación [m] Diámetro cónico [m]

— C0 - C180 (Semiángulo de dispersión: 116.8°)


— C90 - C270 (Semiángulo de dispersión: 103.0°)

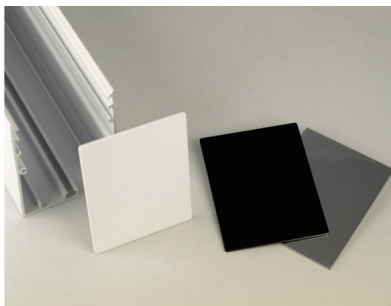


Kit Tapas



Led Tridonic

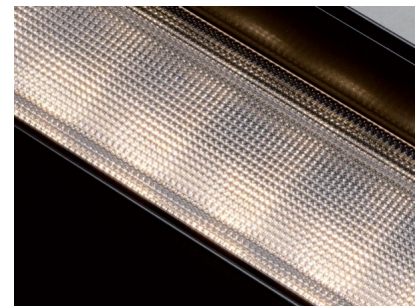

Microprismatic

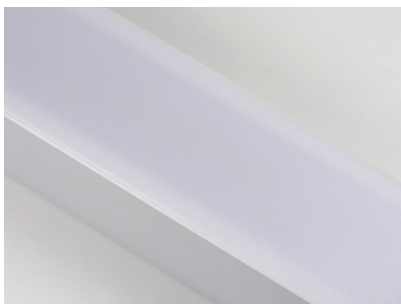

Opal



Ice



Suspension cable