





# ALTAIR S-LIGHT

PRODUCT SHEET

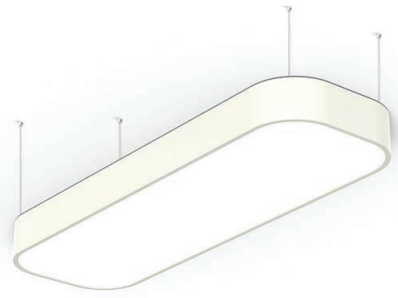

REF. 10199

## FEATURES


- IP:** 33
- Installation:** Pendant
- High:** 80 mm
- Light Direction:** Fixed
- Minimum distance to lightened objects:** 0.5 m
- Lamps :** LED
- Protection class:** Class I
- Maximum cable length:** 3000 mm
- Indirect light:** Optional

## LED MODULES

- Energy efficiency :** A+
- Driver:** Included
- Life time:** 50.000h
- LED working constant current:** 700mA
- Color rendering current:** CRI ≥80
- LED Guarantee:** 5 years

REF		3000K/4000K
10199.15		36,4 W 3920/4000 lm
10199.16		54,6 W 5880/6000 lm
10199.17		72,8 W 7840/8000 lm
10199.18		91 W 9800/10000 lm

## FINISH

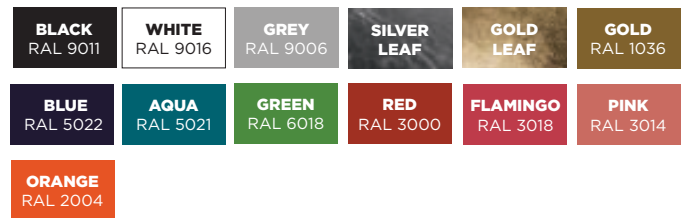

## OPTIC COVER



- OPAL
- MICROPRISMATIC

## DIMMABLE OPTIONS

- 1.10V
- PUSH
- DALI





Date: \_\_\_\_\_

Company: \_\_\_\_\_

Project: \_\_\_\_\_

Quantity: \_\_\_\_\_

Features: \_\_\_\_\_

\_\_\_\_\_



Partida Madrigueres Sud 11  
03700 DENIA (Alicante) SPAIN  
TEL.0034-965 781 218

[www.bpmlighting.com](http://www.bpmlighting.com)