





REF. 10190

## FEATURES


- IP:** 33
- Installation:** Pendant
- High:** 114 mm
- Light Direction:** Fixed
- Minimum distance to lightened objects:** 0,5 m
- Lamps :** LED
- Protection class:** Class I
- Maximum cable length:** 3000 mm
- Indirect light:** Optional

## LED MODULES


- Energy efficiency :** A+
- Driver:** Included
- Life time:** 50.000h
- LED working constant current:** 700mA
- Color rendering current:** CRI >80
- LED Guarantee:** 5 years

RFF		3000K/40COK
10190.05		49,0 W 4900/5000 lm
10190.06		109,2 W 1750/17000 lm
10190.07		200,2 W 21560/22000 lm
10190.08		328,6 W 3430 /3500 lm


## FINISH

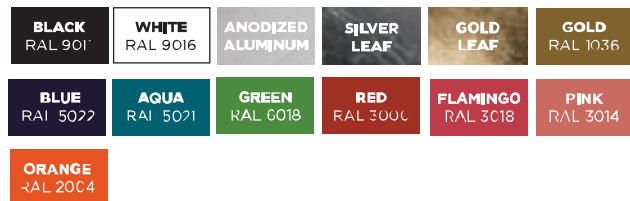

## OPTIC COVER



OPAL



MICROPRISMATIC

## DIMMABLE OPTIONS

1.10V

PUSH

DALI





Date: \_\_\_\_\_  
Company: \_\_\_\_\_  
Project: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Features: \_\_\_\_\_  
\_\_\_\_\_



Partida Madrigueres Sud 11  
03700 DENIA (Alicante) SPAIN  
TEL.0034-965 781 218

[www.bpmlighting.com](http://www.bpmlighting.com)