




KOL ORACLE

PRODUCT SHEET



REF. 20085.01

FEATURES

IP: 23

Installation: Surface

Light Direction: Tilting & Orientable

Minimum distance to lightened objects: 0.5 m

Protection class: Class II

LED

Power: 23,6W

Efficiency 3K: 96 lm/W

Efficiency 4K: 101 lm/W

Driver: Included

Life time: 50.000h

LED working constant current: 700mA

Color rendering current: CRI ≥80

LED Guarantee: 5 years

FINISH




REFLECTOR

- 40° 60°

DIMMABLE OPTIONS

- 1.10V PUSH DALI

MEASURES

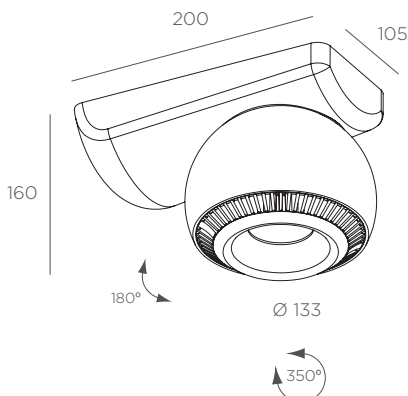

Date: _____

Company: _____

Project: _____

Quantity: _____

Features: _____



Partida Madrigueres Sud 11
03700 DENIA (Alicante) SPAIN
TEL.0034-965 781 218

www.bpmlighting.com