



LUK FREIR

PRODUCT SHEET



20017



20016



20015



REF. 20015 - 20016 - 20017

FEATURES

IP: 23

Installation: Surface

High: 130 mm

Light Direction: Orientable

Minimum distance to lightened objects: 0.5 m

Lamps : LED

Protection class: Class II

FINISH



REFLECTOR

- 40° 60°

DIMMABLE OPTIONS

- 1.10V PUSH DALI PHASE CUT

LED

Power: 16,3W

Efficiency 3K: 104,29 lm/W

Efficiency 4K: 109,89 lm/W

Energy efficiency : A+

Driver: Included


Life time: 50.000h

LED working constant current: 500mA

Color rendering current: CRI ≥80

LED Guarantee: 5 years

MEASURES

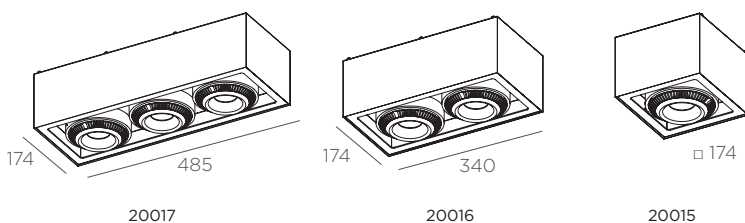



Date: _____

Company: _____

Project: _____

Quantity: _____

Features: _____



Partida Madrigueres Sud 11
03700 DENIA (Alicante) SPAIN
TEL.0034-965 781 218

www.bpmlighting.com