



# ORACLE

PRODUCT SHEET



REF. 20087.02

## FEATURES

IP: 23

Installation: Surface

Light Direction: Orientable & Tilting

Minimum distance to lightened objects: 0.5 m

Protection class: Class II

## LED

Power: 16W

Efficiency 3K: 106 lm/W

Efficiency 4K: 112 lm/W

Driver: Included


Life time: 50.000h

LED working constant current: 500mA

Color rendering current: CRI ≥80

LED Guarantee: 5 years

## MEASURES

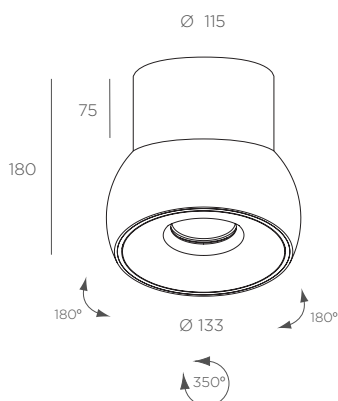

## FINISH

<b>BLACK</b> RAL 9011	<b>WHITE</b> RAL 9016
--------------------------	--------------------------

## CENTRAL FINISH

<b>BLACK</b> RAL 9011	<b>WHITE</b> RAL 9016	<b>GOLD</b> RAL 1036	<b>ORANGE</b> RAL 2004	<b>BLUE</b> RAL 5022
<b>AQUA</b> RAL 5021	<b>GREEN</b> RAL 6018	<b>RED</b> RAL 3000	<b>FLAMINGO</b> RAL 3018	<b>PINK</b> RAL 3014

## REFLECTOR

- 40°
- 60°

## DIMMABLE OPTIONS

- 1.10V
- PUSH
- DALI
- PHASE CUT



Date: \_\_\_\_\_

Company: \_\_\_\_\_

Project: \_\_\_\_\_

Quantity: \_\_\_\_\_

Features: \_\_\_\_\_

\_\_\_\_\_



Partida Madrigueres Sud 11  
03700 DENIA (Alicante) SPAIN  
TEL.0034-965 781 218

[www.bpmlighting.com](http://www.bpmlighting.com)