




WING SURFACE

PRODUCT SHEET

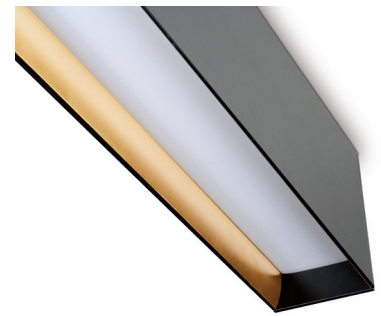

REF. 10200.SR

FEATURES

IP: 43

Installation: Surface

High: 85 mm

Light Direction: Fixed

Minimum distance to lightened objects: 0.5 m

Lamps : LED

Protection class: Class I

Indirect light: Optional

LED MODULES

STANDARD POWER - HIGH POWER

Efficiency 3K: 132 lm/W

Efficiency 4K: 136 lm/W

Energy efficiency : A++

Driver: Included


Life time: 50.000h

LED working constant current: 350mA

Color rendering current: CRI ≥80

LED Guarantee: 5 years

MEASURES

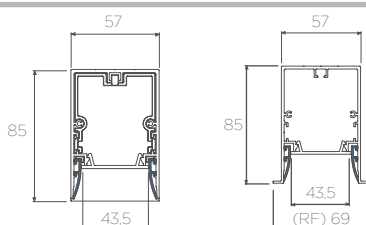

FINISH



CENTRAL FINISH



OPTIC COVER



OPAL

ICE

MICROPRISMATIC

DIMMABLE OPTIONS

1.10V

PUSH

DALI

COVER KIT
CK14
2x1,5mm





Date: _____

Company: _____

Project: _____

Quantity: _____

Features: _____



Partida Madrigueres Sud 11
03700 DENIA (Alicante) SPAIN
TEL.0034-965 781 218

www.bpmlighting.com