


Tinkering

JOOST VAN BLEISWIJK | POWERED THROUGH ELECTROSANDWICH® BY MARCEL WANDERS

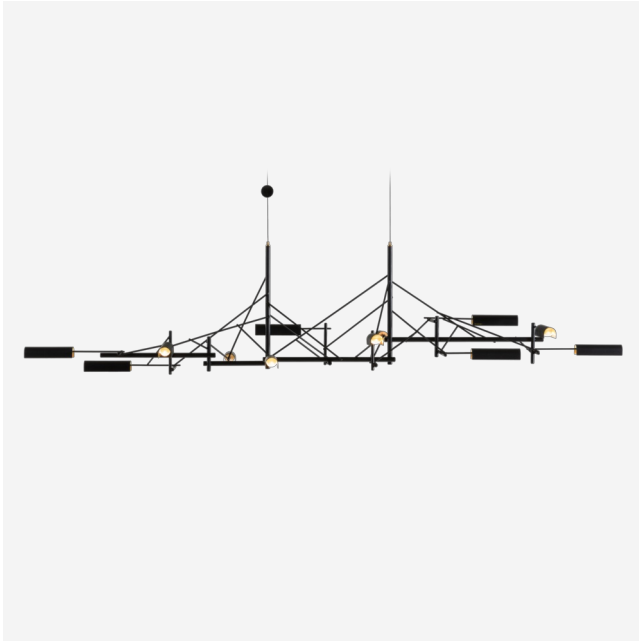

Tinkering, designed by Joost van Bleiswijk, was created after a long search for unusual ways of capturing and reflecting light. Joost spent hours composing rhythmic installations and it was in his workshop where this symbol of sophisticated craftsmanship and creative luxury unfolded.

Detailing



Powered through Electrosandwich® technology and made from coated stainless steel and brass, Tinkering creates a modern feel with a detailed touch.


Colours



Black

Tinkering 140

Dimensions

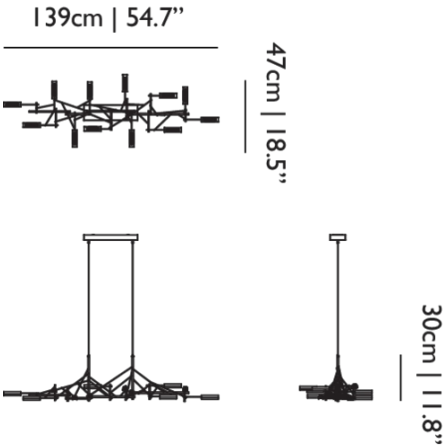

Product

WIDTH 139cm | 54.7"
HEIGHT 30cm | 11.8"
DEPTH 47cm | 18.5"
WEIGHT NETTO 2.7kg | 5.95lbs

Packaging

WIDTH 59cm | 23.2"
HEIGHT 41cm | 16.1"
CUBAGE 0.37m³ | 12.9ft³
LENGTH 151cm | 59.4"
WEIGHT 8.5cm | 18.74lbs

Technical CE

MATERIAL
Metal frame, brass shades and plastic (PC) diffusers.

ENERGY LABEL
Energy Label B

LIGHTSOURCE TYPE
LED

NUMBER OF LIGHTSOURCES
12

INPUT VOLTAGE
220-240

MAX POWER CONSUMPTION
21W

LAMPHOLDER
LED (Solid state)

CABLE LENGTH
250cm | 98.4"

COLOUR TEMPERATUE
2700 K

LIGHT DIRECTION
All directions

EEI
0.35

MEASURED POWER CONSUMPTION
20.5W

INSTALLATION REQUIRED
Yes

LIGHTSOURCE INCLUDED
Yes

SHAPE
Linear

FREQUENCY
50/60

DIMMABLE
Yes

COLOUR
Black

CANOPY
Matching metal rectangle

CRI
93

LIGHT OUTPUT
742 lm

EFFICIENCY
35.33 lm/W

Technical cULus

MATERIAL

Metal frame, brass shades and plastic (PC) diffusers.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

12

INPUT VOLTAGE

110-130

MAX POWER CONSUMPTION

21W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

250cm | 98.4"

COLOUR TEMPERATUE

2700 K

LIGHT DIRECTION

All directions

EEI

0.35

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

DIMMABLE

Yes

COLOUR

Black

CANOPY

Matching metal rectangle

CRI

93

LIGHT OUTPUT


742 lm

EFFICIENCY

35.33 lm/W

Tinkering 85

Dimensions

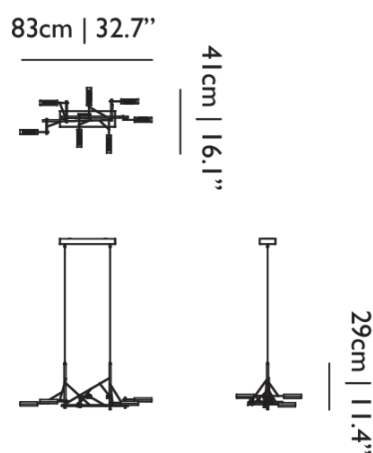

Product

WIDTH 83cm | 32.7"
HEIGHT 29cm | 11.4"
DEPTH 41cm | 16.1"
WEIGHT NETTO 1.6kg | 3.53lbs

Packaging

WIDTH 52cm | 20.5"
HEIGHT 43cm | 16.9"
CUBAGE 0.21m³ | 7.42ft³
LENGTH 94cm | 37"
WEIGHT 6.5cm | 14.33lbs

Technical CE

MATERIAL

Metal frame, brass shades and plastic (PC) diffusers.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

7

INPUT VOLTAGE

220-240

MAX POWER CONSUMPTION

12W

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

250cm | 98,4"

COLOUR TEMPERATUE

2700 K

LIGHT DIRECTION

All directions

EEI

0.3

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

DIMMABLE

Yes

COLOUR

Black

CANOPY

Matching metal rectangle

CRI

93

LIGHT OUTPUT

433 lm

EFFICIENCY

36.08 lm/W

Technical cULus

MATERIAL

Metal frame, brass shades and plastic (PC) diffusers.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

7

INPUT VOLTAGE

110-130

MAX POWER CONSUMPTION

12W

INSTALLATION REQUIRED

Yes

LIGHTSOURCE INCLUDED

Yes

SHAPE

Linear

FREQUENCY

50/60

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

CABLE LENGTH

250cm | 98,4"

COLOUR TEMPERATURE

2700 K

LIGHT DIRECTION

All directions

EEI

0.3

MEASURED POWER CONSUMPTION

12.5W

COLOUR

Black

CANOPY

Matching metal rectangle

CRI

93

LIGHT OUTPUT

433 lm

EFFICIENCY

36.08 lm/W

Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.

DIMMER TYPE

Mains dimmable (trailing edge / reverse phase)

LOAD TYPE

Capacitive load (C-Type)