


ZIRKOL – L

ZIRKOL – L is a family of linear suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen to a homogeneous lighting. CRI > 90

Light emission can be direct light and double light emission with high flux and different colour temperatures. Remote driver and dimmer interface included.

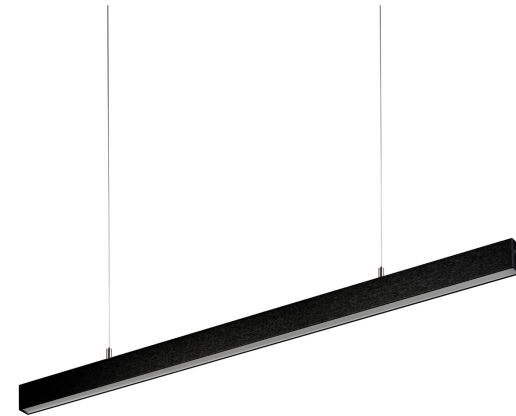

1M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	833lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLEDO20/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	1.2 kg

Codes

BZRKL1610G15DBO
BZRKL1610G15DNE
BZRKL1610G15DOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 100x2,6x5 cm / Gross weight: 1.25 kg

Certificazioni

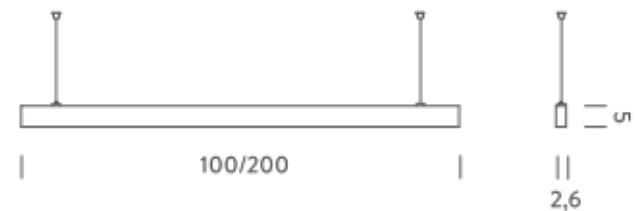

1M | UP - DOWNLIGHT -2700K

LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	1666lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminum
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	1.2 kg

Codes

BZRL1710G15DBO
BZRL1710G15DNE
BZRL1710G15DOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 100x2,6x5 cm / Gross weight: 1.25 kg

Certificazioni

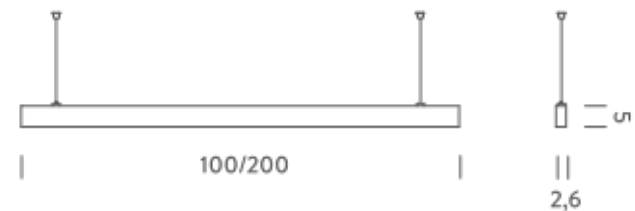

1M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	882lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLEDO20/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	1,2 kg

Codes

BZRL1610G15WOB
BZRL1610G15WNE
BZRL1610G15WOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 100x2,6x5 cm / Gross weight: 1,25 kg

Certificazioni

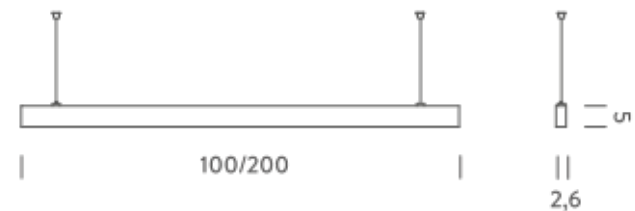

1M | UP - DOWNLIGHT -3000K

LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	1764lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	1,2 kg

Codes

BZRL1710G15WBO
BZRL1710G15WNE
BZRL1710G15WOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 100x2,6x5 cm / Gross weight: 1,25 kg

Certificazioni

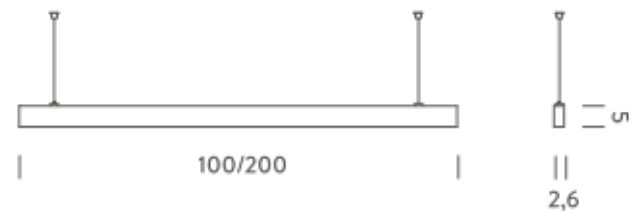

1M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	14,5W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	980lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIMLEDO20/24, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	1,2 kg

Codes

BZRL1610G15NBO
BZRL1610G15NNE
BZRL1610G15NOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 100x2,6x5 cm / Gross weight: 1,25 kg

Certificazioni

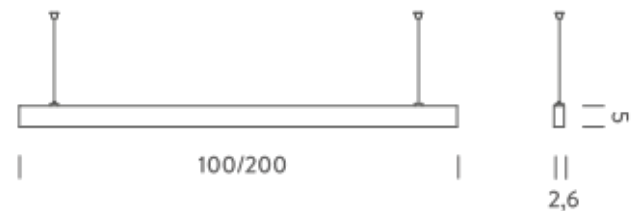

1M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	1960lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	100x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	1,2 kg

Codes

BZRL1710G15NBO
BZRL1710G15NNE
BZRL1710G15NNE


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

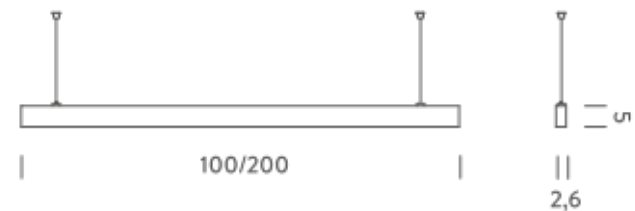

2M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	1666lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	2,4 kg

Codes

BZRL1620G15DBO
BZRL1620G15DNE
BZRL1620G15DOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

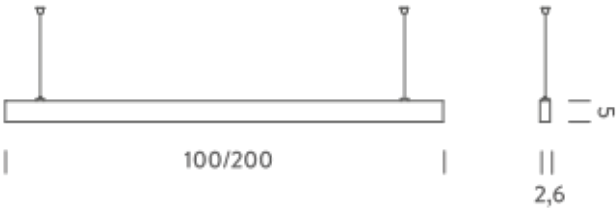

2M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	58W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	2700K
Luminous flux	3332lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminum
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	2,4 kg

Codes

BZRL1720G15DBO
BZRL1720G15DNE
BZRL1720G15DOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

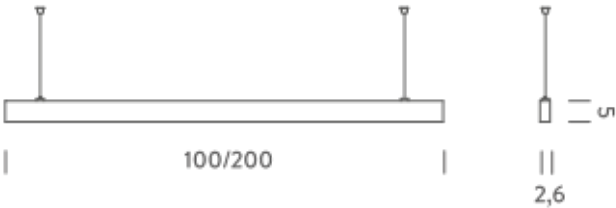

2M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	1764lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	2,4 kg

Codes

BZRL1620G15WBO
BZRL1620G15WNE
BZRL1620G15WOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

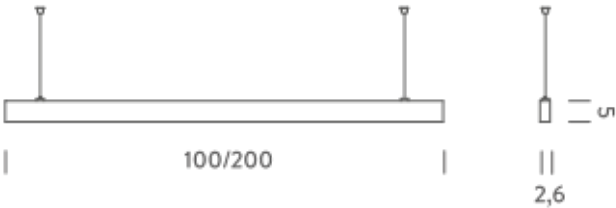

2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	58W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	3000K
Luminous flux	3528lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	2,4 kg

Codes

BZRL1720G15WBO
BZRL1720G15WNE
BZRL1720G15WOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

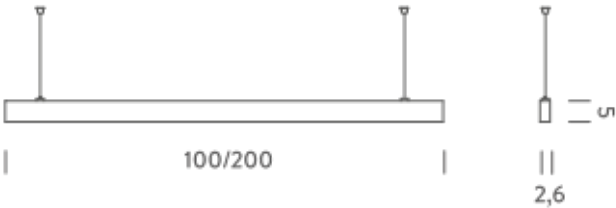

2M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	29W
Emission	Diffused orientable
Switching	DALI 1-100%
Tension	220/240V
Color temperature	4000K
Luminous flux	1960lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Customization options	Shapes, sizes
Net lamp weight	2,4 kg

Codes

BZRL1620G15NBO
BZRL1620G15NNE
BZRL1620G15NOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

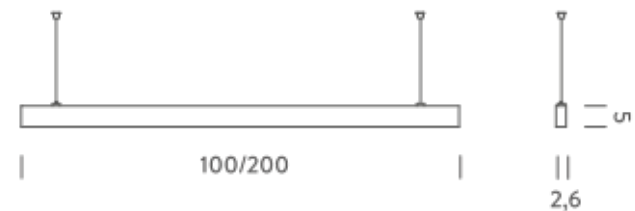

2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	58W
Emission	Diffused orientable
Switching	DALI 1-100V
Tension	220/240V
Color temperature	4000K
Luminous flux	3920lm
Typ CRI	90
Energy class	A+
IP class	40
Dimensions	200x2,6x5cm
Materials	Aluminium
Notes	included: 1 driver WALIM60W24VIN, 1 dimmer interface WDIMDALIHP, 1 electrical cable length 5m, 2x adjustable metal cables length 3m (including ceiling attachment). Shipped assembled
Net lamp weight	2,4 kg

Codes

BZRL1720G15NBO
BZRL1720G15NNE
BZRL1720G15NOR

Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 200x2,6x5 cm / Gross weight: 2,55 kg

Certificazioni

