



GRACE

Medium Cylinder


FEATURES

- Frame:** Metal
Diffuser: Resin
Dimmable: Yes
Dimmer: Not Included
Bulb: Not Included

BULB

- E27 Classic A60** 3 x max 46W eco
 or _____
E27 CFL [compact] 3 x max 23W
 or _____
E27 LED 3 x max available

SPECIFICATION SHEET




CERTIFICATION



PHOTOMETRIC CURVE

DIAGRAMMA POLARE (cd/klm)

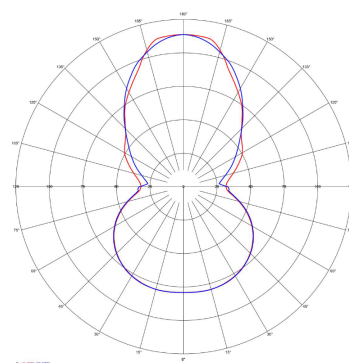

Codice CIE: 20 00 BA 62 00
 Rendimento: LOR = 69.0, DALI = 62.2, ULOR = 47.8
 Apertura base: 100° x 124.0° x 124.0° x 124.0°
 Asimmetria: Max = 115.7 cd/klm, C = 0.0°, gamma = 180.0°
 Orientamento: 0° = Indicazione, 0° = Rotazione 0°

FRAME	DIFFUSER	LED COLOUR	CODE
Matt White 9010	Cocoon	Optionally	143003



GRACE

Large Cylinder

FEATURES

Frame: Metal

Diffuser: Resin

Dimmable: Yes

Dimmer: Not Included

Bulb: Not Included

BULB

 **E27 Classic A60** 3 x max 46W eco


or

 **E27 CFL** 3 x max 30W

or

 **E27 LED** 3 x max available

SPECIFICATION SHEET

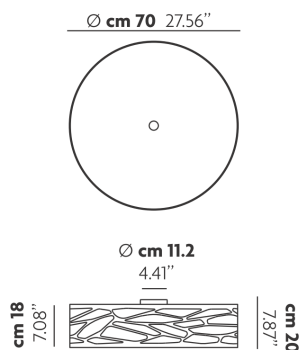

CERTIFICATION



PHOTOMETRIC CURVE

None

FRAME	DIFFUSER	LED COLOUR	CODE
 Matt White 9010	 Cocoon	Optionally	143002



GRACE

Medium Square

FEATURES

- Frame:** Metal
- Diffuser:** Resin
- Dimmable:** Yes
- Dimmer:** Not Included
- Bulb:** Not Included


BULB

 **E27 CFL [compact]** 4 x max 23W

or

 **E27 LED** 4 x max available

SPECIFICATION SHEET




CERTIFICATION




PHOTOMETRIC CURVE

DIAGRAMMA POLARE (cd/klm)

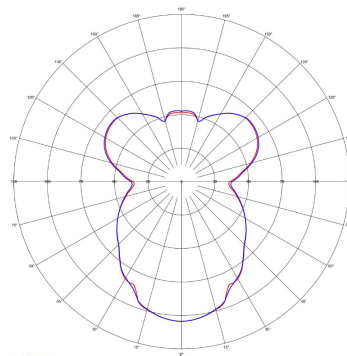

Codice CIE: 90 12 82 40 75
 Rendimento: L80 = 74.8, L70 = 68.6, L60 = 59.6
 Apertura beam: C0 = 180°, C1 = 150°, C2 = 120°, C3 = 90°
 Asimmetria: Max = 104.5 cd/klm, C = 0.0°, gamma = 0.0°
 Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°

FRAME	DIFFUSER	LED COLOUR	CODE
 Matt White 9010	 Cocoon	Optionally	143012

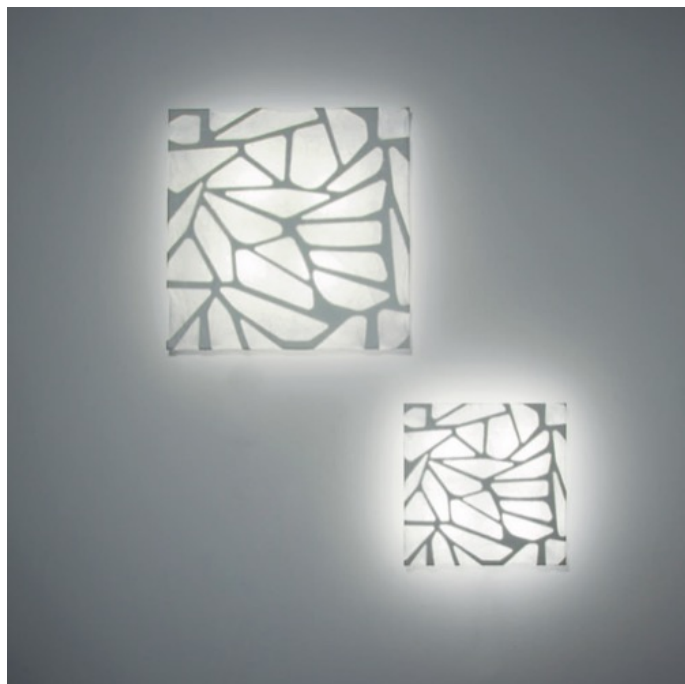

GRACE

Large Square

FEATURES

- Frame:** Metal
- Diffuser:** Resin
- Dimmable:** Yes
- Dimmer:** Not Included
- Bulb:** Not Included


BULB

 **E27 CFL [compact]** 4 x max 23W

or

 **E27 LED** 4 x max available

SPECIFICATION SHEET



CERTIFICATION



PHOTOMETRIC CURVE

None

FRAME	DIFFUSER	LED COLOUR	CODE
 Matt White 9010	 Cocoon	Optionally	143011

GRACE AP3-PL3-AP2-PL2

Wall & Ceiling | Medium & Large Square

220-240V 50/60 Hz



L max cm 12

4x max 18W CFL compact (E27)




L max cm 12

4x max Classic A60 LED (E27)

Disinserire la tensione prima di operare sull'apparecchio

ISTRUZIONI DI MONTAGGIO

- 1) Svitare le due viti [P] sul bordo del diffusore [D] e rimuoverlo sollevandolo per sganciare i perni [M] (vedi Fig.1 e Fig.2).
- 2) Svitare i dadi [H] e rimuovere le staffe a omega [F] dalla scatola a muro [A] (Fig.3).
- 3) Rimuovere i dadi [S] dai perni [R](Fig.3).
- 4) Infilare in successione i quattro schermi in plexiglass [Q] sui perni [R] sui bordi della scatola [A] e fissarli con i dadi [S](Fig.3).
- 5) Infilare le due staffe a omega [F] sui rispettivi perni e fissarle nuovamente con i dadi [H](Fig.3).
- 6) Rimuovere la scatola [C] dalla staffa a muro [A] svitando le viti [E] (vedi Fig.1).
- 7) Fissare alla parete la struttura a muro [A] attraverso i fori [G] Nota: è preferibile che i fori filettati [N] sia rivolti verso il basso.
- 8) Eseguire il collegamento elettrico al morsetto [B] all'interno della scatola [C] (Fig.4).
- 9) Riposizionare la scatola [C] sulla staffa a muro [A] bloccandola con le viti [E] (Fig.1).
- 10) Inserire le lampadine nei portalampade.
- 11) Riposizionare il diffusore [D] sulle staffe [F] inserendo i due perni [M] nei fori non filettati [L].
- 12) Infine bloccare il diffusore avvitando le due viti [P] nei fori filettati [N].

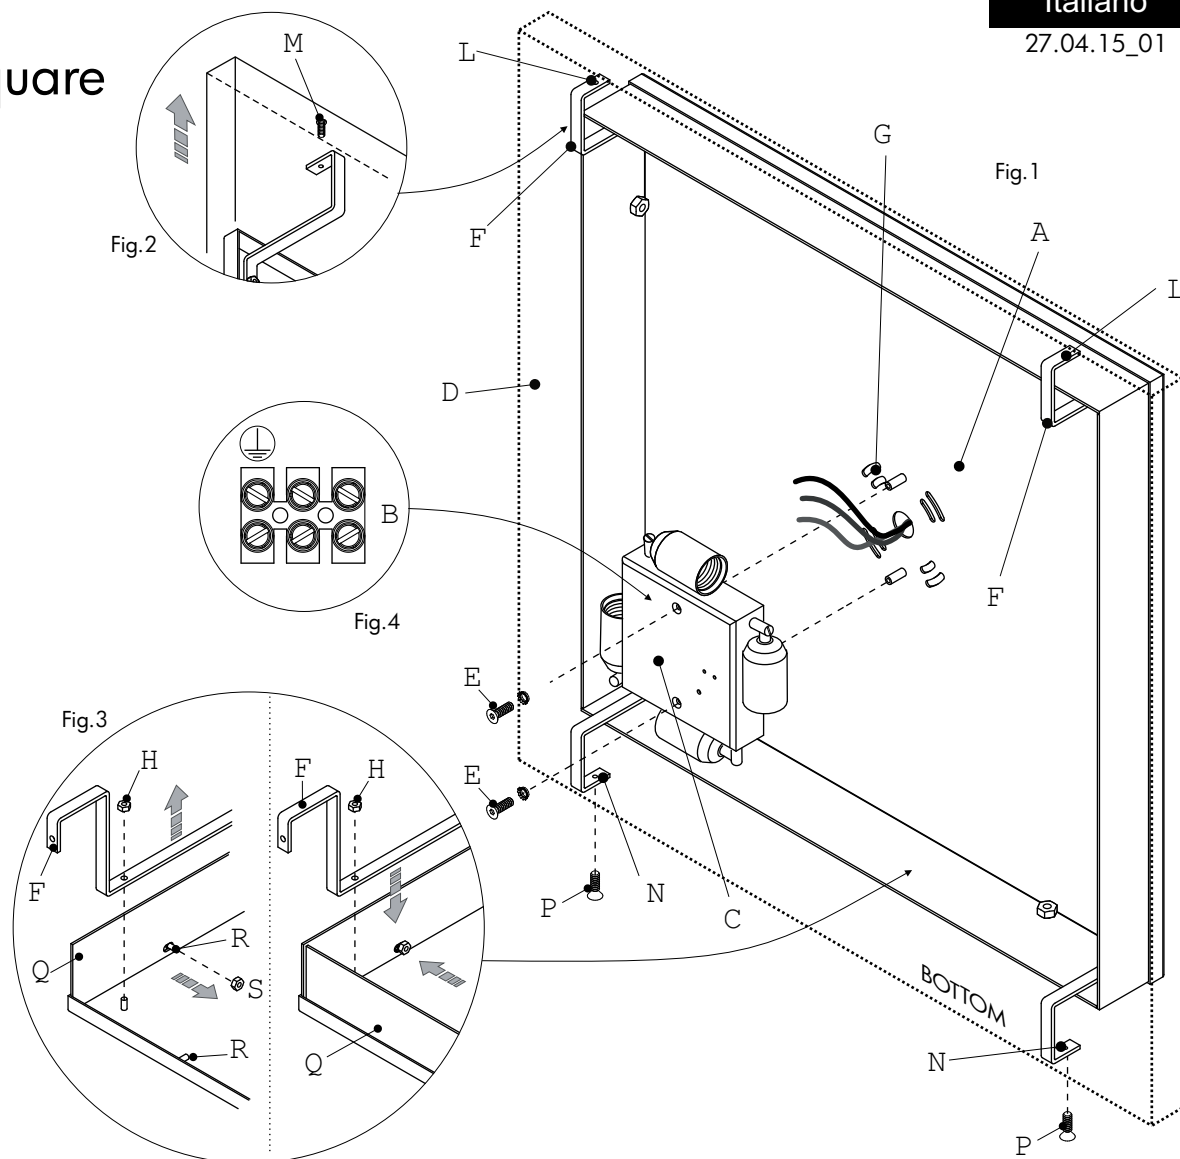

Italiano

27.04.15_01

Garanzie

La Studio Italia Design garantisce i suoi prodotti essere privi da difetti di materiale e di lavorazione per la durata di un anno dalla consegna. Durante tale periodo la Studio Italia Design riparerà o sostituirà, a sua discrezione, i prodotti che hanno dato prova di difetto. Questa garanzia non è applicata a danni risultanti dall'incidente, alterazione, manomissione, abuso e negligenza.

Questa garanzia non è applicata alle lampadine, che non sono prodotti fatti dalla Studio Italia Design e fornite dalla Studio Italia Design solo come una comodità.

STUDIO
ITALIA DESIGN

www.studioitaliadesign.com / info@studioitaliadesign.com / Via Pialoi, 32, 30020, Marcon, Venezia, ITALY

Conservare le istruzioni per una manutenzione futura
Le operazioni indicate devono essere eseguite da personale qualificato



GRACE AP3-PL3-AP2-PL2

Wall & Ceiling | Medium & Large Square

220-240V 50/60 Hz



L max cm 12

4x max 18W CFL compact (E27)




L max cm 12

4x max Classic A60 LED (E27)

Before installing turn off the power to the electrical box

MOUNTING INSTRUCTIONS

- 1) Remove the screws [P] to release the shade [D] and pull it up and release it from the pins [M] (see detail on Fig.1 and Fig.2).
- 2) Remove the nuts [H] to release the brackets [F] (Fig.3).
- 3) Remove the nuts [S] from the pins [R](Fig.3).
- 4) Insert the four Perspex diffusers [Q] over the pins [R] along the edges of the fixture and secure them in position with the nuts [S](Fig.3).
- 5) Place the brackets [F] back and secure them with the nuts [H](Fig.3).
- 6) Undo the screws [E] and remove the metal box [C] from the frame [A](see Fig.1).
- 7) Secure the frame [A] to the wall/ceiling using appropriate fixings [G] Pay attention to leave the threaded holes [N] on the recommended side: bottom side.
- 8) Make the connection of the power supply to the terminal block [B] located inside the metal box [C] (see detail on Fig.4).
- 9) Place the metal box [C] back on the frame [A] and secure it in position with the screws [E] (Fig.1).
- 10) Insert the suggested lamps on the lamp holders.
- 11) Place the shade [D] back on the frame [A], start with inserting the pins [M] on the unthreaded holes [L] (see detail on Fig.1).
- 12) Secure the shade in position fastening the screws [P] on the threaded holes [N].

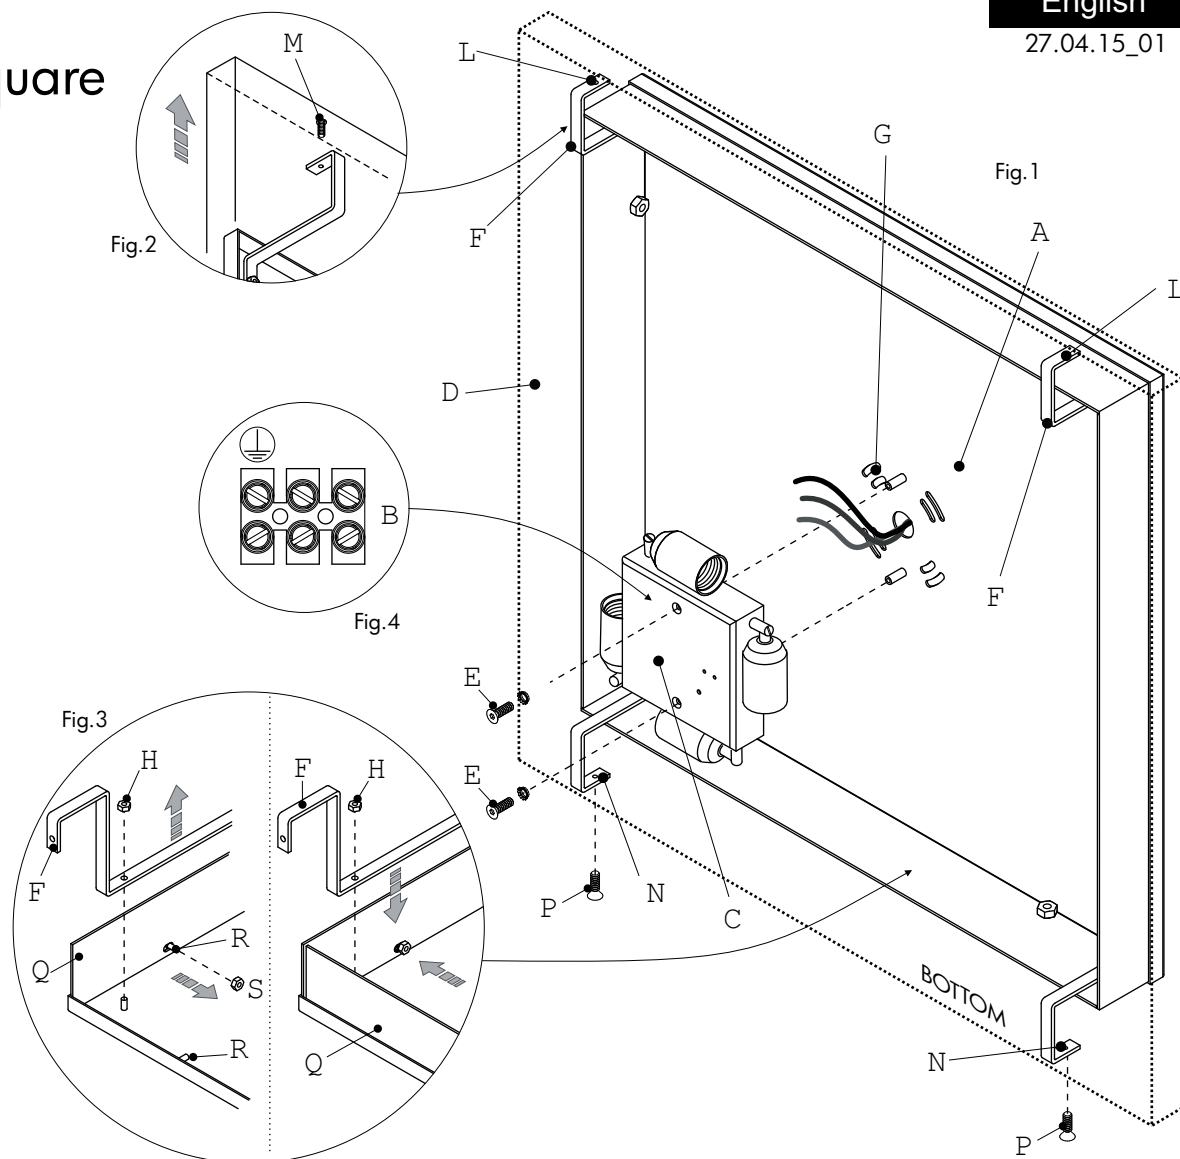

Warranty

Studio Italia Design warrants its to be free from defects in materials and workmanship for a period of one year date of delivery. During this warranty period Studio Italia Design will repair or replace, at its option, product that are proven to be defective. This warranty does not apply to damages resulting from accidental, alteration, tampering, misuse, negligence or abuse.

This warranty does not apply to light bulbs, which are not products manufactured by Studio Italia Design and supplied by Studio Italia Design only as an accomodation.

STUDIO
ITALIA DESIGN

www.studioitaliadesign.com / info@studioitaliadesign.com / Via Pialoi, 32, 30020, Marcon, Venezia, ITALY



Keep these instructions for future reference
To be installed by a qualified licensed electrician only



English

27.04.15_01

GRACE PL-PL1

Ceiling | Large Cylinder - Medium Cylinder

220-240V 50/60 Hz

Ita-Eng

22.04.15_00

-  3x max 46W eco Classic A60 (E27)
- PL  3x max 30W CFL (E27)
-  3x max Classic A60 LED (E27)

-  3x max 46W eco Classic A60 (E27)
- PL1  3x max 23W CFL compact (E27)
L max cm 12
-  3x max Classic A60 LED (E27)

Disinserire la tensione prima di operare sull'apparecchio.

ISTRUZIONI DI MONTAGGIO

- 1) Svitare il dischetto [H] per rimuovere il vetro [D] (vedi Fig.1).
- 2) Svitare i tre cilindri [E] all'interno della montatura al fine di rimuovere la scatola [A] (aiutarsi con un cacciavite, Fig.2).
- 3) Fissare al soffitto la scatola [A] attraverso i fori asolati [G].
- 4) Eseguire il collegamento elettrico ai morsetti [B].
- 5) Bloccare la montatura [C] alla scatola riavvitando i cilindri di fissaggio [E] sui tre perni [F](Fig.1 e Fig.2).
- 6) Inserire le lampadine nei portalampade.
- 7) Riposizionare il vetro [D] avvitando il dischetto [H] senza stringere troppo.

Before installing turn off the power to the electrical box

MOUNTING INSTRUCTIONS


- 1) Undo the disc-head screw [H] and remove the glass [D] (see Fig.1).
- 2) Undo the three cylinder nuts [E] that are inside the shade and then remove the ceiling plate [A] (use a screwdriver, Fig.2).
- 3) Fix the plate [A] to the ceiling through the slots [G] using appropriate fasteners.
- 4) Make the connection of the power supply to the terminal blocks [B].
- 5) Place the shade [C] back on the ceiling plate, fasten the three cylinder nuts [E] on the threaded rods [F](Fig.1 and Fig.2).
- 6) Install the light bulbs.
- 7) Place the glass [D] back and secure it in position with the disc-head screw [H], pay attention not to over-tighten.

Garanzie | Warranty

La Studio Italia Design garantisce i suoi prodotti essere privi da difetti di materiale e di lavorazione per la durata di un anno dalla consegna. Durante tale periodo la Studio Italia Design riparerà o sostituirà, a sua discrezione, i prodotti che hanno dato prova di difetto. Questa garanzia non è applicata a danni risultanti dall'incidente, alterazione, manomissione, abuso e negligenza. Questa garanzia non è applicata alle lampadine, che non sono prodotti fatti dalla Studio Italia Design e fornite dalla Studio Italia Design solo come una comodità.

Studio Italia Design warrants its to be free from defects in materials and workmanship for a period of one year date of delivery. During this warranty period Studio Italia Design will repair or replace, at its option, product that are proven to be defective. This warranty does not apply to damages resulting from accidental, alteration, tampering, misuse, negligence or abuse.

This warranty does not apply to light bulbs, which are not products manufactured by Studio Italia Design and supplied by Studio Italia Design only as an accommodation.

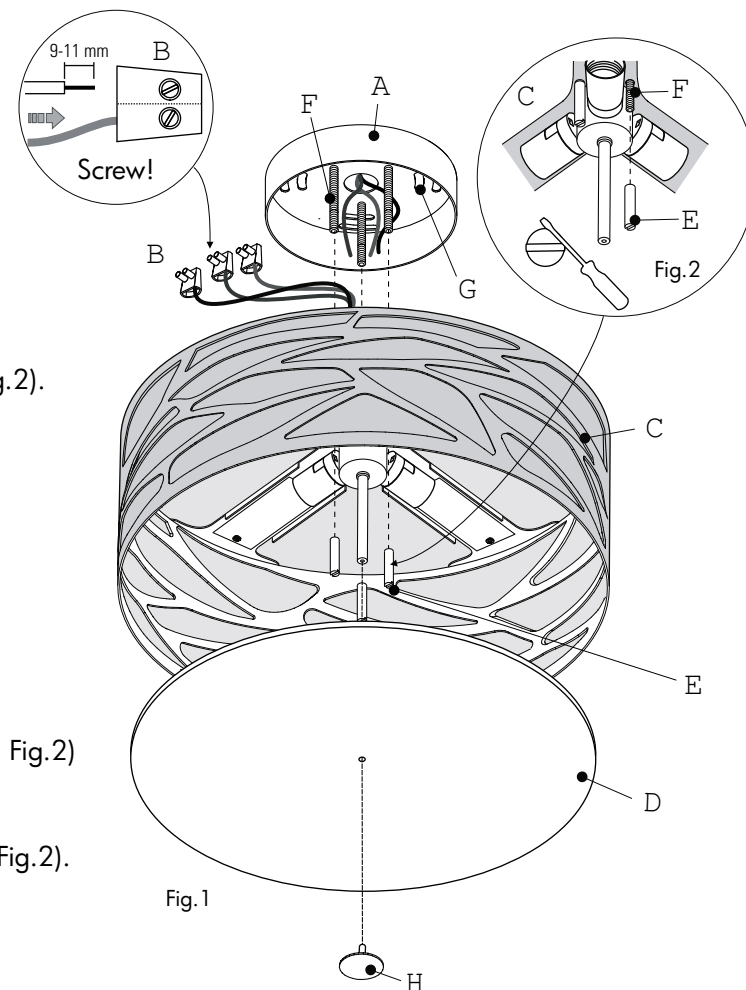

Conservare le istruzioni per una manutenzione futura | Keep these instructions for future reference
Operazioni da far eseguite a personale qualificato | To be installed by a qualified licensed electrician only

**STUDIO
ITALIA DESIGN**

www.studioitaliadesign.com / info@studioitaliadesign.com / Via Pialoi, 32, 30020, Marcon, Venezia, ITALY

